

QRA for HP Pipelines in the Greater McArthur Growth Area

For NSW Department of Planning, Industry and Environment

26 March 2021



Doc. No.: J-000431-01

Revision: 0



Arriscar Pty Limited
ACN 162 867 763
www.arriscar.com.au

Sydney
Level 26
44 Market Street
Sydney NSW 2000
T: +61 2 9089 8804

Melbourne
Level 2 Riverside Quay
1 Southbank Boulevard
Southbank VIC 3006
T: +61 3 9982 4535

DISTRIBUTION LIST

Name	Organisation	From (Issue)	To (Issue)
Neala Gautam	NSW Department of Planning, Industry and Environment	A	Current

DOCUMENT HISTORY AND AUTHORISATION

Rev	Date	By	Description	Check	Approved
A	03 Feb 2021	JL	First draft for client review.	PS	JL
0	26-Mar-2021	JL	Incorporating client comments for final release	PS	JL

Summary

Arriscar Pty Ltd (Arriscar) has been engaged by the NSW Department of Planning, Industry and Environment (DPIE) to undertake a risk assessment from high pressure gas pipelines in the Greater McArthur Growth Area (GMGA) in NSW.

The main objectives of the study include:

- (a) Estimation of the individual fatality risk and societal (fatality) risk for the HP pipelines in the GMGA;
- (b) Assessment of the individual fatality risk and societal (fatality) risk against the existing criteria for fixed potential hazardous facilities described in Hazardous Industry Planning Advisory Papers No. 4 and 10 [1], [2].
- (c) Generation of sufficient risk-based land use safety information to assist the Department in understanding the extent and magnitude of the potential risks from HP pipelines to the surrounding land uses in the GMCA.

Conclusions and recommendations

The pipelines in the GMGA generate risk levels that are above some of the individual risk criteria contained in HIPAP 10. More intensive development in the GMGA may also lead to excursions of the corresponding societal risk criteria. There is a need to develop a suitable strategic land use plan to ensure development within the GMGA near high pressure pipelines does not exceed NSW DPIE risk criteria. This study makes recommendations on development controls designed to ensure compliance with the risk criteria.

The recommendations are:

1. Implement a buffer zone between the pipelines and any residential use development;
 - a. For the majority of the GMGA growth area, where all three pipelines run parallel in a common corridor in a North-South direction, there should be no residential development within 125m of the (Jemena) Central Trunk Main (CTM) so as to satisfy the DPIE residential land use criteria for individual risk.
 - b. Where the path of the EGP diverges from the CTM and MSE in the northern and southern regions of the GMGA land release area, there should be no residential development between the pipelines and the 1.0E-06 LSIR contours shown in red in Figure 1 and Figure 2.
2. Implement a buffer zone between the pipelines and any sensitive use developments such as schools, childcare facilities, hospitals or aged-care facilities;
 - a. For the majority of the GMGA growth area, where all three pipelines run parallel in a common corridor in a North-South direction, there should be no sensitive use development within 200m of the CTM.
 - b. Where the path of the EGP diverges from the CTM and MSE in the northern and southern regions of the GMGA land release area, there should be no sensitive use development between the pipelines and the 0.5E-06 LSIR contours shown in orange in Figure 1 and Figure 2.
3. To satisfy the DPIE societal risk criteria, land use immediately either side of the pipeline corridor where the three pipelines run parallel should be restricted to uses where the

average population density is 0.0126 ppl/m². Based on the 2015 SGS Economic and Employment Analysis [3], this could include large format retail, local industry, subregional industry and footloose. Other non-commercial / industrial uses such as recreation would also be suitable provided the average density remains at or below 0.0126 ppl/m².

4. Consent should not be granted to any planning or development proposal within the measurement length of the respective pipelines that could increase population density above 0.0126 ppl/m² unless accompanied by a hazard analysis consistent with HIPAP 6 and HIPAP 10, demonstrating the DPIE individual and societal risk criteria are satisfied.

Figure 1: Location Specific Individual Risk Contours in the Northern Part of the Land Release Area


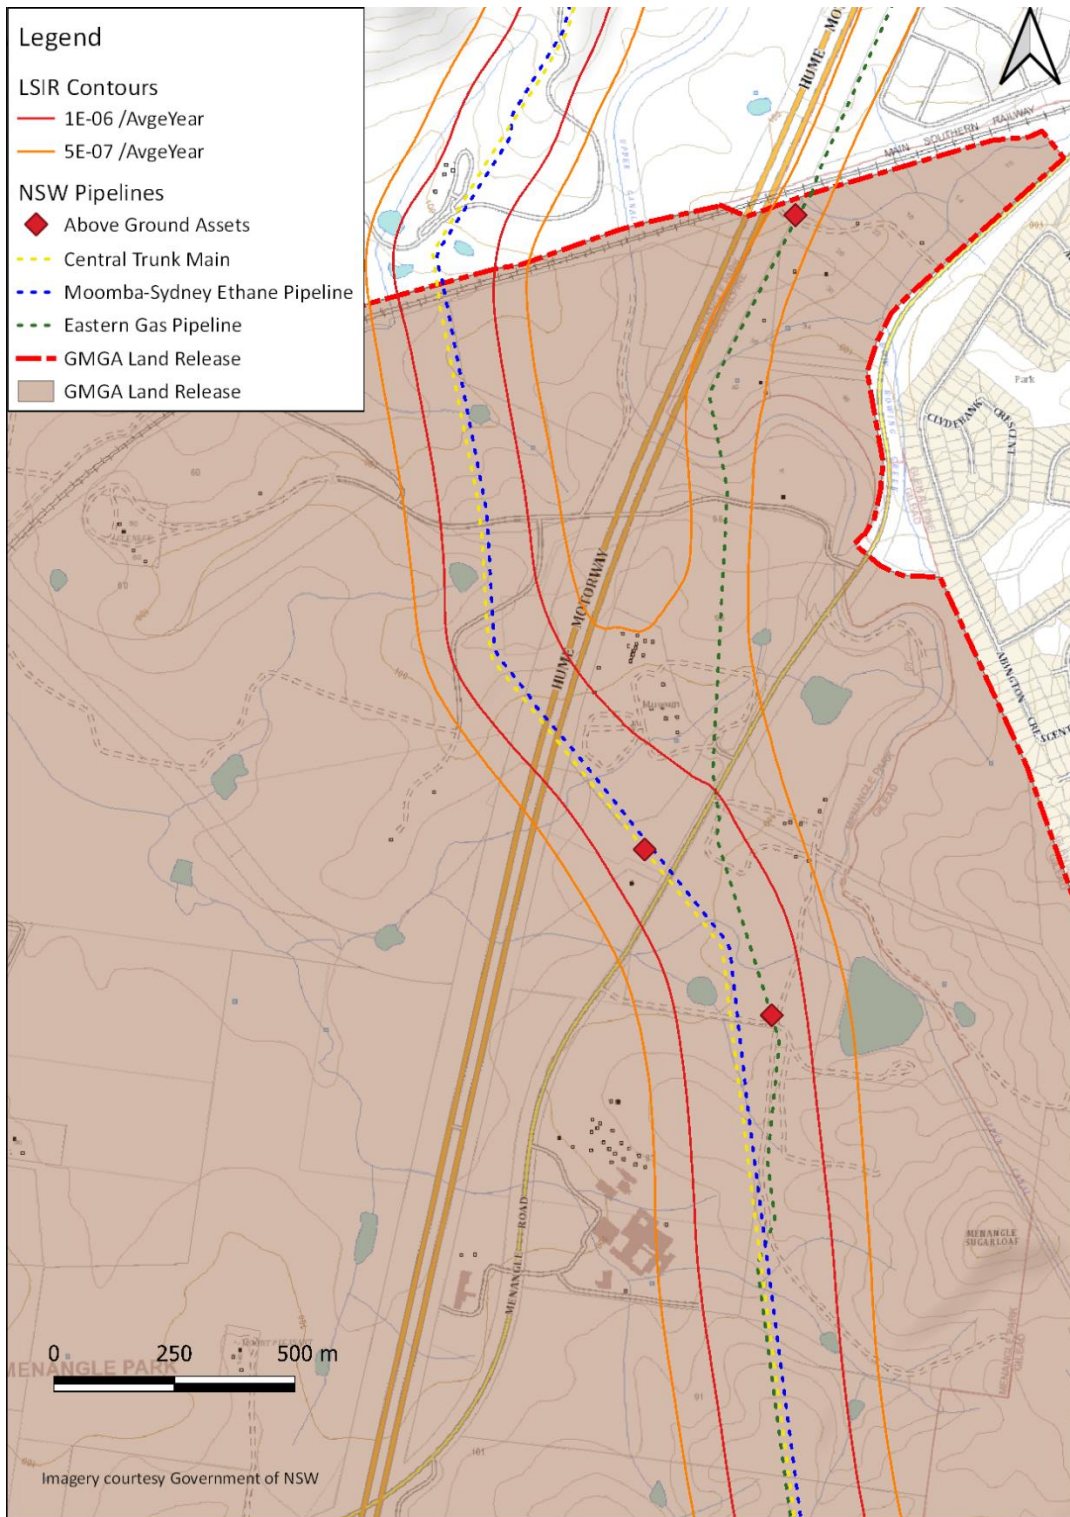


Figure 2: Location Specific Individual Risk Contours in the Southern Part of the Land Release Area

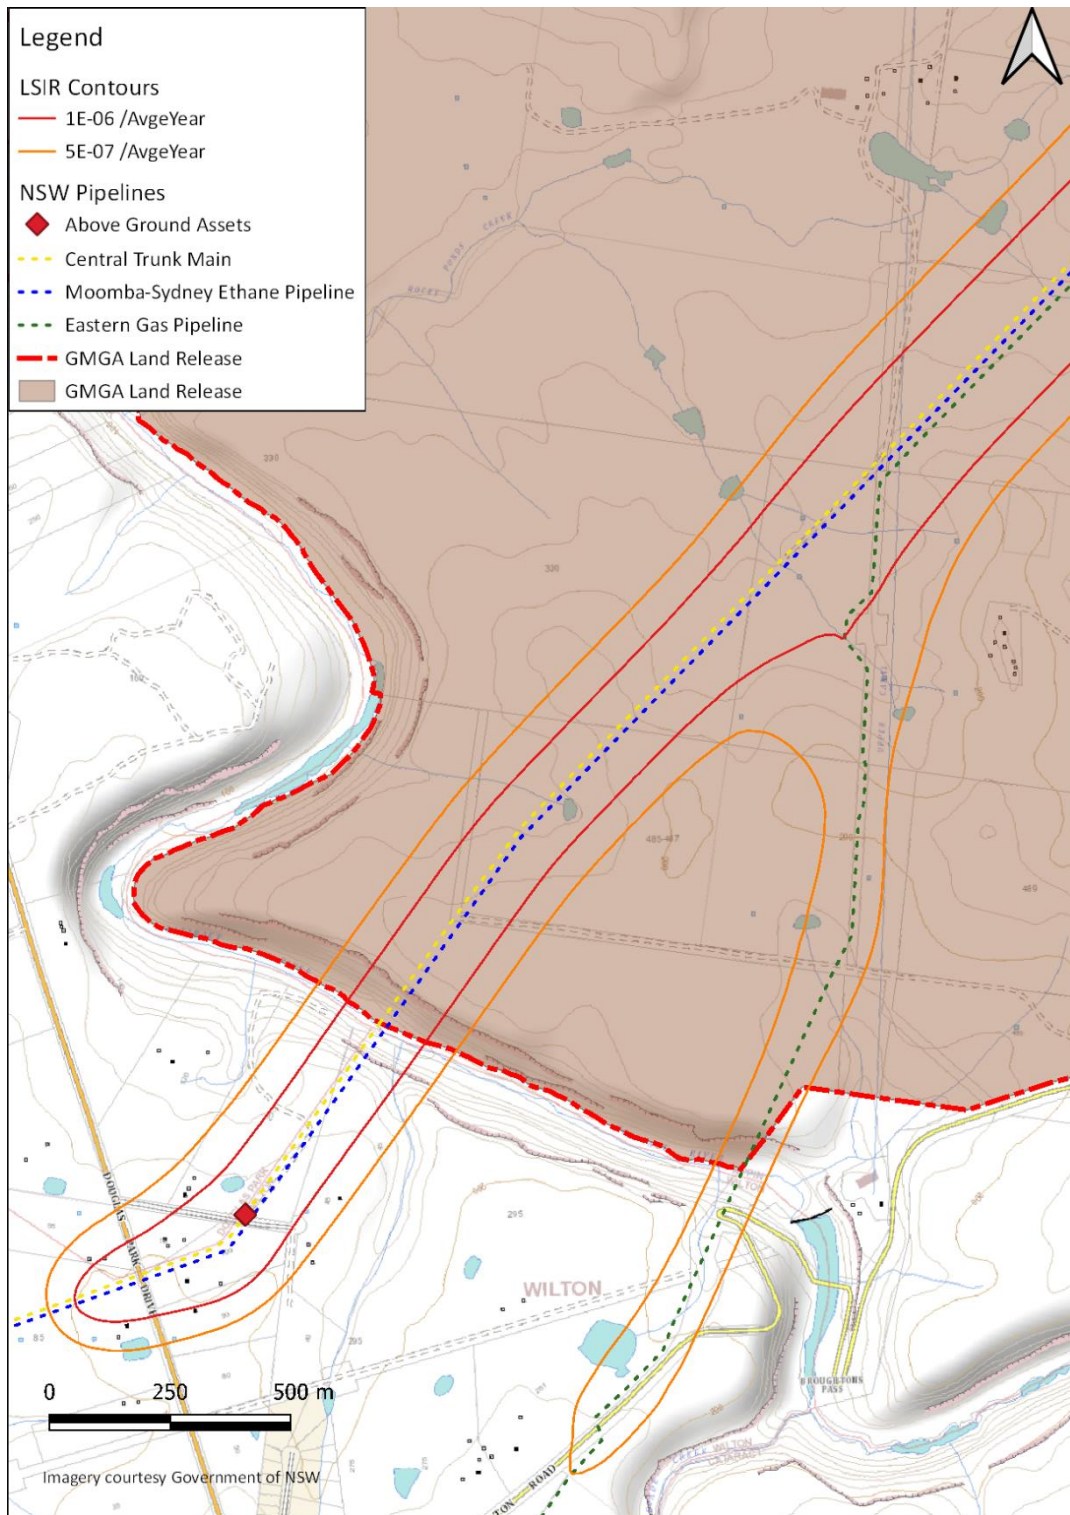


Additionally, the NSW DPIE should consult with pipeline operators on changes to the pipelines and pipeline protection that could further mitigate risk, such as:

- Additional protection against third party damage;
- Decreasing the interval between isolation valves such as automatic line break valves and main line valves;
- Preferred placement and type of roads within developments

- Advise development proponents to consult with pipeline owners and/or operators for individual development proposals so that Safety Management Studies, as required by AS 2885.6 when the land use changes, or there is an encroachment or activity on the easement, can effectively identify threats to the pipeline and implement appropriate mitigation measures.

For completeness, the cumulative 1.0×10^{-6} and 0.5×10^{-6} LSIR contours for all three pipelines within the entire GMGA land release area are shown in Figure 3.

Figure 3: Cumulative LSIR Contours for all Three Pipelines within the GMGA Land Release Area

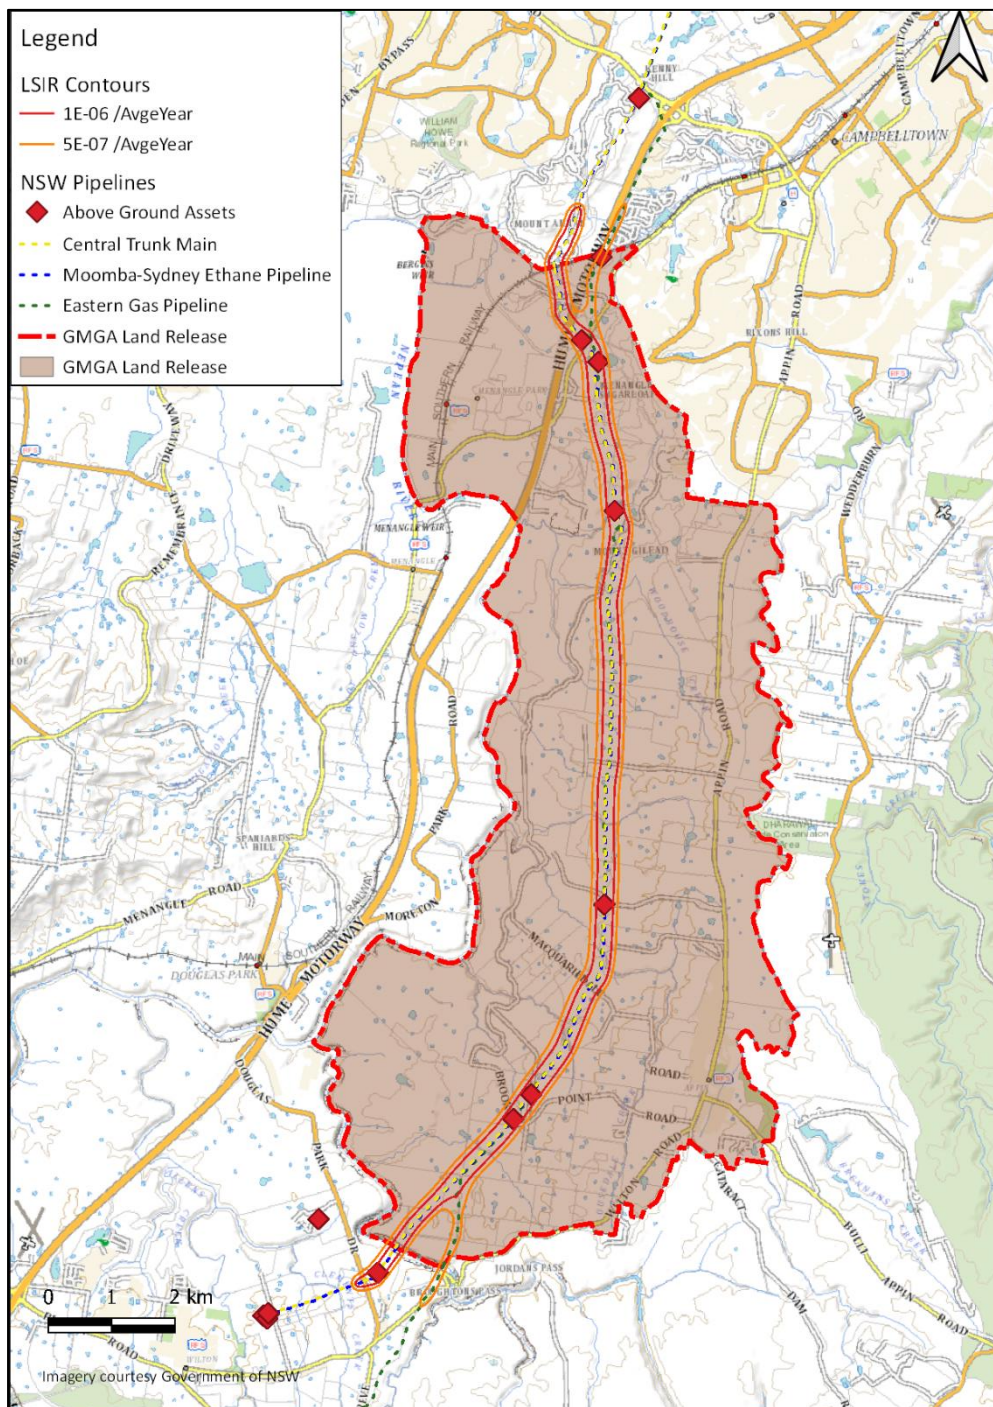

Contents

Summary.....	3
Notation.....	12
1 Introduction	13
1.1 Background.....	13
1.2 Scope	13
1.3 Study Objectives.....	13
1.4 Study Scope	13
2 Description of the Greater MacArthur Growth Area.....	15
2.1 Overview.....	15
2.2 Population	17
2.3 Meteorology	20
3 Overview of Gas Facilities in the GMGA	22
3.1 Introduction	22
3.2 Moomba to Sydney Ethane Pipeline	23
3.3 Natural Gas Pipelines	25
4 Risk Assessment Methodology	26
4.1 Introduction.....	26
4.2 Methodology Overview	26
4.2.1 Hazard Identification and Register of Major Accident Events.....	26
4.2.2 Hazard Consequence Analysis.....	27
4.2.3 Impairment Criteria.....	28
4.2.4 Frequency and Likelihood Analysis.....	29
4.2.5 Risk Analysis and Assessment	30
4.3 Study Assumptions.....	30
4.4 Quantitative Risk Criteria.....	30
4.4.1 Individual Fatality Risk	30
4.4.2 Injury Risk	31
4.4.3 Risk of Property Damage and Accident Propagation.....	31
4.4.4 Societal Risk	32
4.5 Qualitative Risk Criteria	33
4.6 Approach to Achieving Study Objectives.....	33
5 Hazard Identification.....	34
5.1 Introduction.....	34
5.2 Properties of Ethane and Natural Gas.....	34
5.2.1 Ethane	34
5.2.2 Natural Gas	34
5.3 Pipeline Failure Modes	35
5.3.1 Mechanical Failure	35
5.3.2 Corrosion	35
5.3.3 Ground Movement and Other Failure Modes	36
5.3.4 Third Party Activity.....	36
5.4 Consequences of Gas Release.....	36
5.4.1 Asphyxiation	36
5.4.2 Jet Fire	37
5.4.3 Flash Fire.....	37
5.4.4 Vapour Cloud Explosion.....	37

5.4.5	Gas Ingress into Buildings	37
5.4.6	Toxic Smoke	37
5.4.7	Incident Escalation in Pipeline Easement	38
5.5	Control Measures.....	38
5.5.1	Prevention of Mechanical Failure	38
5.5.2	Corrosion Prevention	38
5.5.3	Prevention of Damage due to Ground Movement and Other Failures	39
5.5.4	Prevention of Damage due to Third Party Activity.....	39
5.5.5	Mitigation Control Measures	39
5.6	MAEs for Risk Analysis.....	39
6	Consequence Analysis	40
6.1	Release of Flammable Liquid / Gas	40
6.1.1	Representative Hole Diameter.....	40
6.1.2	Rate of Release	40
6.1.3	Height and Orientation of Release	40
6.1.4	Duration of Release.....	40
6.2	Fire Modelling.....	41
6.2.1	Jet Fire	41
6.2.2	Flash Fire.....	41
6.3	Vapour Cloud Explosion.....	41
7	Frequency and Likelihood Analysis.....	42
7.1	Likelihood of Gas Release	42
7.2	Probability of Ignition	42
7.3	Likelihood of Escalation in Pipeline Easement	42
7.4	Likelihood of Representative MAEs.....	42
8	Risk Analysis.....	43
8.1	Individual Risk of Fatality.....	43
8.2	Risk of Acute Toxic Injury or Irritation	51
8.3	Risk of Property Damage and Accident Propagation (Exceeding 14 kPa)	51
8.4	Risk of Property Damage and Accident Propagation (Exceeding 23 kW/m ²).....	51
8.5	Risk of Injury (Exceeding 7 kPa).....	51
8.6	Risk of Injury (Exceeding 4.7 kW/m ²)	51
8.7	Qualitative Risk Criteria	51
8.8	Societal Risk	52
8.9	Risk Reduction Measures.....	54
9	Findings and Recommendations.....	55
9.1	Findings	55
9.2	Recommendations	55
10	References	57
Appendix A	Assumptions	60
A.1	Operational Data.....	62
A.2	Locational Data	63
A.3	Risk Analysis Methodology	69
A.4	Consequence Analysis	70
A.5	Likelihood Analysis	78
A.6	Vulnerability Parameters.....	80
Appendix B	Consequence Analysis – Example Data and Results.....	84

B.1	Representative Hole Diameters	84
B.2	Consequence Analysis Results for Representative Release Scenarios.....	88
Appendix C	Likelihood Analysis - Data and Results	100
C.1	Likelihood of Release from Underground Pipelines	100
C.1.1	Ethane	101
C.1.2	Natural Gas	103
C.1.3	Likelihood of Representative Release Scenarios	106
C.2	Ignition Probability	107

List of Figures

Figure 1:	Location Specific Individual Risk Contours in the Northern Part of the Land Release Area	5
Figure 2:	Location Specific Individual Risk Contours in the Southern Part of the Land Release Area.....	6
Figure 3:	Cumulative LSIR Contours for all Three Pipelines within the GMGA Land Release Area	7
Figure 4	Location of the GMGA Land Release Area with Respect to Sydney	15
Figure 5	Greater Macarthur Structure Plan (land release areas) [4]	16
Figure 6	GMGA Urban Renewal Areas [4].....	17
Figure 7	Indicative Density Distribution [4].....	18
Figure 8	Routes of High Pressure Pipelines in the GMGA Land Release Area	23
Figure 9	Overview of QRA Process [1]	26
Figure 10	Indicative Societal Risk Criteria	32
Figure 11:	Cumulative LSIR Contours for All three Pipelines Combined	43
Figure 12	Combined LSIR Contours for MSE, CTM and EGP in the Central Part of the GMGA Land Release Area.....	44
Figure 13	LSIR Contours for the EGP in the Central Part of the GMGA Land Release Area.....	46
Figure 14	LSIR Contours CTM in the Central Part of the GMGA Land Release Area	47
Figure 15:	LSIR Contours MSE in the Central Part of the GMGA Land Release Area	48
Figure 16	LSIR Contours for MSE, CTM and EGP in the Northern Part of the GMGA Land Release Area	49
Figure 17	LSIR Contours for MSE, CTM and EGP in the Southern Part of the GMGA Land Release Area	50
Figure 18	Societal Risk	53

List of Tables

Table 1	Recommended Dwelling Densities per hectare [5]	19
Table 2	Working Population Density	19
Table 3	Weather Categories and Selected Parameters	20
Table 4	Distribution of Weather Categories by Stability Class and Wind Direction	21
Table 5	Ethane Pipeline	23
Table 6	Natural Gas Pipelines	25
Table 7	Effects of Explosion Overpressure.....	28
Table 8	Effects of Thermal Radiation.....	29
Table 9	Individual Fatality Risk Criteria.....	30
Table 10	Physical Properties of Ethane	34
Table 11	Physical Properties of Methane	35
Table 12	List of MAEs	39
Table 13	Representative Hole Diameters Selected for Consequence Analysis	40
Table 14	Surface Roughness Length.....	65
Table 15	Proportion of Population Indoor and Outdoor During Day and Night [TNO]	68
Table 16	Representative Hole Diameters Selected for Consequence Analysis	72

Table 17	Probability of Fatality for Exposure to Heat Radiation (Outdoor)	80
Table 18	Effects of Thermal Radiation.....	81
Table 19	Probability of Fatality from Exposure to Peak Side on-Overpressure (Outdoor)	83
Table 20	Probability of Fatality from Exposure to Peak Side on-Overpressure (Indoor)	83
Table 21	Dimensions of Leaks for Above Ground or Underground Cross-Country Natural Gas or Propylene Pipelines (UKOPA - Reported Values Only).....	84
Table 22	Dimensions of Rupture Events for Underground Natural Gas Steel Pipelines (US DoT - Reported Values Only).....	86
Table 23	Dimensions of Puncture Events for Underground Natural Gas Steel Pipelines (US DoT - Reported Values Only).....	86
Table 24	Sub-Section Distances for the MSE	88
Table 25	Sub-section Pressures for the MSE.....	89
Table 26	Sub-section Distances for the CTM	89
Table 27	Sub-section Pressures for the CTM	89
Table 28	Sub-section Distances for the EGP	90
Table 29	Sub-section pressures for the EGP	90
Table 30	Distances to LFL for MSE Releases	91
Table 31	Distances to LFL for CTM Releases	92
Table 32	Distances to LFL for EGP Releases	93
Table 33	Distances (m) Downwind to Selected Radiation Intensity for MSE Releases.....	94
Table 34	Distances (m) Downwind to Selected Radiation Intensity for CTM Releases	95
Table 35	Distances (m) Downwind to Selected Radiation Intensity for EGP Releases	96
Table 36	Explosion Distances for MSE Releases.....	98
Table 37	Explosion Distances for CTM Releases	99
Table 38	Explosion Distances for EGP Releases	99
Table 39	Leak Frequencies for Underground LPG Pipelines	101
Table 40	Approx. Leak Frequencies for Underground Ethane Pipeline	102
Table 41	Leak Frequencies for Underground HVL Pipelines (Excluding Ammonia).....	103
Table 42	Leak Frequencies for Underground Natural Gas Pipelines	103
Table 43	Approx. Leak Frequencies for Jemena Eastern Gas Pipeline (EGP)	104
Table 44	Approx. Leak Frequencies for Jemena Gas Network (CTM) Trunk Pipeline.....	105
Table 45	Leak Frequencies for Underground Natural Gas Transmission Pipelines	105
Table 46	Release Frequency – Ethane Pipeline.....	106
Table 47	Release Frequency – Jemena Eastern Gas Pipeline (EGP)	106
Table 48	Release Frequency – Jemena Gas Network Central Trunk Main (CTM)	106
Table 49	Ignition Probability - UKOPA.....	108
Table 50	Ignition Probability – OGP Scenario 3.....	108
Table 51	Ignition Probability – US DoT	109
Table 52	Ignition Probability – UK HSE (RR 1034)	110
Table 53	Ignition Probability – Acton & Baldwin.....	111
Table 54	Ignition Probability – EGIG.....	111
Table 55	Ignition Probability – UK HSE (RR 1034)	112
Table 56	Ignition Probability – Data Cited by UK HSE (RR 1034).....	112

Notation

Abbreviation	Description
ALBV	Automatic Line Break Valve
Arriscar	Arriscar Pty Limited
BoM	Bureau of Meteorology
CTM	(Jemena) Central Trunk Main
DA	Development Application
DPIE	Department of Planning Industry and Environment
EGP	(Jemena) Eastern Gas Pipeline
GMGA	Greater Macarthur Growth Area
HIPAP	Hazardous industry Advisory Paper
kPa	kilo Pascal
kW / m ²	kilo Watts per square metre
LFL	Lower Flammable Limit
LGA	Local Government Area
LSIR	Location Specific Individual Risk
MLV	Main Line valve
MSE	Moomba-Sydney Ethane (pipeline)
QRA	Quantitative Risk Assessment
TPA	Third Party Activity
UFL	Upper Flammable Limit

1 INTRODUCTION

1.1 Background

Arriscar Pty Ltd (Arriscar) has been engaged by the NSW Department of Planning, Industry and Environment (DPIE) to undertake a risk assessment from high pressure gas pipelines in the Greater McArthur Growth Area (GMGA) in NSW.

1.2 Scope

1.3 Study Objectives

The main objectives of the study include:

- (a) Estimation of the individual fatality risk and societal (fatality) risk for the HP pipelines in the GMGA;
- (b) Assessment of the individual fatality risk and societal (fatality) risk against the existing criteria for fixed potential hazardous facilities described in Hazardous Industry Planning Advisory Papers No. 4 and 10 [1], [2].
- (c) Generation of sufficient risk-based land use safety information to assist the Department in understanding the extent and magnitude of the potential risks from HP pipelines to the surrounding land uses in the GMCA.

1.4 Study Scope

The scope of work that has been undertaken by Arriscar includes the following:

1. Consultation with the pipeline operator/s (APA and Jemena) to: determine the locations of the HP pipelines in the GMGA; verify the relevant parameters required for the QRA (e.g. operating pressure, temperature, pipe wall thickness, burial depth, etc.); and, identify the safeguards installed for prevention, detection and isolation of leaks.
2. Preparation of an assumptions register listing the assumptions for the QRA, the justification for each assumption and how each assumption potentially affects the outcome of the results. The assumptions used in the analysis will be agreed with the Department's Hazard Team.
3. Estimation of the individual fatality risk and societal (fatality) risk using a QRA approach for a representative segment of the pipeline easement through a representative populated area in the GMGA (c. 45 dwellings per hectare at +/- 400 m from pipeline). This is to be based on a representative easement with two HP Natural Gas pipelines and one HP Ethane pipeline. :
 - (a) Estimation of the individual fatality risk for a representative easement segment with two HP Natural Gas pipelines and one HP Ethane pipeline.
 - (b) Estimation of the societal risk for a representative easement segment (with two HP Natural Gas pipelines and one HP Ethane pipeline) with the representative population density at an increased setback from the easement (i.e. to determine the minimum setback required to comply with the Department's societal risk criteria assuming no change in the maximum proposed population density).
 - (c) Estimation of the societal risk for a representative easement segment (with two HP Natural Gas pipelines and one HP Ethane pipeline) with a 0 m setback and an increased or decreased representative population density (i.e. to determine the maximum population density that would comply with the Department's societal risk criteria assuming no setback limits).

Note: The calculations required for (b) and (c) will require iteration (i.e. re-running of the risk model to determine the required variable: set-back distance or population density limit).

All cases will be confirmed with the Department following consultation with the pipeline operators.

The methodology for risk estimation will be consistent with HIPAP No 6 [1].

- The individual fatality risk (Location specific individual risk or LSIR) will be estimated and presented as a risk transect (i.e. risk versus perpendicular distance from pipeline).
 - The societal (fatality) risk will be presented as an F-N curve.
4. Additional risk calculations (as outlined in item 3 above) to address the following specific cases (if found to be applicable following consultation with the pipeline operators and the Department):
 - A representative segment of above-ground HP pipelines in the GMGA (e.g. due to a river crossing).
 - Representative coal seam gas pipelines or compression facilities that are close to the HP Pipelines. This would be undertaken semi-quantitatively (i.e. not subject to full QRA).
 5. Based on the findings of the QRA:
 - (a) Determine if the proposed development near the HP Pipelines in the GMGA is appropriate from a strategic land use safety planning perspective (i.e. an assessment of compliance with relevant risk criteria).
 - (b) Estimate the maximum distance from the HP pipeline easement in the GMGA, where hazards and risks should be considered during assessment of a Development Application (DA) introducing a significant population.
 - (c) Determine the minimum setback required to comply with the Department's societal risk criteria assuming no change in the proposed maximum population density.
 - (d) Determine the maximum population density that would comply with the Department's societal risk criteria assuming no setback limits.
 - (e) Recommend measures to minimise risks from the HP pipelines in the GMGA.
 6. Preparation and submission of a draft report.
 7. Preparation and submission of a final report.

2 DESCRIPTION OF THE GREATER MACARTHUR GROWTH AREA

2.1 Overview

The vision for the Greater MacArthur Growth Area (GMGA) is set in the interim report Greater Macarthur 2040 [4], which is a land use and infrastructure implementation plan for the area as it develops and changes.

The GMGA is a region southwest of Sydney stretching from Appin in the Wollondilly Local Government Area (LGA) to Glenfield in the Campbelltown LGA and is split into two development areas pivoting around Campbelltown-MacArthur: a land release area to the Southwest where development will involve changing land uses from predominantly rural to urban uses (Figure 4 and Figure 5); and an area to the Northeast of Campbelltown-MacArthur where development is predominantly characterised by urban renewal (Figure 6).

As the urban renewal area is already developed, the focus of this study is on the land release area.

Figure 4 Location of the GMGA Land Release Area with Respect to Sydney

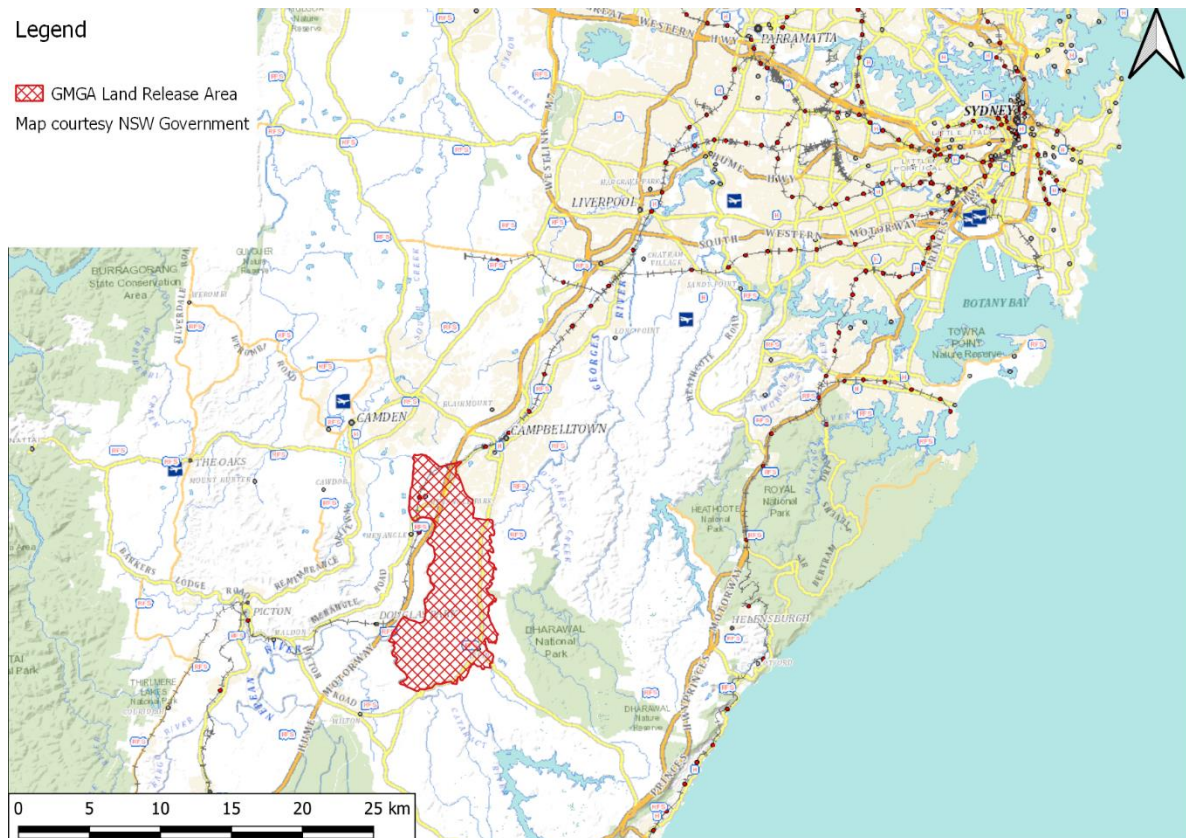


Figure 5 Greater MacArthur Structure Plan (land release areas) [4]


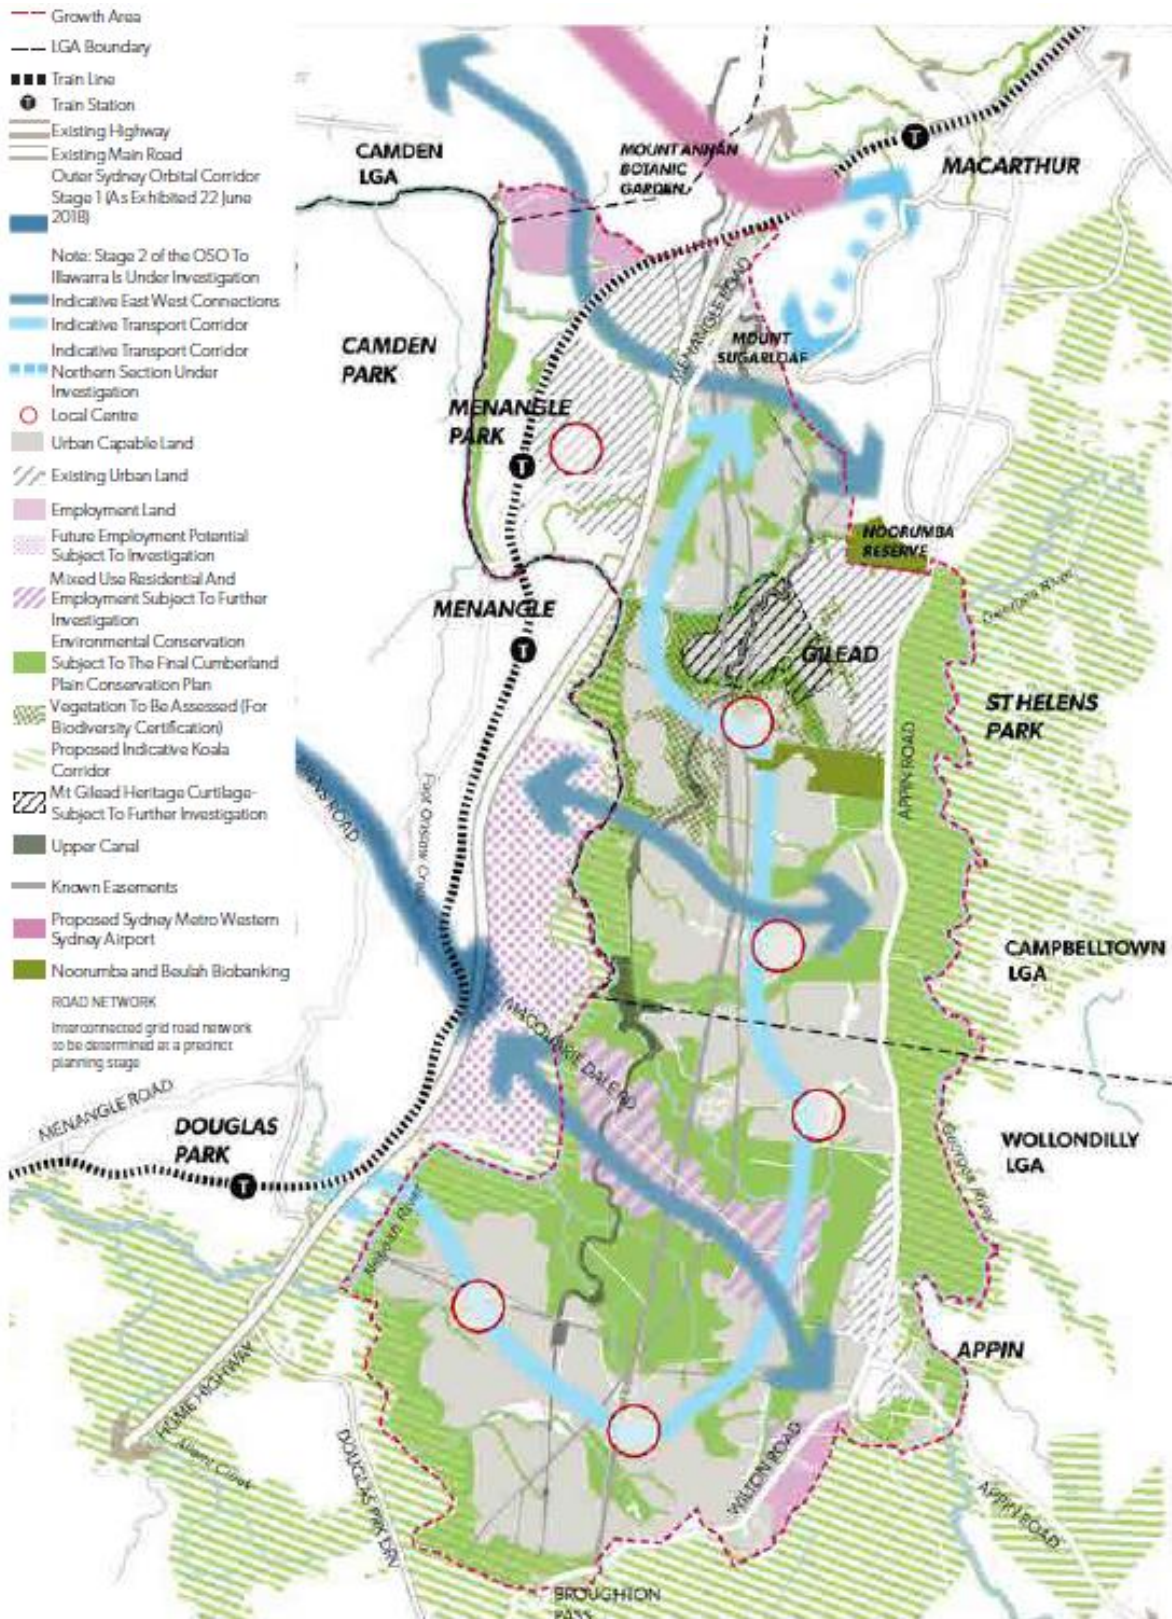



Figure 6 GMGA Urban Renewal Areas [4]

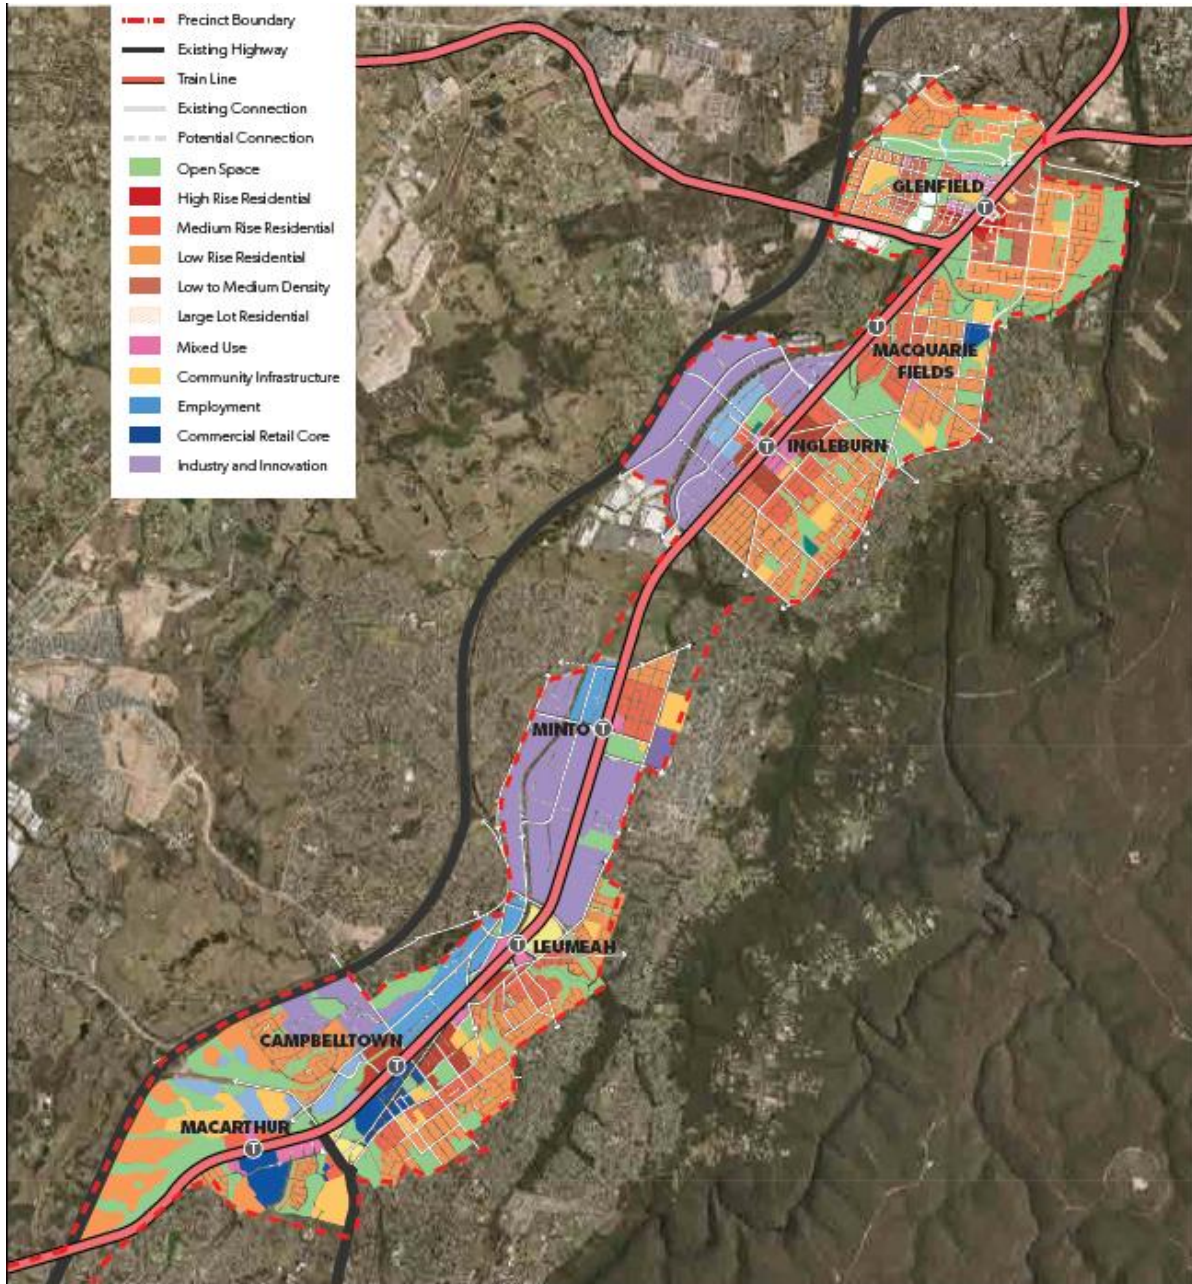

2.2 Population

The GMGA land release area is currently predominantly a rural population. As the area is developed, it is anticipated population density will increase. An indicative distribution of population density is shown in Figure 7, highlighting a corridor of medium density development.

Figure 7 Indicative Density Distribution [4]

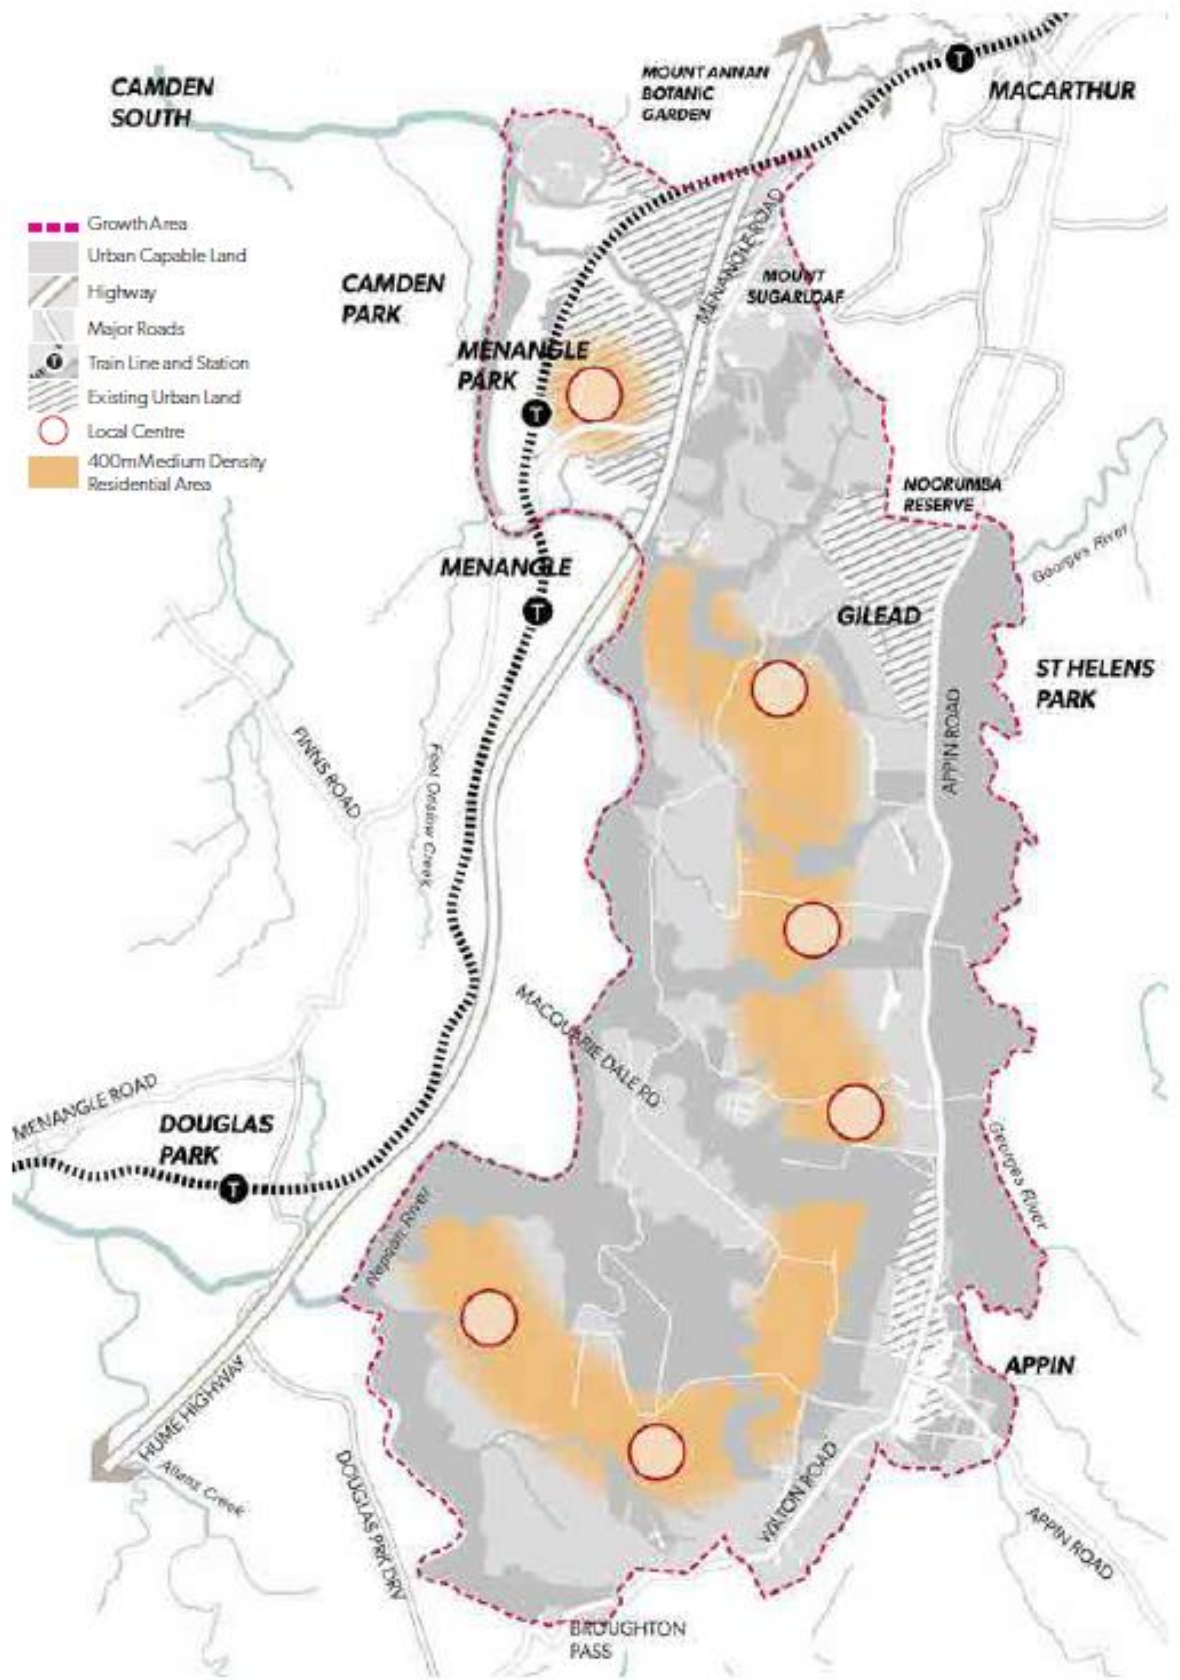

Population density recommendations for the land release area are contained in the Density Study for Greater MacArthur [5] undertaken by Urbis. The recommended dwelling densities from [5] are provided in Table 1.

Table 1 Recommended Dwelling Densities per hectare [5]

Zone	Min Density	Mid Density	Max Density
Very Low Density	10	12.5	15
Low Density	15	20	25
Medium Density	25	30	35
Highest Density	35	40	45

An Economic and Employment Analysis [3] used an occupancy rate of 2.8 people per household. The same ratio has been assumed for this study, resulting in a maximum population density of 0.0126 ppl/m².

From the same study [3], estimates for employment density are presented in Table 2.

Table 2 Working Population Density

Category of Land Use	Required floorspace (m ² / Job)	Floorspace to land area ratio	Land area per job (m ² /job)	Working Population (ppl / m ²)
Strategic centre retail and office	30	1	30	0.033
Other office and retail	35	0.75	47	0.021
Large format retail	70	0.3	233	0.0043
Local industry	100	0.3	333	0.0030
Subregional industry	140	0.3	467	0.0021
Footloose	150	0.3	500	0.002

The categories of land use are:

- **Strategic centre retail and office (SCRO):** Located in identified major centres, taking the form of multi-level, mixed-use buildings with ground floor retail, high public transport accessibility and is often centred on a train station or major bus route interchange. SCRO requires an urban setting.
- **Other office and retail (OOR):** Retail and commercial cluster servicing a local population. OOR is generally ground floor retail with office or shop-top residential above with on street parking or small carpark adjacent. OOR has good public transport connections and is often located proximate to civic buildings (town halls, libraries and so on). Examples: Town centres, corner shops, local shop cluster.

- **Large format retail (LFR):** Large, warehouse-style retail buildings typically surrounded by or including a large amount of car parking. Situated on commercial centre periphery or in independent clusters.
- **Local industry (LI):** Clustered in industrial areas, LI services a local area, typically small industrial lot sizes, workshop buildings with some possible office function. LI requires a large degree of functional hardstand for service delivery and operational space. Can be nearby surrounding residential and commercial community. Example: Car repairs; joinery and building supplies.
- **Subregional industry (SI):** SI is found clustered in large industrial areas and its role is to service a broad catchment. It is characterised by larger lot sizes and often large warehouse buildings are common. SI requires a large degree of functional hardstand for service delivery and operational space. SI requires physical separation from residential development and often has a low degree of public transport accessibility due to its remoteness. Subregional Industry requires high levels of car and truck access, close proximity to arterial roads and motorway on/off ramps and possible access to freight rail. Example: Subregional warehousing, freight & logistics (such as food distribution).
- **Footloose (F):** Footloose has little customer relation to its surrounding area as its primary function is to service a metropolitan or larger area. The land use is categorized by larger lot sizes and often with large warehouse buildings are common. Similar to SI, the Footloose CLU requires a large degree of functional hardstand for service delivery and operational space and requires physical separation from residential development. As per SI, Footloose needs high levels of car and truck access, close proximity to arterial roads and motorway on/off ramps and possible access to freight rail. Example: Manufacturing, major freight and logistics (such as DHL), regional distribution facilities.
- **Dispersed (D):** Industries that do not fit into local, subregional or footloose categories. Dispersed uses are not tied to industrial precincts and vary in size, location (hence being dispersed), and often role.

2.3 Meteorology

The closest Bureau of Meteorology (BoM) weather station to the area is Camden Airport Automatic Weather Station, ID: 068192. Data from the weather station has been processed into six weather categories based on wind speed and Pasquill stability. Wind speed, temperature, relative humidity and solar radiation for each category is presented in Table 3, Each category is distributed amongst 16 wind directions for use in the consequence analysis (Table 4).

Table 3 Weather Categories and Selected Parameters

Category	Wind Speed (m/s)	Temperature (°C)	Relative Humidity	Solar Radiation (kW/m ²)
1.8B	1.8	20.6	0.58	0.6
7.5D	7.5	21.7	0.42	0.4
3.9D	3.9	18.9	0.61	0.2
1.0D	1.0	13.1	0.84	0.0
2.6E	2.6	16.5	0.71	0.0
1.0F	1.0	12.1	0.87	0.0

Table 4 Distribution of Weather Categories by Stability Class and Wind Direction

Weather Category	Wind Direction																
	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
1.8B	0.017	0.015	0.008	0.007	0.004	0.005	0.005	0.008	0.004	0.003	0.003	0.006	0.002	0.004	0.009	0.025	0.125
7.5D	0.001	0.003	0.008	0.003	0.001	0.003	0.005	0.005	0.003	0.004	0.013	0.016	0.005	0.006	0.002	0.004	0.081
3.9D	0.016	0.014	0.026	0.026	0.015	0.019	0.026	0.040	0.029	0.021	0.019	0.018	0.005	0.006	0.008	0.021	0.310
1.0D	0.014	0.011	0.011	0.019	0.013	0.027	0.031	0.067	0.031	0.020	0.014	0.017	0.007	0.010	0.010	0.033	0.336
2.6E	0.002	0.002	0.004	0.007	0.004	0.004	0.005	0.006	0.003	0.004	0.002	0.002	0.001	0.001	0.001	0.002	0.048
1.0F	0.006	0.003	0.005	0.008	0.008	0.006	0.010	0.018	0.007	0.005	0.005	0.003	0.001	0.004	0.003	0.007	0.100
Total	0.056	0.048	0.061	0.069	0.045	0.063	0.082	0.145	0.077	0.058	0.057	0.062	0.020	0.032	0.033	0.093	1.000

3 OVERVIEW OF GAS FACILITIES IN THE GMGA

3.1 Introduction

Three high-pressure pipelines run through the GMGA. These are:

1. The Moomba-Sydney Ethane (MSE) pipeline, transporting ethane from Moomba in South Australia to Qenos in Port Botany. Flow in this pipeline is one direction only.
2. The Eastern Gas Pipeline (EGP) for transporting natural gas between Longford, Victoria, to Horsley Park, NSW. Predominantly the EGP transports gas from Victoria to NSW, however, it can be configured to flow in the opposite direction. For the purposes of this study, it is assumed flow is towards Sydney, as there is no major natural gas supply to the EGP north of the GMGA.
3. The Jemena Central Trunk Main (CTM). Not classified as a transmission pipeline, the CTM makes up part of the Jemena Gas Network servicing Sydney. The direction of flow in the CTM is based on supply and demand at various times. It is assumed for the purpose of the study that flow is towards Sydney. This is based on a review of publicly available information about gas supply and offtake from the CTM. The CTM feeds lower pressure parts of the gas network. The lower pressure segments of the gas network are typical of gas networks in urban areas and are not within the study scope.

Jemena and the APA Group provided relevant data for the pipeline (Refer to Section 3.2) and the risk at the proposed development from these pipelines was assessed against the risk criteria in HIPAP No. 10 (Refer to Section 8).


The route of the various pipelines is shown in Figure 8. Also shown in this picture is the segment of pipeline considered in the societal risk analysis.

Both the MSE and CTM enter the GMGA land release area from the Southwest, travelling Northeast until Appin, where they turn to the north, and continue to Gilead, where they divert to the Northwest and exit the GMGA land release area by crossing the Hume Motorway to the west.

The EGP enters the GMGA land release area from the south and continues north until it reaches the CTM and MSE travelling in a north-easterly direction. The EGP takes a north-easterly direction at this point before crossing both the CTM and MSE and turning north with the other two pipelines and continuing alongside those pipelines until after Gilead. Prior to the Menangle Park MLV, the EGP crosses the two other pipelines to exit the north of the GMGA land release area by running adjacent and to east of the Hume Motorway.

In addition to the three pipelines and gas network assets, AGL operate the Camden Gas Project, which includes the Rosalind Park Gas Plant in Menangle. In February 2016, AGL announced that it will progressively decommission wells and rehabilitate sites at the Camden Gas Project prior to ceasing production in 2023. As such, the Rosalind Park has been excluded from this study.

Figure 8 Routes of High Pressure Pipelines in the GMGA Land Release Area

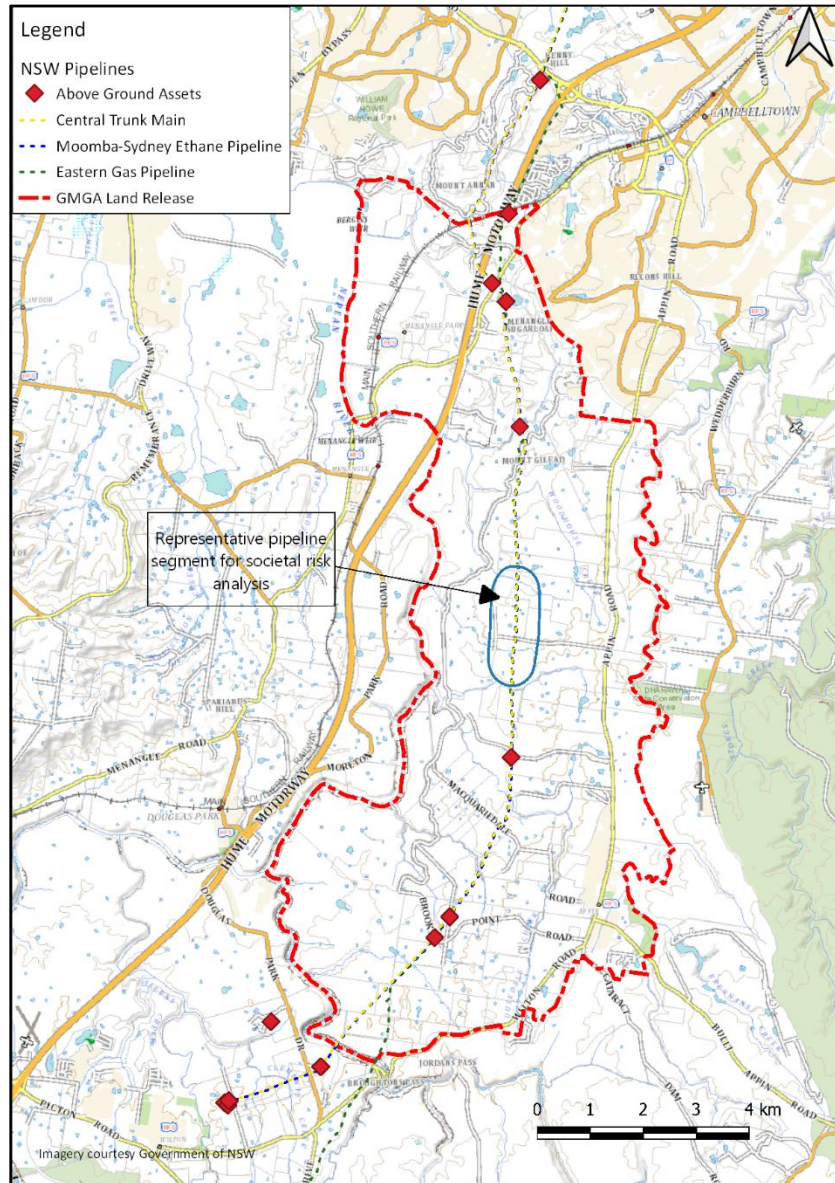

3.2 Moomba to Sydney Ethane Pipeline

Information provided by the pipeline owner (APA) for the Ethane Pipeline is listed in Table 5 [6].

Table 5 Ethane Pipeline

Pipeline Owner	Gorodok Pty Ltd (part of APA Group)
Pipeline Name	Moomba to Sydney Ethane Pipeline
Material/Product Transferred	Ethane (liquefied)
Licence No.	Area of this development is only NSW. SA Licence No 7, Queensland Licence No 21, and New South Wales Licence No 15.
MAOP	10,000 kPa
Normal Operating Pressure	8,200 kPa
Operating Temperature	Typical approx. 20°C

Flowrate	Typical approx. 30 tonne per hour
Pipeline Material	API -5L grade X60
Pipeline Diameter	200mm NB
Wall Thickness	8.1 mm
Depth of Cover	>1200 mm
Cathodic Protection	Impressed Current Cathodic Protection applied
External Coating	HDPE (Yellowjacket)
Leak Detection	No . Loss of pressure detected at ALBVs (see below)
Locations of Automatic Line Break Valves (ALBVs)	Wilton (Southwest of GMGA), Menangle Park (in the Northeast of the GMGA), and Raby Road, Catherine Fields (North of the GMGA land release area)
Leak Detection Time	Line valves within the GMGA have Automatic Line Break systems (ALB) in place and each mainline valve would close the valve when the local pressure falls below the set pressure (approximately 4300 kPa). Local APA staff response time is estimated as 2 hrs from detection.
Leak Isolation Time	The pipeline section is isolated either automatically by ALB operation or by local staff.
Inspections	Ground Patrol Daily (Monday to Friday). Aerial Patrol Fortnightly.
Control Measures for 3rd Party Interference	8.1mm pipe wall thickness. > 1.2m depth of cover. 25mm Concrete Coating of pipeline (Rockjacket). Top slabbing (except through the riparian corridor area). Section of pipeline located within a Riparian Corridor (restricted access for excavation activities). Marker Posts. Dial before-you-dig (DBYD) provisions. Patrols Aerial patrol fortnightly. Daily ground patrol. Liaison with Councils, telecommunications companies, Electricity companies. Section of pipeline located within a Riparian Corridor (restricted access for excavation activities).
Pigging	Metal Loss intelligent pigging carried out on a risk basis program but is undertaken at 5 yearly presently
Current Condition of Pipeline	No wall thickness loss has been found in this section of pipeline

3.3 Natural Gas Pipelines

Information for the HP natural gas pipelines is listed in Table 6 [7].

Table 6 Natural Gas Pipelines

	Jemena Central Trunk Main (CTM)	Jemena Eastern Gas Pipeline (EGP)
Pipeline Owner	Jemena	Jemena
Pipeline Name	Central trunk: Wilton to Horsley Park	Eastern Gas Pipeline
Material/Product Transferred	Natural Gas	Natural Gas
Licence No.	Licence 1	PL 26
MAOP	6.895 MPa	14.895MPa
Normal Operating Pressure	4.5 – 5 MPa	14.895 MPa
Operating Temperature	15°C	15°C
Flowrate	NA	NA
Pipeline Material	API5LX65	Carbon Steel API 5LX 70
Pipeline Diameter	DN850	DN450
Wall Thickness	13.3 mm	11.8 mm
Depth of Cover	1200 mm	900 mm
Cathodic Protection	Impressed current	Impressed current
External Coating	Coal Tar Enamel	Fusion Bonded Epoxy
Leak Detection	None – but ALBVs located at Raby Road, Menangle Park and	NA
Locations of Nearest Isolation Valves	Catherine Fields ALBV (Raby Rd, North of the GMGA land release area), Menangle Park ALBV (in the Northwestern part of the GMGA land release area), Wilton (Southwest of the GMGA).	Main Line Valves (MLVs) located at Raby Road, Menangle Park (Northern part of GMGA land release area), Appin (Southern part of GMGA land release area), and O’Brien’s Gap, near Wollongong outside the GMGA. Line pack is monitored by SCADA and MLVs may be closed remotely.
Leak Detection Time	NA	NA
Leak Isolation Time	NA	NA
Inspections	Weekly	Weekly, six weekly, annually
Control Measures for 3rd Party Interference	DOC, Wall thickness, Warning Signage, DBYD, patrols	DBYD, pipeline patrols
Pigging	Yes 2014, every 10 years	ILI every 10 years or as required

4 RISK ASSESSMENT METHODOLOGY


4.1 Introduction

This analysis involves the quantitative estimation of the consequences and likelihood of accidents (viz. a Quantitative Risk Assessment or QRA). For consequences to people, the most common risk measure is ‘individual fatality risk’ (viz. The likelihood of fatality per year).

In developing the estimates for use in a QRA, it is important to ensure that any estimates fall on the side of conservatism, particularly where there is uncertainty in the underlying data and assumptions. This precautionary approach uses ‘cautious best estimate’ values, which, whilst conservative, are still realistic. This approach is consistent with the DPIE’s guidelines for undertaking this type of assessment [1].

Diagrammatically, the QRA process is as follows:

Figure 9 Overview of QRA Process [1]

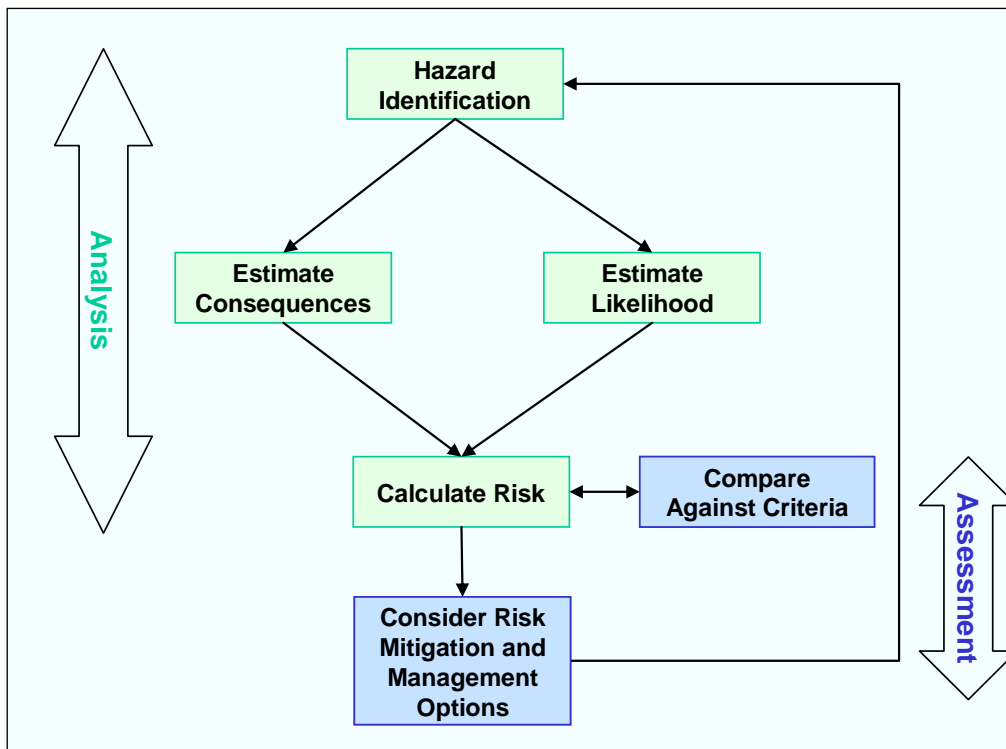

4.2 Methodology Overview

4.2.1 Hazard Identification and Register of Major Accident Events

A hazard is something with the potential to cause harm (e.g. thermal radiation from a fire, physical impact from a moving vehicle or dropped object, exposure to stored energy, etc.). As well as identifying the hazards that exist, it is also important to identify how these hazards could be realised.

For example, the Hazard identification (or HAZID) step for a QRA of a potentially hazardous pipeline would identify representative events that could result in a release of the material from the pipeline with the potential to cause harm (e.g. due to a subsequent ignition and fire/explosion). The representative potentially hazardous events are commonly described as ‘Major Accident Events’ (or MAEs). In the context of the QRA, an MAE is an event with the potential to cause: off-site fatality or injury; off-site property damage; or, long-term damage to the biophysical environment (i.e. any outcome for which DPIE has defined an acceptable risk criterion – Refer to Section 4.4).

There is no single definitive method for hazard identification (HAZID); however, it should be comprehensive and systematic to ensure critical hazards are not excluded from further analysis.

When identifying hazards for modelling in a QRA, it is necessary to capture the following information, either during the hazard identification process, or as part of the preparation for hazard consequence modelling:

- Hazardous materials and material properties;
- Inventory of hazardous materials that could contribute to the accident;
- How the material is released (e.g. hole in a pipeline);
- The condition of the material prior to release (e.g. compressed gas at a specific temperature and pressure);
- The area/s into which the material is released (e.g. inside an enclosed area, etc.);
- Ambient conditions in the area where the material is released (e.g. air temperature, wind speed and direction, atmospheric stability);
- Locations of ignition sources around the release point; and
- Duration of release before it is isolated.

The above information was used to develop a detailed list of MAEs for the risk assessment. This QRA includes an estimate of the consequences and likelihood of each of these scenarios and aggregates the results to estimate the total risk.

4.2.2 Hazard Consequence Analysis

The physical consequences of a release of potentially hazardous material (e.g. flammable gas, flammable liquid, etc.) are generally dependent on:

- the quantity released;
- the rate of release; and,
- for fire and explosion events when ignition occurs.

The quantity of release depends on the inventory, size of release (viz. assumed equivalent hole diameter) and duration of release (how soon can the release be detected and isolated).

Meteorological conditions, such as wind speed, wind direction and weather stability class have an impact on the extent of the downwind and crosswind dispersion. Location-specific meteorological data is therefore required to undertake a QRA study. The representative wind directions, wind speeds and wind stability classes are normally determined from annual average of weather data available from the Bureau of Meteorology, for the local weather station.

In addition to wind speed, the Pasquill stability class has a significant impact on the vertical and crosswind dispersion of a released gas. Six wind stability classes (A to F) are normally used. Class A refers to more turbulent unstable conditions and Class F refers to more stable (inversion) conditions. Although the probability distribution of Pasquill stability classes is site-specific, it is generally observed that Class F conditions are more likely to occur during the night-time while Class D (neutral) conditions occur during the daytime (sunny conditions).

The wind direction, wind speed and stability class distribution used for the QRA is presented in Appendix A (Assumption No. 3).

The latest SAFETI software package was used for all consequence modelling and the generation of the risk contours and societal risk curves.

4.2.3 Impairment Criteria

Impairment criteria have been developed for the effects of explosions and fires as outlined below. The impairment criteria adopted for the QRA are included in Appendix A (Section A.6).

Explosion

During a flash fire, acceleration of the flame front can occur due to the turbulence generated by obstacles within in the combusting vapour cloud. When this occurs, an overpressure ('shock') wave is generated which has the potential to damage equipment and/or injure personnel.

The impact of explosion overpressure on humans takes two forms:

- For a person in the open, there could be organ damage (e.g. ear drum rupture or lung rupture), that may be considered to constitute serious harm.
- The person could be hit a flying missile, caused by the explosion, and this can lead to serious injury or even fatality.

The effects of exposure to explosion overpressure are summarised in Table 7 [1].

Table 7 Effects of Explosion Overpressure

Overpressure [kPa]	Effect/s
0.3	Loud noise.
1.0	Threshold for breakage of glass.
4.0	Minimal effect in the open. Minor injury from window breakage in building.
7.0	Glass fragments fly with enough force to cause injury. Probability of injury is 10%. No fatality. Damage to internal partitions and joinery of conventional buildings, but can be repaired.
14.0	1% chance of ear drum rupture. House uninhabitable and badly cracked.
21.0	10% chance of ear drum rupture. 20% chance of fatality for a person within a conventional building. Reinforced structures distort. Storage tanks fail.
35.0	50% chance of fatality for a person within a conventional building and 15% chance of fatality for a person in the open. House uninhabitable. Heavy machinery damaged. Significant damage to plant.
70.0	100% chance of fatality for a person within a building or in the open. 100% loss of plant.

Fire

The potential for injury or property damage from a fire is determined by the intensity of the heat radiation emitted by the fire and the duration of exposure to this heat radiation.

The effects of exposure to thermal radiation are summarised in Table 8 [1]. The vulnerability criteria used in the risk analysis are included in Appendix A.6.

Table 8 Effects of Thermal Radiation

Heat Radiation [kW/m ²]	Effect/s
1.2	Received from sun in summer at noon.
1.6	Minimum necessary to be felt as pain.
4.7	Pain in 15 to 20 seconds, 1st degree burns in 30 seconds. Injury (second degree burns) to person who cannot escape or seek shelter after 30s exposure.
12.6	High chance of injury. 30% chance of fatality for extended exposure. Melting of plastics (cable insulation). Causes the temperature of wood to rise to a point where it can be ignited by a naked flame after long exposure. Thin steel with insulation on the side away from the fire may reach a thermal stress level high enough to cause structural failure.
23.0	Fatality on continuous exposure. 10% chance of fatality on instantaneous exposure. Spontaneous ignition of wood after long exposure. Unprotected steel will reach thermal stress temperatures, which can cause failure. Pressure vessel needs to be relieved or failure would occur.
35.0	25% chance of fatality on instantaneous exposure.
60.0	Fatality on instantaneous exposure.

The dominant effect in a flash fire is direct engulfment by flame within the combusting cloud. To estimate the magnitude of the flammable gas cloud, the furthest distance from the release location with a concentration equal or above the lower flammability limit (LFL) is estimated using a dispersion model.

4.2.4 Frequency and Likelihood Analysis

Once the consequences of the various accident scenarios have been estimated, it is necessary to estimate the likelihood of each scenario. In a QRA, the likelihood must be estimated in quantitative terms (i.e. occurrences per year). Exponential notation (e.g. 5.0×10^{-6} per year or 5E-06 per year) is normally used because the likelihood of a MAE is usually a low number (i.e. less than 1 chance in 1000 to 10000 per year).

The likelihood of each scenario is normally estimated from historical incident and failure data. This is only possible because data on such incidents and failures has been collected by various organisations over a number of years. Various databases and reference documents are now available that provide this data.

When using historical data to forecast the likelihood of a future event, it is important to ensure any specific conditions that existed at the time of the historical event are taken into account. For very low frequency events (i.e. where historical occurrences are very rare), it might not be possible to estimate the likelihood values directly from the historical data and other techniques such as fault tree analysis may be required.

The frequency analysis data and results are summarised in Section 7 and Appendix C.1.

4.2.5 Risk Analysis and Assessment

Risk analysis and assessment are separate tasks although they are often undertaken together. Risk analysis involves combining the consequence and likelihood estimates for each scenario and then summing the results across all the accident scenarios to generate a complete picture of the risk. The risk assessment step involves comparing the risk results against risk criteria.

Location-specific individual risk (LSIR) contours are usually used to represent off-site risk for a land-use safety QRA study. These iso-risk contours are superimposed on a plan view drawing of the site. Example risk levels that are typically shown as iso-risk contours include: 1×10^{-6} per year, 10×10^{-6} per year and 50×10^{-6} per year.

The iso-risk contours show the estimated frequency of an event causing a specified level of harm at a specified location, regardless of whether or not anyone is present at that location to suffer that harm. Thus, individual iso-risk contour maps are generated by calculating individual risk at every geographic location, assuming a person will be present and unprotected at the given location 100% of the time (i.e. peak individual risk with no allowance for escape or occupancy).

The assessment of risk results involves comparing the results against risk criteria. In some cases, this assessment may be a simple listing of each criterion together with a statement that the criterion is met. In other, more complex cases, the risk criteria may not be met, and additional risk mitigation controls may be required to reduce the risk.

The latest SAFETI software package was used to generate the iso-risk contours / transects and societal risk results (Refer to Section 8).

4.3 Study Assumptions

It is necessary to make technical assumptions during a risk analysis. These assumptions typically relate to specific data inputs (e.g. material properties, equipment failure rates, etc.) and modelling assumptions (e.g. release orientations, impairment criteria, etc.).

To comply with the general principles outlined in Section 2.2 of HIPAP No. 6 [1], all steps taken in the risk analysis should be: *“traceable and the information gathered as part of the analysis should be well documented to permit an adequate technical review of the work to ensure reproducibility, understanding of the assumptions made and valid interpretation of the results”*. Therefore, details of the key assumptions adopted for the risk analysis are provided in Appendix A.

4.4 Quantitative Risk Criteria

4.4.1 Individual Fatality Risk

The individual fatality risk imposed by a proposed (or existing) industrial activity should be low relative to the background risk. This forms the basis for the following individual fatality risk criteria adopted by the NSW DPIE [2] and [8].

Table 9 Individual Fatality Risk Criteria

Land Use	Risk Criterion [per million per year]
Hospitals, schools, childcare facilities and old age housing developments	0.5
Residential developments and places of continuous occupancy, such as hotels and tourist resorts	1
Commercial developments, including offices, retail centres, warehouses with showrooms, restaurants, and entertainment centres	5

Land Use	Risk Criterion [per million per year]
Sporting complexes and active open space areas	10
Industrial sites	50 *

* HIPAP 4 allows flexibility in the interpretation of this criterion. For example, ‘where an industrial site involves only the occasional presence of people, such as in the case of a tank farm, a higher level of risk may be acceptable’.

The DPIE has adopted a fatality risk criterion of 1×10^{-6} per year (or 1 chance of fatality per million per year) for residential area exposure because this risk is very low in relation to typical background risks for individuals in NSW. For sensitive land uses such as schools, the criterion is one-half that for residential area, viz. 0.5×10^{-6} pe year.

4.4.2 Injury Risk

The DPIE has adopted risk criteria for levels of effects that may cause injury to people but will not necessarily cause fatality. Criteria are included in HIPAP No. 4 [8] for potential injury caused by exposure to heat radiation, explosion overpressure and toxic gas/ smoke/dust.

The DPIE’s suggested injury risk criterion for heat radiation is as follows:

- *Incident heat flux radiation at residential and sensitive use areas should not exceed 4.7 kW/m² at a frequency of more than 50 chances in a million per year.*

The DPIE’s suggested injury/damage risk criterion for explosion overpressure is as follows:

- *Incident explosion overpressure at residential and sensitive use areas should not exceed 7 kPa at frequencies of more than 50 chances in a million per year.*

The DPIE’s suggested injury risk criteria for toxic gas/ smoke/dust exposure are as follows:

- *Toxic concentrations in residential and sensitive use areas should not exceed a level which would be seriously injurious to sensitive members of the community following a relatively short period of exposure at a maximum frequency of 10 in a million per year.*
- *Toxic concentrations in residential and sensitive use areas should not cause irritation to eyes or throat, coughing or other acute physiological responses in sensitive members of the community over a maximum frequency of 50 in a million per year.*

4.4.3 Risk of Property Damage and Accident Propagation

Heat radiation exceeding 23 kW/m² may cause unprotected steel to suffer thermal stress that may cause structural damage and an explosion overpressure of 14 kPa can cause damage to piping and low-pressure equipment. The DPIE’s criteria for risk of damage to property and accident propagation are as follows [8]:

- *Incident heat flux radiation at neighbouring potentially hazardous installations or at land zoned to accommodate such installations should not exceed a risk of 50 in a million per year for the 23 kW/m² heat flux level.*
- *Incident explosion overpressure at neighbouring potentially hazardous installations, at land zoned to accommodate such installations or at nearest public buildings should not exceed a risk of 50 in a million per year for the 14 kPa explosion overpressure level.*

4.4.4 Societal Risk

It is possible that an incident at a hazardous facility may affect more than a single individual off-site, especially in the case of a full-bore rupture of a high pressure gas pipeline, and the potential exists for multiple fatalities.

The societal risk concept evolved from the concept of ‘risk aversion’, i.e. society is prepared to tolerate incidents that cause single fatalities at a more frequent interval (e.g. motor vehicle accidents) than for incidents causing multiple fatalities (e.g. an aircraft accident).


Two parameters are required to define societal risk: (a) Number of fatalities that may result from an incident; and (b) the frequency (likelihood) of occurrence of the incident.

Societal risk can be represented by F-N curves, which are plots of the cumulative frequency (F) of various accident scenarios against the number (N) of casualties associated with the modelled incidents. In other words, ‘F’ represents the frequency of exceedance of number of fatalities, N.

The F-N plot is cumulative in the sense that, for each frequency on the plot, N is the number of fatalities that could be equalled **or exceeded**, and F is the frequency of exceedance of the specified number of fatalities.

The DPIE’s suggested societal risk criteria (Refer to Figure 10), recognise that society is particularly intolerant of accidents, which though infrequent, have a potential to create multiple fatalities. Below the negligible line, provided other individual criteria are met, societal risk is not considered significant. Above the intolerable level, an activity is considered undesirable, even if individual risk criteria are met. Within the ‘As Low As Reasonably Practicable’ (ALARP) region, the emphasis is on reducing risks as far as possible towards the negligible line. Provided other quantitative and qualitative criteria of HIPAP 4 [8] are met, the risks from the activity would be considered tolerable in the ALARP region.

Figure 10 Indicative Societal Risk Criteria

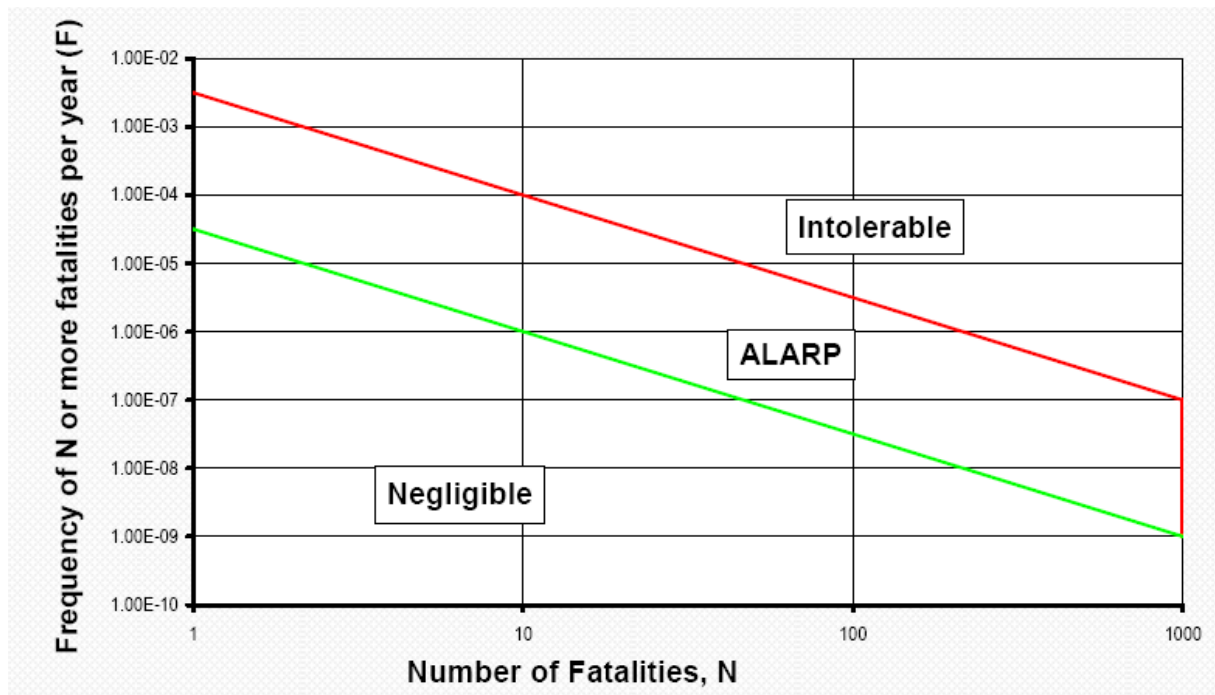

The F-N criterion in NSW imposes an absolute upper limit of N=1000 (i.e. an incident that could cause more than 1000 fatalities is not tolerable), regardless of how low the frequency is.

HIPAP No.4 [8] also states that the criteria in Figure 10 are an indicative criteria and provisional only and do not represent a firm requirement in NSW.

4.5 Qualitative Risk Criteria

Irrespective of the numerical value of any risk criteria for risk assessment purposes, it is essential that certain qualitative principles be adopted concerning the land use safety acceptability of a proposed development or existing activity. The qualitative risk criteria outlined in HIPAP No. 4 [8] encompass the following general principles:

- Avoidance of all 'avoidable' risks;
- Reduction, wherever practicable, of the risk from a major hazard, even where the likelihood of exposure is low;
- Containment, wherever possible, within the site boundary of the effects (consequences) of the more likely hazardous events; and,
- Recognition that if the risk from an existing installation is already high, further development should not be permitted if it significantly increases that existing risk.

4.6 Approach to Achieving Study Objectives

To provide the Department with sufficient risk-based land use safety information to understand the extent and magnitude of the potential risks from HP pipelines to the surrounding land uses in the GMGA, and develop suitable approaches to development in recognition of those risks, the following approach has been taken:

1. Generate individual risk contours of representative sections of pipeline to identify any restrictions on land use based upon the individual risk criteria.
2. Using the results of step 1, postulate appropriate land uses and population densities surrounding the pipelines to generate societal risk results and compare against the DPIE criteria.
3. If necessary, adjust assumptions of land use and population density to satisfy the individual risk and societal risk criteria.

5 HAZARD IDENTIFICATION

5.1 Introduction

The hazard identification was based on a review of the: information on the Ethane and Natural Gas pipelines (Refer to Section 3.2); properties of Ethane and Natural Gas; and, potential failure modes and consequences if a leak were to occur from a pipeline. These findings are presented as follows:

Section 5.2 - Properties of Ethane and Natural Gas.

Section 5.3 - Pipeline Failure Modes.

Section 5.4 - Consequences.

Section 5.5 - Control Measures.

The representative MAEs carried forward to the consequence analysis are listed in Section 5.6.

5.2 Properties of Ethane and Natural Gas

5.2.1 Ethane

Ethane is principally used as a raw material for the manufacture of ethylene. It is modelled as 100% Ethane in the QRA.

Physical properties are listed in Table 10.

Table 10 Physical Properties of Ethane

Boiling Point	-88.6 °C
Autoignition Temperature	515 °C
Relative Density (Air =1)	1.05
Lower Flammability Limit in air (vol. %)	2.4%
Upper Flammability Limit in air (vol. %)	14.3%

Ethane is:

- A gas at ambient conditions;
- Flammable;
- A similar density to air at ambient temperatures; and
- Colourless, odourless and non-toxic.

Ethane is transported by pipeline as a liquefied gas under pressure.

5.2.2 Natural Gas

Natural Gas is principally used as a fuel. It typically contains 95 to 97% methane (CH₄) and is modelled as methane in the risk analysis.

Physical properties are listed in Table 11.

Table 11 Physical Properties of Methane

Boiling Point	-162 °C
Flash Point	-218 °C
Autoignition Temperature	540 °C
Relative Density (Air =1)	0.55
Lower Flammability Limit in air (vol. %)	4.4%
Upper Flammability Limit in air (vol. %)	16.5%

Methane is:

- A gas at ambient conditions;
- A gas at typical operating conditions for Natural Gas pipelines;
- Flammable;
- Lighter than air at ambient temperatures; and
- Colourless, odourless and non-toxic (Note: odorant is added to natural gas to alert people to leaks).

5.3 Pipeline Failure Modes

Pipelines may leak due to various causes. The four principal failure modes that may result in a leak from an underground pipeline include [9]:

- **Mechanical failures**, including material defects or design and construction faults;
- **Corrosion**, including both internal and external corrosion;
- **Ground movement and other failure modes**, including ground movement due to earthquakes, heavy rains/floods or operator error, and other natural hazards such as lightning, etc.; and
- **Third Party Activity (TPA)**, including damage from heavy plant and machinery, damage from drills/boring machines and hot tapping, etc.

The relative likelihood of each failure mode is shown in Appendix C.1 for underground pipelines.

5.3.1 Mechanical Failure

Leaks due to mechanical failures are usually caused by a construction fault, a material fault / defect or design of the pipeline.

This failure mode is credible for the three HP pipelines; however, historical incident data for other pipelines (Refer to Appendix C.1) indicates this is generally a low likelihood failure mode, particularly for more recently manufactured pipelines (i.e. post 1980).

5.3.2 Corrosion

Leaks due to internal corrosion are generally a function of the material being transported, the wall thickness of the pipeline and the materials of construction.

Leaks due to external corrosion do not depend on the material being transported and are generally dependent on the soil type / conditions, pipeline coating and materials of construction, and the age of the pipeline.

This failure mode is credible for the three HP pipelines; however, historical incident data for other pipelines (Refer to Appendix C.1) indicates this is a low likelihood failure mode, particularly for pipelines with a higher wall thickness (i.e. > 10 mm) and more recently manufactured pipelines (i.e. post 1980).

5.3.3 Ground Movement and Other Failure Modes

Pipeline leaks may occur due to ground movement (e.g. following a landslide or earthquake). The potential also exists for ground movement in the vicinity of water crossings (water erosion) or as a result of construction activities (new road infrastructure and buildings). Notably, both the South Campbelltown and Appin mine subsidence districts are within the GMGA land release area. For this reason, no adjustment has been made to ground movement failure frequencies.

Other external events, such as lightning strikes, operational errors and erosion may also lead to a leak.

5.3.4 Third Party Activity

Most leaks due to Third Party Activity (TPA) are caused by construction vehicles and equipment (drills, etc.) or by farm machinery in rural areas. The leak typically occurs immediately upon contact; however, it may be delayed (i.e. if the TPA only weakens the pipeline such that it fails at a later time).

Leaks due to TPA include those caused by horizontal directional drilling (HDD), which is commonly used to install utilities and services (communication cables, etc.).

Leaks due to TPA are particularly relevant when considering development in the vicinity of existing pipelines due to the potential for significant construction activities (e.g. new road infrastructure and buildings).

This failure mode is credible for the three HP pipelines.

5.4 Consequences of Gas Release

5.4.1 Asphyxiation

Although non-toxic, Ethane and Methane have the potential to cause asphyxiation at higher concentrations due to oxygen depletion, particularly if exposure occurs in a confined space.

Methane and Ethane are simple asphyxiants with low toxicity to humans. If a release does not ignite, then the potential exists for the gas concentration to be high enough to present an asphyxiation hazard to individuals nearby.

An atmosphere with marginally less than 21% oxygen can be breathed without noticeable effects. However, at 19.5% (which is OSHA's lower limit for confined space entry in 29 CFR 1915.12 [10]) there is a rapid onset of impairment of mental activity.

An oxygen concentration of about 15% will result in impaired coordination, perception and judgment. This may prevent a person from performing self-rescue from a confined space.

The potential for unconsciousness and fatality is only significant at less than 10% oxygen. However, to reduce the oxygen concentration to 10% requires a relatively high concentration (viz.

approximately 52% v/v, which equates to 641,000 mg/m³ for Ethane and 342,000 mg/m³ for Methane).

Oxygen deficiency from exposure to Ethane or Methane should not be a major issue because the fire hazards are usually the dominant effects in most locations (the LFL for Ethane is approximately one-twentieth, or 5%, of the fatal asphyxiant concentration and the LFL for methane is approximately one-tenth of the fatal asphyxiant concentration). Therefore, the potential for fatality from asphyxiation was not carried forward to the consequence, likelihood and risk estimation steps of the QRA.

5.4.2 Jet Fire

Release of Ethane or Methane released from high pressure through a hole in a pipeline may create a jet plume. The gas plume extends several metres in the direction of discharge due to its momentum jet effect, entraining air. Ignition would result in a jet fire.

The potential for fatality due to exposure to heat radiation from a jet fire (including direct exposure to the jet) was included in the QRA.

5.4.3 Flash Fire

Ignition of an unconfined gas or vapour cloud will usually progress at low flame front velocities and will not generate a significant explosion overpressure. Unobstructed combustion of the gas cloud is referred to as a flash fire, which has the potential to cause injuries or fatalities for individuals within the ignited cloud.

A flash fire was included in the QRA as a potential outcome for all the gas releases. The potential for fatality due to direct exposure to a flash fire was included in the QRA.

5.4.4 Vapour Cloud Explosion

A high degree of confinement and congestion is required to produce high flame speeds (i.e. > 100 m/s) in a flammable gas or vapour cloud, due to promotion of turbulence and accelerated combustion. This may occur inside buildings and around obstacles (e.g. buildings, vehicles, trees etc.).

In the case of a gas release from the gas pipelines, a gas cloud explosion is less likely than a flash fire due to the relatively open areas and absence of congestion surrounding the three HP pipelines; however, some built up areas (residences) have been included in the QRA as potential congestion areas sources to model vapour cloud explosion.

5.4.5 Gas Ingress into Buildings

The gas jet would disperse downwind, once the momentum effect is lost. If the wind direction were oriented towards buildings, there is potential for flammable gas to be drawn into the buildings through ventilation air intake, and through open windows. If the gas reaches lower flammability limit, an ignition within the building would result in a confined explosion with serious harm to occupants and structural damage.

5.4.6 Toxic Smoke

Large quantities of smoke can be produced from hydrocarbon fires; however, this is rarely injurious for persons at ground level due to the buoyancy of the hot plume and its subsequent dispersion at heights well above ground level. Ethane and Methane are relatively clean burning fuels and the potential for injury due to smoke exposure was not carried forward to the consequence, likelihood and risk estimation steps of the QRA. The smoke plume would rise above the building roof height.

5.4.7 Incident Escalation in Pipeline Easement

A major fire on one pipeline may result in the failure of an adjacent pipeline. Underground pipelines are typically protected by the surrounding soil but may be exposed if a large release creates a crater.

The potential for propagation and escalation was carried forward in the risk analysis where the distance between pipelines was within the radius of a crater created by a full-bore rupture. This was restricted to the points where the EGP crosses both the MSE and CTM.

5.5 Control Measures

Under the NSW Pipelines Act (1967) and Pipeline Regulations (2013), a pipeline operator must ensure the design, construction, operation and maintenance of a licensed pipeline is in accordance with the relevant provisions of Australian Standard AS 2885 [11] for gas and liquid petroleum pipelines.

A licensee must implement a pipeline management system that relates to the pipeline operated under the licence and is in accordance with the relevant provisions of AS 2885.

5.5.1 Prevention of Mechanical Failure

Operators of licensed pipelines under the NSW Pipelines Regulation 2013 are required to develop and implement systems and processes to ensure the pipeline structural integrity for the design life of the pipeline in accordance with Section 6 of AS 2885.3:2012 [12] as part of the pipeline management system.

Continual monitoring is required while the pipeline is in operation to ensure that pipeline structural integrity is maintained. They shall not be operated above the maximum allowable operating pressure (MAOP). Anomalies should be assessed, and defects repaired.

The three HP pipelines are inspected using 'intelligent pigging' (Refer to Section 3.2) and no loss of wall thickness has been reported [13].

5.5.2 Corrosion Prevention

Operators of licensed pipelines under the NSW Pipelines Regulation 2013 are required to develop and implement systems and processes to ensure the pipeline structural integrity for the design life of the pipeline. (as per Section 6 of AS 2885.3:2012) as part of the pipeline management system. This should include corrosion protection systems.

Two key control measures are typically implemented by pipeline operators to minimise the likelihood of failure due to corrosion: cathodic protection systems and external pipe coatings.

The Moomba to Sydney Ethane Pipeline is inspected using 'intelligent pigging' (Refer to Section 3.2) and has a significant wall thickness (8.1 mm). It is equipped with a cathodic protection system and a double layered HDPE coating (Refer to Section 3.2).

Both the Jemena gas pipelines are cathodically protected (impressed current) and monitored. The CTM has coal tar enamel coating and the EGP has epoxy fusion coating for corrosion protection.

5.5.3 Prevention of Damage due to Ground Movement and Other Failures

Normal loads (e.g. due to the internal and external pressure, weight of soil, traffic loads, etc.) and occasional loads (e.g. due to flood, earthquake, transient pressures in liquid lines and land movement due to other causes) are considered during design of a pipeline (as per AS2885.1:2012). To comply with AS2885.1:2012 [14], additional depth of cover may also be required where the minimum depth of cover cannot be attained because of the action of nature (e.g. soil erosion, scour).

The Campbelltown South and Appin Mining Subsidence Areas are within the GMGA land release area. Ground movement cannot be discounted.

5.5.4 Prevention of Damage due to Third Party Activity

Operators of licensed pipelines under the NSW Pipelines Regulation 2013 are required to undertake a Safety Management Study (as per Section 11 of AS 2885.3:2012) to assess the risks associated with threats to the pipeline and to instigate appropriate measures to manage the identified threats. The safety management study is reported in Ref. [13].

Two key control measures are typically implemented by pipeline operators to minimise the likelihood of impact from TPA: the ‘Dial Before You Dig’ (DBYD) process and daily / weekly patrols.

Statistical data indicates that the pipelines in NSW are 100% cathodically protected with effectiveness between 95 and 100%, and that over 96% of parties contacted DBYD before any excavation work [15].

The probability of leak on impact depends on the pipeline wall thickness. The depth of cover may also reduce the likelihood of impact.

5.5.5 Mitigation Control Measures

Operators of licensed pipelines under the NSW Pipelines Regulation 2013 are required to develop and implement an Emergency Response Plan (as per Section 11 of AS 2885.3:2012) as part of the pipeline management system.

The Emergency Response Plan should detail the response and recovery strategies and procedures to address all pipeline related emergency events, including: loss of containment; full-bore pipeline rupture; fires; and, natural events.

Leaks may be detected during visual inspections, incident notifications and/or by instrumented monitoring systems. If a leak is detected, then the HP pipelines can be isolated by closing automated and/or manual valves (Refer to Section 3.2 for locations of upstream and downstream isolation valves).

5.6 MAEs for Risk Analysis

The list of MAEs included in the risk analysis is provided in Table 12.

Table 12 List of MAEs

MAE	Potential Consequences
Release of High Pressure Ethane from the MSE	Jet Fire, Flash Fire or Explosion
Release of High Pressure Natural Gas (Methane) from the EGP	Jet Fire, Flash Fire or Explosion
Release of High Pressure Natural Gas (Methane) from the CTM	Jet Fire, Flash Fire or Explosion

6 CONSEQUENCE ANALYSIS

6.1 Release of Flammable Liquid / Gas

6.1.1 Representative Hole Diameter

Representative hole diameters were selected for the consequence modelling. These were selected to align with the leak frequency data (Refer to Appendix C.1), which includes four hole size categories: Pinhole (≤ 25 mm); Small Hole (> 25 mm to ≤ 75 mm), Large Hole (> 75 mm to ≤ 110 mm); and, Rupture (> 110 mm). The representative hole diameter/s in each hole size category were selected based on a review of the available historical data (Refer to Appendix B.1):

- Leaks from underground pipelines in the Pinhole size category tend to be larger for TPA incidents (i.e. typically c. 20 mm to 25 mm - Refer to Appendix D) than for the other failure modes (i.e. typically less than c. 10 mm). Therefore, two representative hole diameters were selected in this category: 25 mm for TPA and 10 mm for all other failure modes.
- There is insufficient historical incident data for Ethane to determine the representative hole diameter/s in each hole size category. Therefore, the representative hole diameters were assumed to be the same as proposed by the UK HSE for LPG.

Table 13 Representative Hole Diameters Selected for Consequence Analysis

Pipeline	Internal Diameter (mm)	Representative Hole Diameter (mm)			
		Pinhole (≤ 25 mm)	Small Hole (> 25 mm to ≤ 75 mm)	Large Hole (> 75 mm to ≤ 110 mm)	Rupture (> 110 mm)
MSE	202.9	10 or 25*	75	110	Full bore
EGP	433.6	10 or 25*	75	110	Full bore
CTM	836.8	10 or 25*	75	110	Full bore

* 10 mm for all failure modes except TPA. 25 mm for TPA only.

6.1.2 Rate of Release

Release events were modelled using the ‘Long Pipeline’ model in SAFETI. The estimated release rates are presented in Appendix B.2.

6.1.3 Height and Orientation of Release

The release of high pressure gas or liquefied gas from a buried pipeline would result a crater and gas would be released vertically from the crater [16]. Where above ground assets have been modelled (ALBVs and MLVs), the release has been assumed to be horizontal in the same direction as the wind, from a distance 1m above ground level.

6.1.4 Duration of Release

Methane and ethane are flammable and any adverse impact will occur quickly (fire or explosion); therefore, the duration of exposure is not as critical as it would be if there were a toxic material in the pipelines (i.e. where the adverse impact can significantly increase for longer exposure durations).

The isolation time and duration of release is not specified in the QRA as these will be significantly longer than the period of exposure required for an adverse effect to people (Refer to Section A.6) and the time required for each representative release case to reach steady state.

Duration of release becomes significant only from a fire escalation point and not required for risk assessment based on short duration exposure to fire.

6.2 Fire Modelling

The latest SAFETI software package (Version 8.23) was used to model all the representative fire events included in the risk analysis.

The key data and assumptions used to model the representative fire events are included in Appendix A.4.

6.2.1 Jet Fire

Example distances to heat radiation levels of 4.7, 12.5, 23 and 35 kW/m² are tabulated in Appendix B.1.2 for representative jet fire events included in the risk analysis.

The worst fire case was for a full-bore rupture (FBR) of the CTM, because of its diameter, resulting in a large release rate.

6.2.2 Flash Fire

Example distances to the lower flammability limit (LFL) concentration are tabulated in Appendix B.1.2 for representative flash fire events included in the risk analysis.

6.3 Vapour Cloud Explosion

When a flammable vapour cloud ignites, the flame front advances as the cloud burns. If there are obstacles in the path of the flame front, the level of turbulence increases causing accelerated burning and thus the flame front accelerates, reaching speeds of 100-200 m/s. The whole combustion process occurs over a period of less than a second, but this short burst of high speed flame front results in a blast wave, resulting in a pressure above the atmospheric pressure on the target surface (referred to as blast overpressure).

The blast wave can cause damage to the structure and injury/ fatality to exposed individuals and is commonly called vapour cloud explosion (VCE).

The 3-D obstruction model in SAFETI was used to estimate the overpressure for a VCE. Target points on each of the buildings were selected and the overpressures were estimated for each pipeline scenario. Results are provided in Section B.2.3.

7 FREQUENCY AND LIKELIHOOD ANALYSIS

7.1 Likelihood of Gas Release

The likelihood of a gas release (i.e. leak) from each of the HP pipelines is tabulated in Appendix C.1 and was estimated based on a review of relevant data sources. The primary data sources included:

- Department of Industry, Resources and Energy, New South Wales, *2017-18 Licensed Pipelines Performance Report* [17]. This includes data for all licensed pipelines in NSW for the 5-year period: 2013/14 to 2017/18.
- UK Health and Safety Executive (HSE), Research Report (RR) 1035 [9].
- British Standards Institute (2013) [18].
- US Department of Transportation (DoT) (2018) [19].

7.2 Probability of Ignition

The ignition probabilities adopted in the risk analysis are based on Scenario 3 “Pipe Gas LPG Industrial” described in the International Association of Offshore Oil & Gas Producers Risk Assessment Data Directory – Ignition Probabilities [20] after a review of relevant ignition probability data and ignition probability correlations (Refer to Appendix C.1.3).

7.3 Likelihood of Escalation in Pipeline Easement

For much of the GMGA, all three pipelines are located in the same corridor. If any pipeline falls within the crater created by a rupture of the other, then the second pipeline would be exposed, with a potential for failure.

The likelihood of propagation and escalation was estimated based on a review of historical incidents by Silva et al. [21]. The EGP crosses each of the MSE and CTM in two locations within the GMGA. Estimated crater dimensions from SAFETI and have been used to estimate the likelihood of escalation to a second pipeline. The points at which the EGP crosses other pipelines are the only points where escalation potential has been identified. The potential for escalation where the pipelines run parallel is extremely unlikely as the distance between the pipelines as determined from the pipelines database appears to be greater than the crater dimensions.

7.4 Likelihood of Representative MAEs

The likelihood of each representative release scenario included in the risk analysis is tabulated in Appendix C.2.4.

8 RISK ANALYSIS

8.1 Individual Risk of Fatality

The combined individual risk of fatality contours for a representative segment of the three pipelines in the central part of the GMGA land release area is shown in Figure 11. A more focused view of the pipeline segment for which the societal risk analysis was performed is shown in Figure 12. Both figures demonstrate that all three pipelines combined generate individual risk levels greater than of the risk criteria for sensitive land uses and residential land use as described in HIPAP No.10 [2].

Figure 11: Cumulative LSIR Contours for All three Pipelines Combined


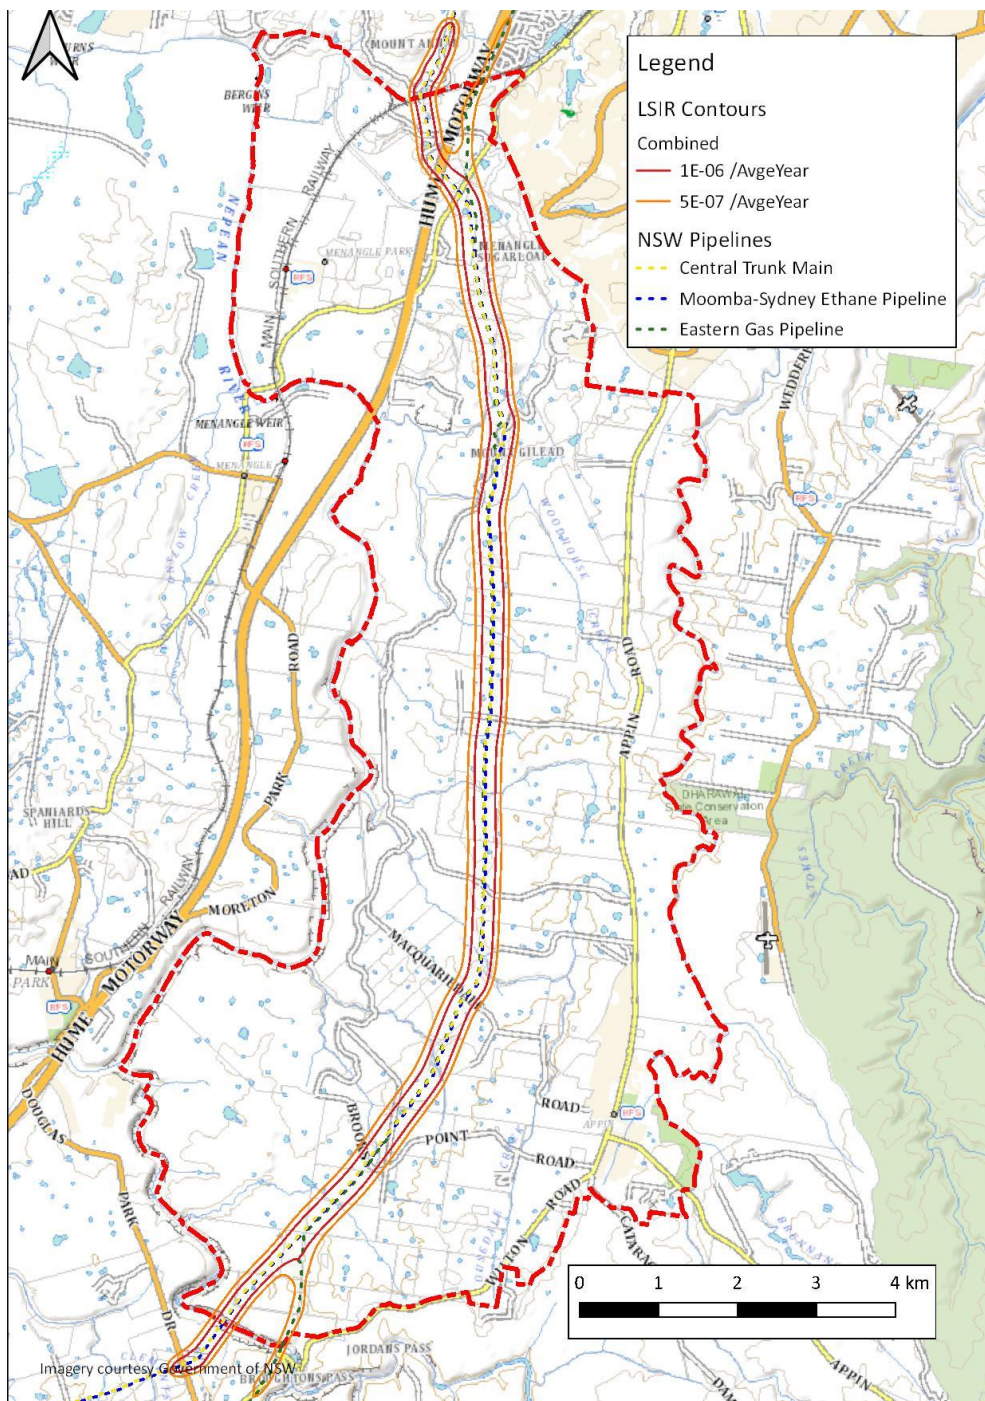


Figure 12 Combined LSIR Contours for MSE, CTM and EGP in the Central Part of the GMGA Land Release Area

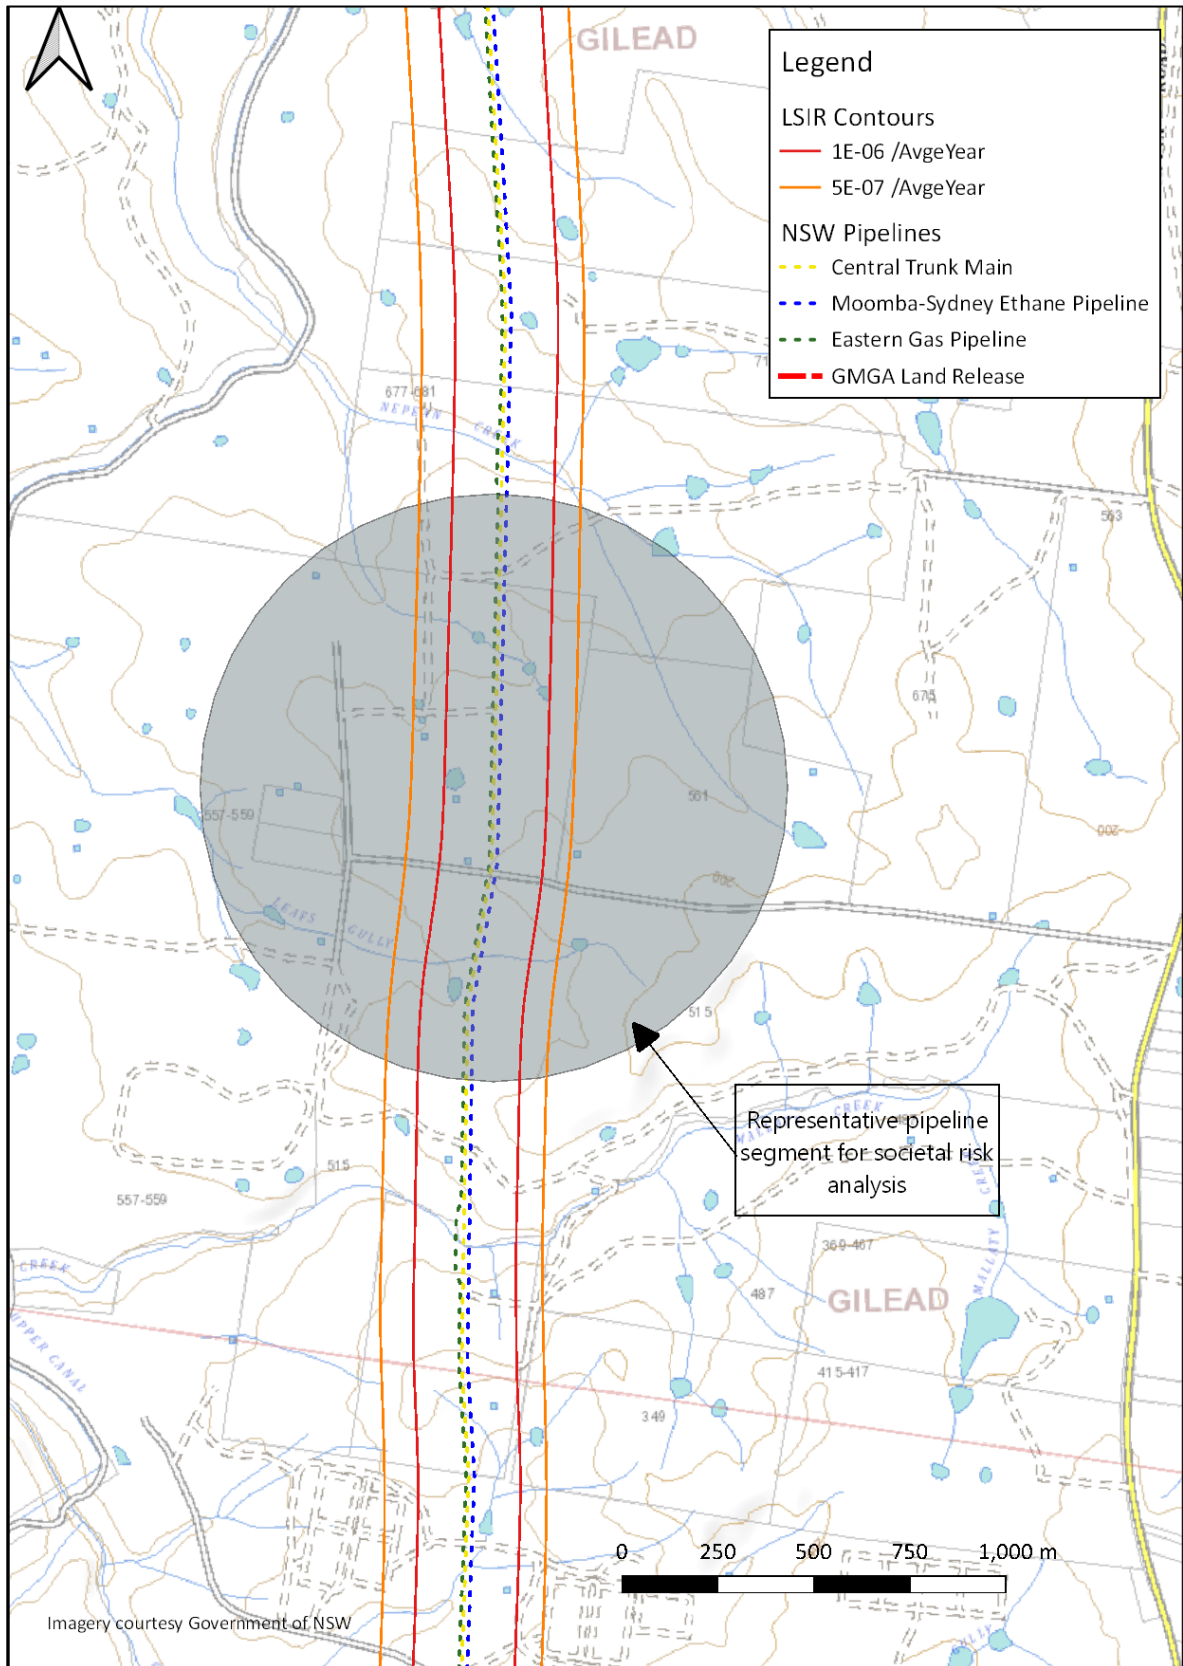

The maximum cumulative individual risk of fatality for the three pipelines combined is less than $3.0E-06$ p.a. This is below the NSW DPIE individual risk criteria for commercial developments, sporting complexes and active open space, and industrial developments.

As an indication of the relative contribution of each of the individual pipelines, individual risk contours for each of the pipelines alone are presented in Figure 13, Figure 14, Figure 15. These figures indicate that:

1. Only the MSE generates a 1.0×10^{-6} p.a. contour for the length of the pipeline. The EGP also generates small 1.0×10^{-6} p.a contours (around 30 m radius) from above ground assets such as MLVs. The EGP has MLVs at MenanglePark and Appin, and a TRAD at the very northern end of the GMGA land release area next to the Hume motorway.
2. As all pipelines have a 0.5×10^{-6} p.a contour, all three combined (and in fact, any two) contribute the extent of the 1.0×10^{-6} p.a contour.
3. The extent of the 0.5×10^{-6} p.a contour is driven by the CTM. This pipeline has the lowest decay of individual risk with distance away from the pipeline centreline.

As the EGP diverges from the path taken by the CTM and MSE in the northern and southern extents of the land release area, the risk profile of the EGP alone, and the combined risk of the MSE and CTM has also been prepared. These are shown in Figure 13 and Figure 14 respectively, which replicate Figure 1 and Figure 2 of the Summary.

For completeness, individual risk contours for sections of the three pipelines combined at the northern extent and southern extent of the land release area are presented in Figure 16 and Figure 17 respectively. As expected, the distance to specified risk levels increases as the pipelines diverge until the pipelines are separated enough to start reducing the cumulative effect of the risk.

Figure 13 LSIR Contours for the EGP in the Central Part of the GMGA Land Release Area

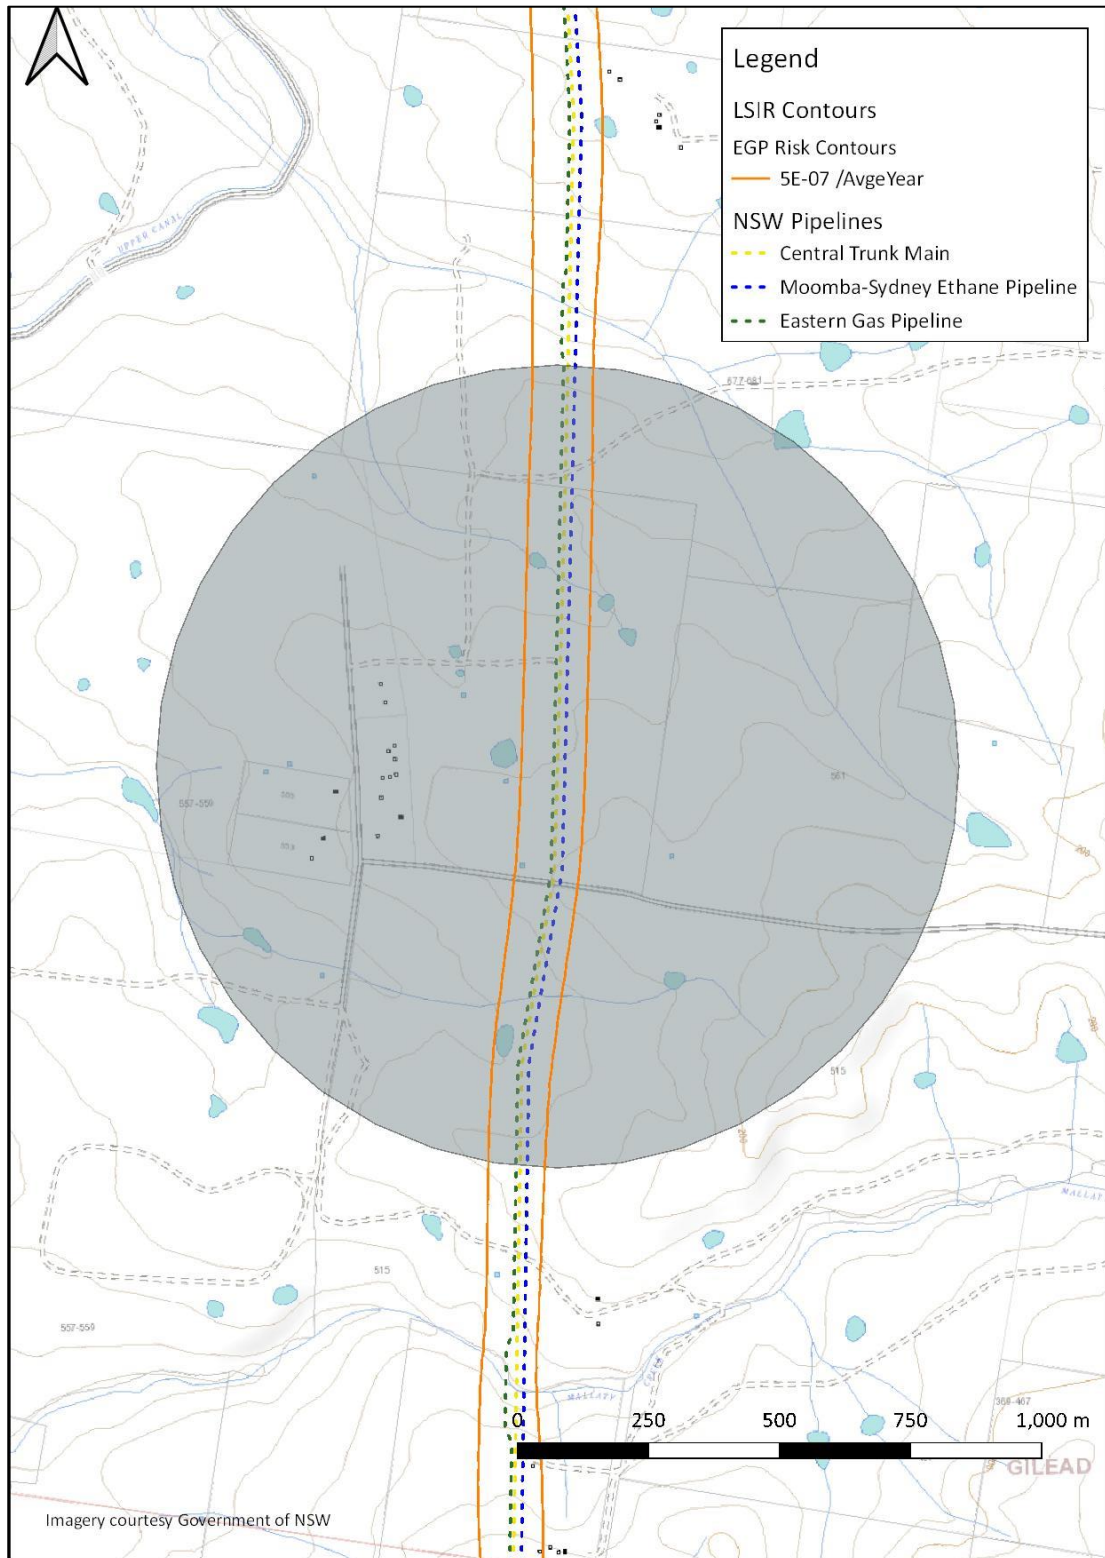


Figure 14 LSIR Contours CTM in the Central Part of the GMGA Land Release Area

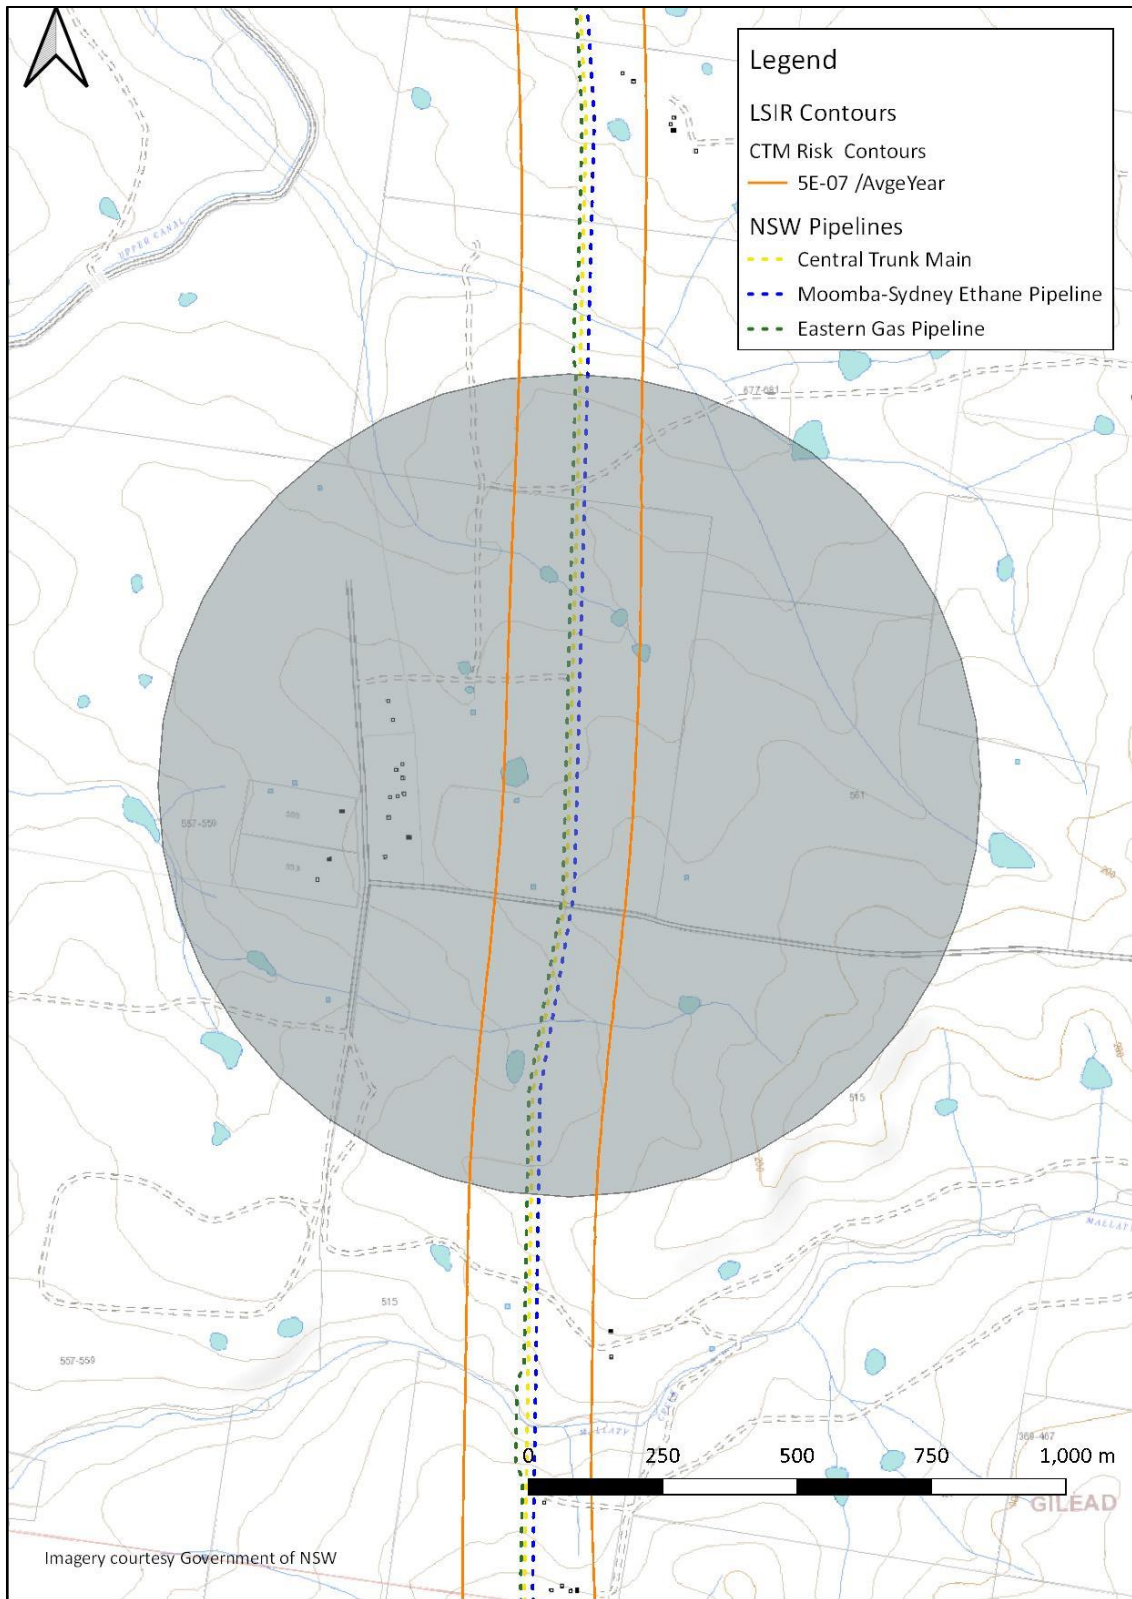


Figure 15: LSIR Contours MSE in the Central Part of the GMGA Land Release Area

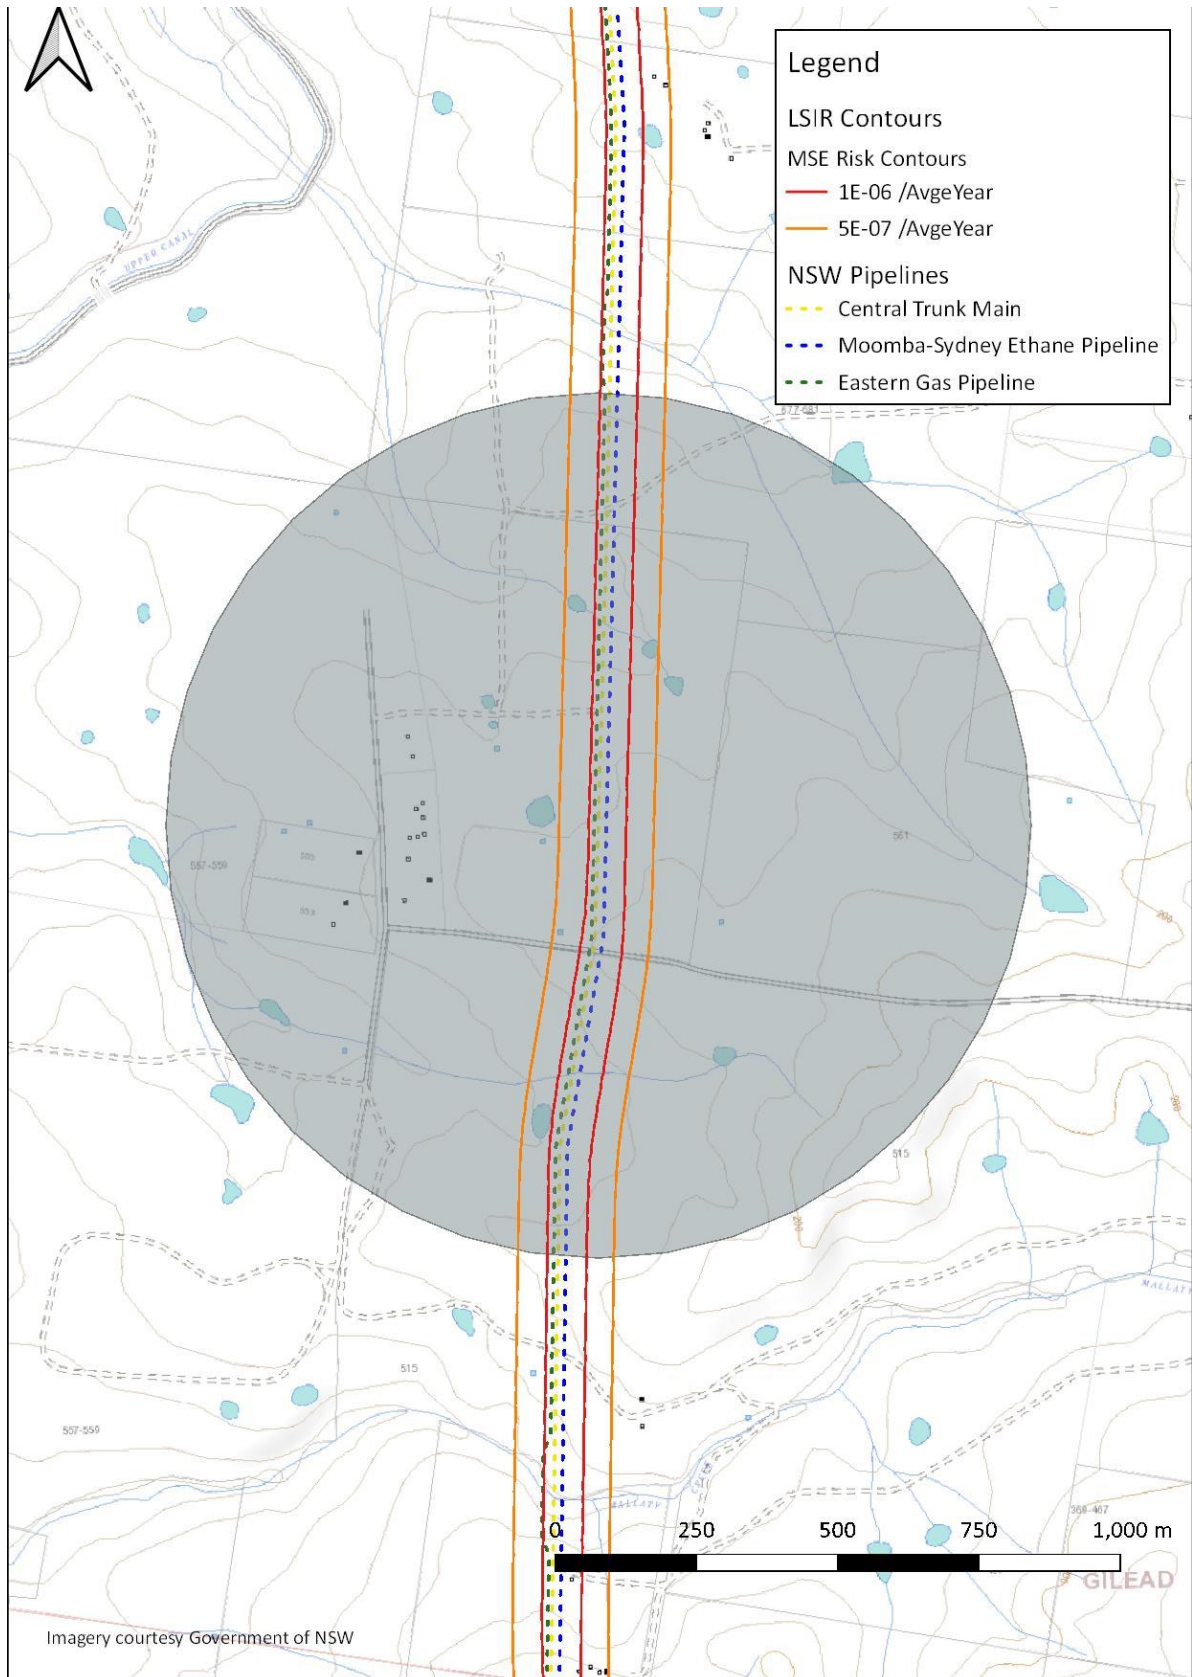


Figure 16 LSIR Contours for MSE, CTM and EGP in the Northern Part of the GMGA Land Release Area


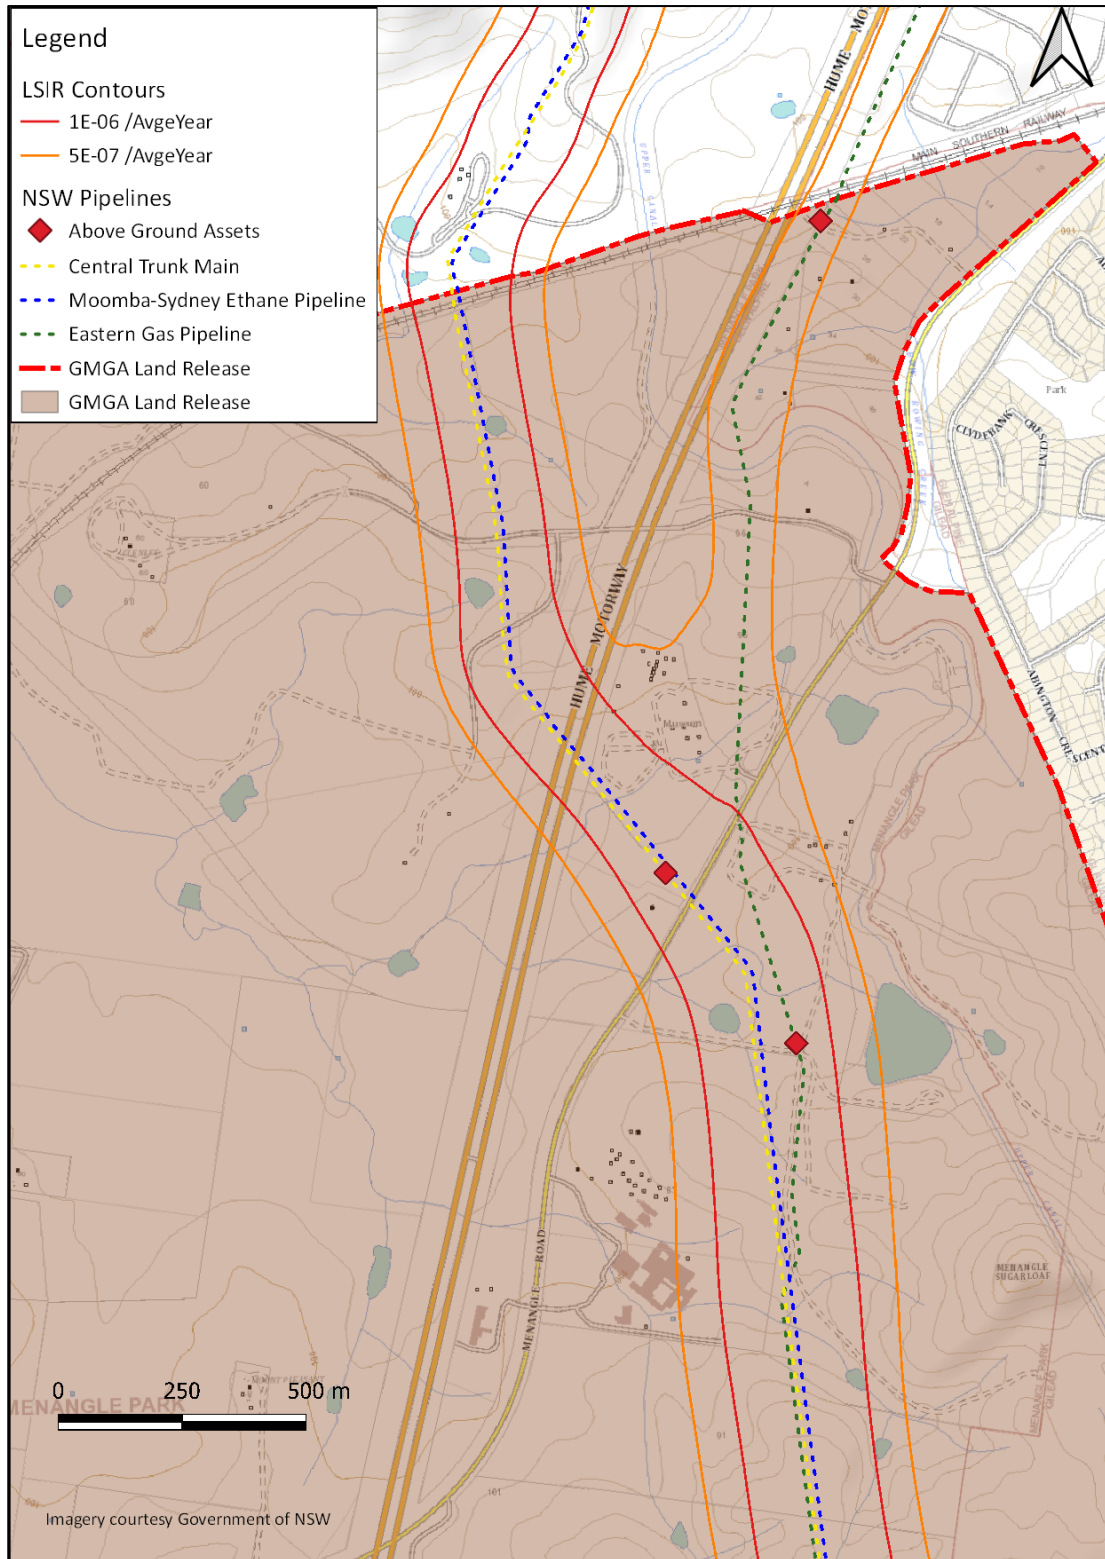


Figure 17 LSIR Contours for MSE, CTM and EGP in the Southern Part of the GMGA Land Release Area

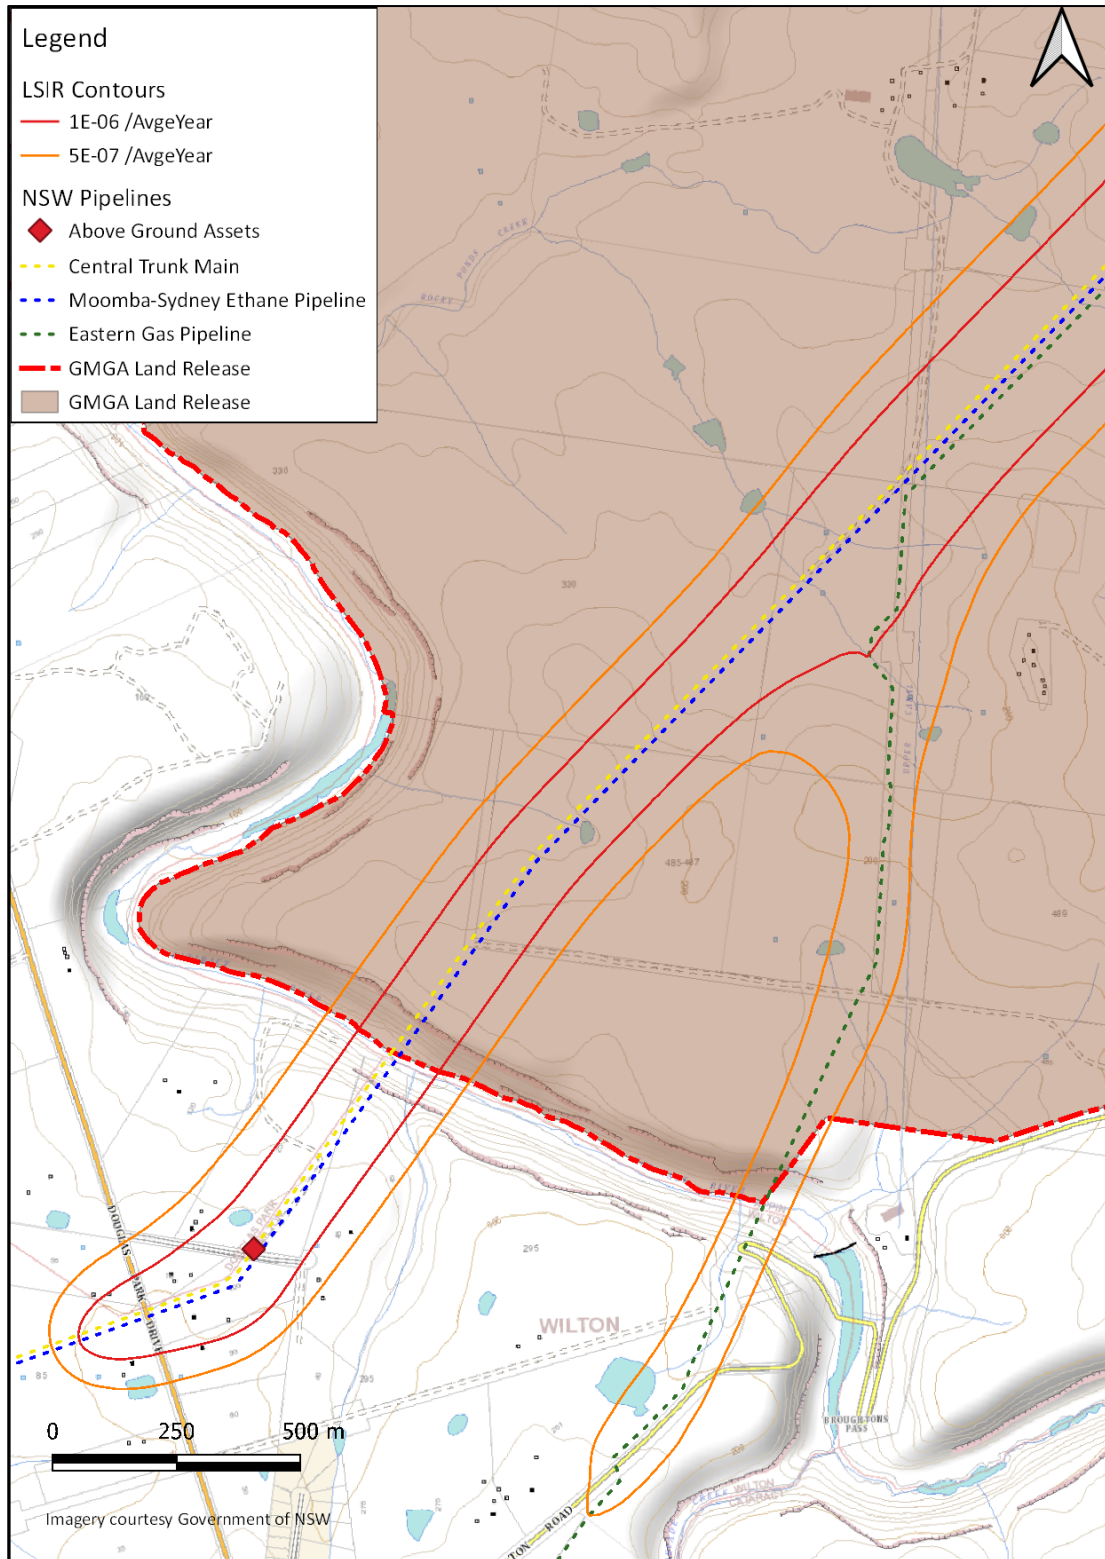

8.2 Risk of Acute Toxic Injury or Irritation

No events with the potential to cause acute toxic injury or irritation were identified for inclusion in the risk analysis (Also refer to Section 5.4.6); therefore any future proposed development will comply with the relevant DPIE toxic injury risk and irritation criteria with respect to the high pressure transmission pipelines (Refer to Section 4.4.2).

8.3 Risk of Property Damage and Accident Propagation (Exceeding 14 kPa)

The cumulative risk of property damage and accident propagation (Overpressure exceeding 14 kPa) does not reach 50×10^{-6} per annum; therefore, any future proposed development will comply with the DPIE property damage and accident propagation criteria with respect to the high pressure transmission pipelines (Refer to Section 4.4.3).

8.4 Risk of Property Damage and Accident Propagation (Exceeding 23 kW/m²)

The cumulative risk of property damage and accident propagation (Heat radiation exceeding 23 kW/m²) does not reach 50×10^{-6} per annum; therefore, any future proposed development will comply with the DPIE property damage and accident propagation criteria with respect to the high pressure transmission pipelines (Refer to Section 4.4.3).

8.5 Risk of Injury (Exceeding 7 kPa)

The cumulative risk of injury (Overpressure exceeding 7 kPa) does not reach 50×10^{-6} per annum; therefore, any future proposed development will comply with the relevant DPIE risk criterion (Refer to Section 4.4.2) with respect to the high pressure gas transmission pipelines.

8.6 Risk of Injury (Exceeding 4.7 kW/m²)

The cumulative risk of injury (Heat radiation exceeding 4.7 kW/m²) does not reach 50×10^{-6} per annum; therefore, any future proposed development will comply with the relevant DPI&E risk criterion (Refer to Section 4.4.2) with respect to the high pressure gas transmission pipelines.

8.7 Qualitative Risk Criteria

Irrespective of the numerical value of any risk criteria level for risk assessment purposes, it is essential that certain qualitative principles be adopted concerning the land use safety acceptability of a proposed development or existing activity. The proposed development is considered to comply with the qualitative risk criteria outlined in HIPAP No. 4, as follows:

- Avoidance of all 'avoidable' risks – The pipelines are existing facilities and cannot be relocated to avoid risk exposure.
- Reduction, wherever practicable, of the risk from a major hazard, even where the likelihood of exposure is low – Some risk reduction measures are discussed in Section 8.9.
- Containment, wherever possible, within the site boundary of the effects (consequences) of the more likely hazardous events – The pipelines carry gases and liquefied gases that will vaporize upon release. Containment is not a practicable solution.
- Recognition that if the risk from an existing installation is already high, further development should not be permitted if it significantly increases that existing risk – This study has identified areas where certain land uses must be avoided to comply with the NSW DPIE risk criteria, and also potential limitations on the intensity of other land uses.

8.8 Societal Risk

Societal risk was analysed for a segment of pipeline indicated in Figure 8. This segment of pipeline is approximately twice the measurement length of the CTM long, and hence every part of the segment could potentially be impacted by another event in the segment. Conducting societal risk for an entire transport route (including pipelines) is problematic, because the societal risk would increase with the length of the route, despite no increase in individual risk transects.


The societal risk analysis assumed residential development up to the proposed maximum density of 45 dwellings per hectare located outside the 1.0×10^{-6} p.a individual risk contour (refer Section 8.1) on either side of the pipeline corridor, supplemented with an infill of the buffer zone with other land uses such as industrial or commercial, populated to the same density of 0.0126 ppl/m², but only occupied for ten hours per day...

In HIPAP 10 [2], the following is reported in regard to the F-N criteria:

If a development proposal involves an intensification of population in the vicinity of a potential source of risk, then the incremental change in societal risk needs to be taken into account, even if individual risk criteria are met [Ref.2, Section 5.5.4]. The incremental societal risk should be compared against the indicative societal risk criteria in Section 5.4.2 of HIPAP No. 10 [Figure 4 below]. If the incremental societal risk lies within the 'Negligible' region, then the development should not be precluded and if it lies within the 'Tolerable if ALARP' region, then options should be considered to relocate people away from the affected areas [Ref.2, Section 5.5.4]. If, after taking this step, there is still a significant portion of the societal risk plot within the 'Tolerable if ALARP' region, the proposed development should only be approved if benefits clearly outweigh the risks [Ref.2, Section 5.5.4].

The results of the societal risk analysis are shown in Figure 18 as an F-N Curve. There are minor excursions of the intolerable line between N=300 and N=500. Given the level of conservatism in the assumptions of population (maximum predicted population density for the entire area in regions where the individual risk criteria is satisfied), the graph reasonably portrays an acceptable level of population and employment density in the GMGA land release area. It was found that the main contributor to exceeding the societal risk is the thermal radiation effects from a full-bore rupture of the CTM.

Figure 18 Societal Risk

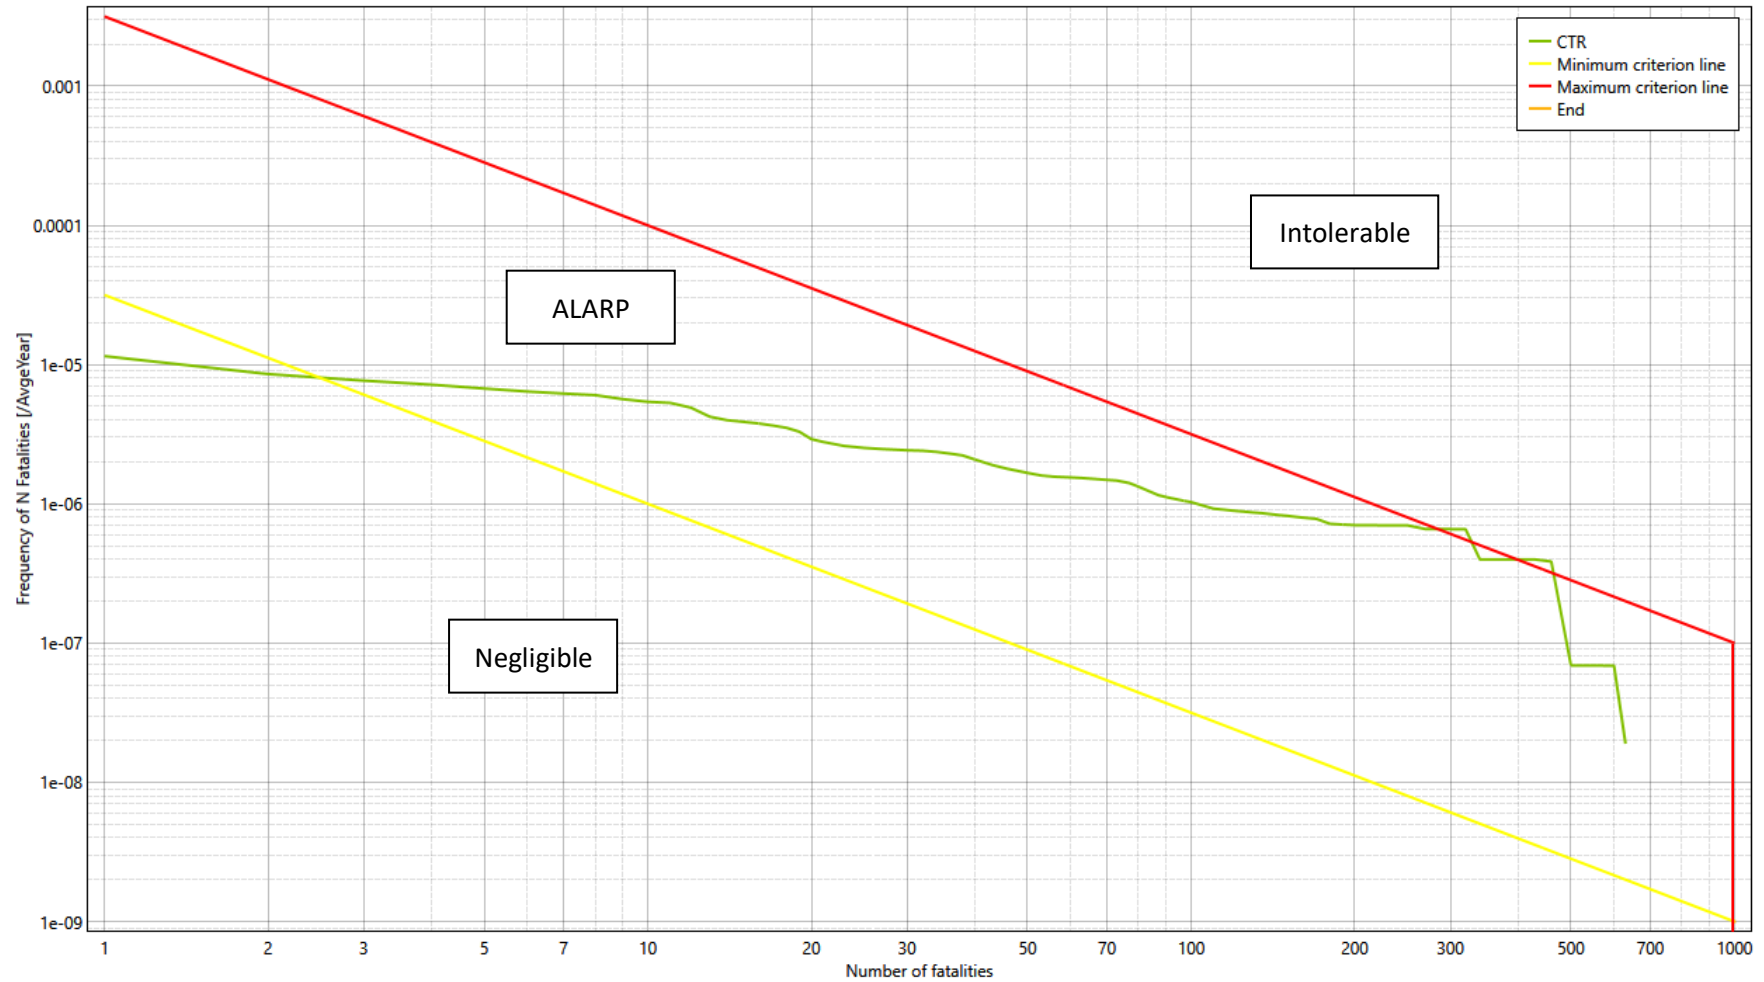

8.9 Risk Reduction Measures

Developing a planning scheme that recognises the risks arising from the high pressure pipelines, and manages development consistent with the DPIE risk criteria, is a risk reduction activity and recommendations on such are included in 9.2

Qualitative risk reduction measures not easily highlighted in this generic QRA may need to be undertaken by the pipeline owners and operators as the zoning in the measurement length changes from rural to urban zoning, including residential zones. The changes of land use will trigger a safety management study by the operators.

Additional engineering measures that could be included are increasing the number of ALBV's and MLVs in the GMGA. For example, the EGP has two MLVs within the GMGA land release area, whereas the CTM and MSE have only one ALBV. The closest MLV in the EGP upstream of Appin is at O'Brien's Gap, approximately 29 km upstream of the GMGA. This presents a considerable inventory that will be released if a major accident occurs. This is compared to around a 11 km interval in MLVs further downstream (Appin, Menangle Park, Raby Road and Austral). While additional isolation points will not necessarily reduce the risk as calculated by this QRA (focus on the 30 seconds of release for jet fires), isolation will be necessary to allow emergency services early access to the area.

9 FINDINGS AND RECOMMENDATIONS

9.1 Findings

The following findings were made from the risk assessment:

- When running in parallel with each other, the three pipelines generate location specific individual risk of fatality greater than 0.5×10^{-6} and 1.0×10^{-6} p.a., which limits the sensitive use and residential development in the vicinity of the pipelines. For the majority of the GMGA land release area, the LSIR is above 0.5×10^{-6} p.a. for up to 200 m from the CTM. The LSIR is above 1.0×10^{-6} p.a. for up to 125 m either side of the CTM. As the pipelines diverge in the north and south of the GMGA land release area, the distance to specified risk levels increases until the diverging pipelines are separated sufficiently to minimise the interaction with each other.
- Residential development in areas where the residential individual risk criterion is satisfied can be up to the proposed maximum dwelling density for the GMGA of 45 dwellings per hectare without exceeding the societal risk criteria.
- Non-residential and development either side of the pipeline corridor up to an average population density of 0.0126 ppl/m^2 may be undertaken without exceeding the societal risk criteria.

9.2 Recommendations

1. Implement a buffer zone between the pipelines and any residential development;
 - a. For the majority of the GMGA growth area where all three pipelines run parallel in a common corridor in a North-South direction, there should be no residential development within 125m of the CTM.
 - b. Where the path of the EGP diverges from the CTM and MSE in the northern and southern regions of the GMGA land release area, there should be no residential development between the pipelines and the 1.0×10^{-6} p.a LSIR contours shown in red in Figure 1 and Figure 2.
2. Implement a buffer zone between the pipelines and any sensitive use developments such as schools, childcare facilities, hospitals or aged-care facilities;
 - a. For the majority of the GMGA growth area where all three pipelines run parallel in a common corridor in a North-South direction, there should be no sensitive use development within 200m of the CTM.
 - b. Where the path of the EGP diverges from the CTM and MSE in the northern and southern regions of the GMGA land release area, there should be no sensitive use development between the pipelines and the 0.5×10^{-6} p.a LSIR contours shown in orange in Figure 1 and Figure 2
3. To satisfy the DPIE societal risk criteria, land use immediately either side of the pipeline corridor where the three pipelines run parallel should be restricted to uses where the average population density is 0.0126 ppl/m^2 . Based on the 2015 SGS Economic and Employment Analysis [3], this could include large format retail, local industry, subregional industry and footloose. Other non-commercial / industrial uses such as recreation would also be suitable provided the average density remains at or below 0.0126 ppl/m^2 .
4. Consent should not be granted to any planning or development proposal within the measurement length of the respective pipelines that could increase population density

above 0.0126 ppl/m² unless accompanied by a hazard analysis consistent with HIPAP 6 and HIPAP 10, demonstrating the DPIE individual and societal risk criteria are satisfied.

10 REFERENCES

- [1] NSW Department of Planning, "Hazardous Industry Planning Advisory Paper No.6 - Hazard Analysis," Sydney, 2011.
- [2] NSW Department of Planning, "Hazardous Industry Planning Advisory Paper No.10 - Land Use Safety Planning," Sydney, 2011.
- [3] SGS Economics and Planning Pty Ltd, "Greater Macarthur Investigation Area Economic and Employment Analysis," 2015.
- [4] NSW Department of Planning and Environment, "Greater Macarthur 2040 : An interim plan for the Greater Macarthur Growth Area," 2018.
- [5] Urbis, "Density Study greater MacArthur," 2019.
- [6] APA Group, "Emails from Paul Walters to Arriscar: APA Ethane Pipeline," 2020.
- [7] Jemena Limited, "Emails from Luke Duncan to Arriscar: Jemena gas pipelines," 2020.
- [8] NSW Department of Planning, "Hazardous Industry Planning Advisory Paper No.4 - Risk Criteria for Land Use Safety Planning," Sydney, 2011.
- [9] Health and safety Laboratory, "Research Report RR 1035 - Update of pipeline failure rates for land use planning assessments," HSE Books, London, 2015.
- [10] Occupational Safety and Health Administration, "Precautions and the order of testing before entering confined and enclosed spaces and other dangerous atmospheres.," US Department of Labour, Washington, D.C., 1995.
- [11] Standards Australia, "AS 2885.0 - Pipelines - Gas and Liquid Petroleum. Part 0 - General Requirements," 2008.
- [12] Standards Australia, "Pipelines - Gas and Liquid Petroleum Operations and Maintenance," 2012.
- [13] ICD (Asia Pacific), "East Leppington Public School Safety Management Study," 12 August 2019.
- [14] Standards Australia, "Pipelines - Gas and liquid petroleum Design and construction," 2018.
- [15] NSW Planning & Environment, "New Douth Wales 2017-18 Gas Networks Performance Report," 2018.
- [16] DNVGL, "SAFETI 8.2.3 Technical reference manual," 2019.
- [17] New South Wales Department of Industry, Resources and Energy, "Licensed Pipelines Performance Report 2017-2018," 2018.
- [18] British Standards Institute, "Pipeline Systems - Part 3: Steel Pipes on Land - Guide to the Application of Risk assessment to Proposed Developments in the Vicinity of Major Accident Hazard Pipelines contaibng Flammables," 2013.
- [19] U.S. Department of Transportation (DoT), "Pipeline and Hazardous Materials Safety Administration (PHMSA), Accident Reports - Hazardous Liquid Pipeline Systems (January 2010 to September 2018).," 2018.

- [20] International Association of Offshore Oil & Gas Producers, "Risk Assessment Data Directory - Ignition Probabilities," 2010.
- [21] E. N. F. e. M. P. a. K. Silva, "Underground parallel pipelines domino effect: An analysis based on pipeline crater models and historical accidents," vol. 43, no. June, 2016.

Appendices

Appendix A Assumptions

It is necessary to make technical assumptions during a risk analysis. These assumptions typically relate to specific data inputs (e.g. material properties, equipment failure rates, etc.) and modelling assumptions (e.g. release orientations, impairment criteria, etc.).

To comply with the general principles outlined in Section 2.2 of HIPAP No. 6, all steps taken in the risk analysis should be: *“traceable and the information gathered as part of the analysis should be well documented to permit an adequate technical review of the work to ensure reproducibility, understanding of the assumptions made and valid interpretation of the results”*. Therefore, details of the key assumptions adopted for the risk analysis are provided in this Appendix.

Each assumption is numbered and detailed separately. The basis for each assumption is explained together with its potential impact on the risk results and the Major Accident Events (MAEs) potentially affected. Key references are also listed for each assumption, where relevant.

It is important that the assumptions be supported by:

- experimental data in the literature, where available;
- actual operating experience, where available;
- similar assumptions made by experts in the field and a general consensus among risk analysts; and
- engineering judgement of the analyst.

The main objectives are to minimise uncertainty in the risk estimate as far as is possible, and to ensure that the assumptions result in a ‘conservative best estimate’ of the risk. Such an approach is consistent with the following extract from Section 5 of HIPAP No. 6: *“In the consequence analysis and throughout the hazard analysis, the analyst must be conscious of the uncertainties associated with the assumptions made. Assumptions should usually be made on a ‘conservative best estimate’ basis. That is, wherever possible the assumptions should closely reflect reality. However, where there is a substantial degree of uncertainty, assumptions should be made which err on the side of conservatism.”*

List of Assumptions

Assumption No. 1 Pipeline Operating Conditions	62
Assumption No. 2 Pipeline Utilisation.....	62
Assumption No. 3: Representative Wind Speeds, Wind Directions and Stability Classes.....	63
Assumption No. 4: Ambient Conditions.....	64
Assumption No. 5: Surface Roughness Length.....	65
Assumption No. 6: Location of High Pressure Gas Pipelines.....	66
Assumption No. 7: Residential Population (Day and Night)	67
Assumption No. 8: Indoor / Outdoor distribution of people	68
Assumption No. 9: Location and Segmentation of Pipelines.....	69
Assumption No. 10: Representative Materials.....	70
Assumption No. 11: Pressure and Flow for Release Modelling	71
Assumption No. 12: Representative Hole Diameters for Release Modelling	72
Assumption No. 13: Location of Release for Transmission Pipelines	73
Assumption No. 14: Maximum Extent of Flash Fire	74
Assumption No. 15: Isolation Time and Duration of Release	75
Assumption No. 16: Shielding by Intervening Structures.....	75
Assumption No. 17: 3D Explosion Model Parameters	76
Assumption No. 18: Escalation due to Propagation Between Adjacent Pipelines	77
Assumption No. 19: Likelihood of Release (Loss of Containment)	78
Assumption No. 20: Ignition Probability	79
Assumption No. 21: Probability of VCE or Flash Fire	79
Assumption No. 22: Exposure to Heat Radiation from a Fire (Indoor or Outdoor)	80
Assumption No. 23: Exposure to Flash Fire (Indoor or Outdoor).....	82
Assumption No. 24: Exposure to Explosion Overpressure (Indoor or Outdoor)	83

A.1 Operational Data

Assumption No. 1 Pipeline Operating Conditions
Subject: Operational Data
Assumption/s: <ul style="list-style-type: none"> All pipeline operating conditions (pressure, temperature, etc.) are as reported in Sections 3.2 and 3.3.
Justification and Impact/s of Assumption/s: <ul style="list-style-type: none"> All operational data for the Ethane pipeline was provided by the pipeline owner (APA Group). All operational data for the Natural Gas pipelines (CTM and EGP) was provided by the pipeline operator, Jemena Limited. Operating conditions (particularly operating pressure) are required to undertake the release and dispersion modelling.
MAE/s Affected: <ul style="list-style-type: none"> All.
Reference/s: <ul style="list-style-type: none"> Data provided by APA Group Data provided by Jemena Limited

Assumption No. 2 Pipeline Utilisation
Subject: Operational Data
Assumption/s: <ul style="list-style-type: none"> The Ethane pipeline is utilised 100% of the time. The Natural Gas pipelines (CTM and EGP) are utilised 100% of the time.
Justification and Impact/s of Assumption/s: <ul style="list-style-type: none"> Utilisation data is required to undertake the release and dispersion modelling and to estimate the release frequency.
MAE/s Affected: <ul style="list-style-type: none"> All.
Reference/s: <ul style="list-style-type: none"> Data provided by APA Group Data provided by Jemena Limited).

A.2 Locational Data

Assumption No. 3: Representative Wind Speeds, Wind Directions and Stability Classes
<p>Subject: Locational Data</p>
<p>Assumption/s:</p> <ul style="list-style-type: none"> • The probabilistic distribution of wind speed and wind direction for the representative stability classes is provided in Section 2.3. • Night-time is considered the period from 1 hour before sunset, to one hour after sunrise. This approximates to 10 hours daytime and 14 hours night-time. • The distribution of stability classes is presented in Section 2.3.
<p>Justification and Impact/s of Assumption/s:</p> <ul style="list-style-type: none"> • Meteorological data (mean cloud cover, temperature, wind speeds) is collected by the Bureau of Meteorology (BoM) for the Camden Automatic Weather Station weather station for the period 1995-2014. This raw data was rationalised into a set of wind speed/weather stability classes for dispersion calculations. The Camden Airport weather station was selected as being the closest to the GMGA with sufficient data and most representative. • Wind will cause flames to tilt downwind. The higher the wind speed, the greater the tilt. The net effect of the tilt is to increase the heat radiation in the downwind direction. This is much more pronounced for pool fires than jet fires because jet fires have much greater momentum. An allowance for flame tilt is included in the SAFETI models for pool fires and vertical jet fires. The SAFETI model assumes horizontal jet fires are directed in the same direction as the wind. • The downwind gas concentrations, and hence the hazard ranges for dispersion of flammable gas or vapour, vary with wind speed and weather stability class. Therefore, multiple representative wind speed and stability class categories are included in accordance with standard practice for undertaking a quantitative risk assessment (QRA). • The day/night split of the weather data is required to allow for the fact that residential, commercial and industrial occupancies change over a 24 hour period.
<p>MAE/s Affected:</p> <ul style="list-style-type: none"> • All.
<p>Reference/s:</p> <ul style="list-style-type: none"> • BoM meteorological data for Camden Airport weather station, ID: 068192.

Assumption No. 4: Ambient Conditions	
Subject:	Locational Data
Assumption/s:	<ul style="list-style-type: none"> The typical ambient conditions (temperature, atmospheric pressure, solar radiation and relative humidity) are provided in Section 2.3.
Justification and Impact/s of Assumption/s:	<ul style="list-style-type: none"> The average ambient temperature is a required input for the SAFETI model. The temperature of the material in each pipeline is similar; therefore, the average ambient temperature does not have a significant impact on the consequence calculations. The average relative humidity is a required input for the SAFETI model. This is used in thermal radiation calculations to attenuate the heat radiation. The average solar radiation is a required input for the SAFETI model.
MAE/s Affected:	<ul style="list-style-type: none"> All.
Reference/s:	<ul style="list-style-type: none"> BoM meteorological data for Camden AWS.

Assumption No. 5: Surface Roughness Length

Subject: Locational Data

Assumption/s:

- The roughness length for different surface types, as listed in the SAFETI user manual, is shown below in Table 14.

Table 14 Surface Roughness Length

Description	Roughness Length (m)
Open water, at least 5 km	0.0002
Mud flats, snow, no vegetation, no obstacles	0.005
Open flat terrain, grass, few isolated objects	0.03
Low crops; occasional large obstacles, $x/h > 20$	0.1
High crops, scattered large obstacles, $15 < x/h < 20$	0.25
Parkland, bushes, numerous obstacles, $x/h < 15$	0.5
Regular large obstacle coverage (suburb, forest)	1
City centre with high- and low-rise buildings	3

- A conservative roughness length of 1.0 m is applicable for the regular large obstacle coverage expected in suburban areas within the GMGA when fully developed.

Justification and Impact/s of Assumption/s:

- The surface roughness affects the dispersion analysis. As the surface roughness increases, a release of gas or vapour will disperse more quickly with increasing distance from the source. Therefore, it is necessary in SAFETI to select a surface roughness length that is representative of the types of terrain and obstacles near the source of release.
- It is not possible to define different surface roughness lengths for different locations within a single SAFETI model. Only a single representative value can be defined for the entire area.
- The purpose of the analysis is to determine the level of risk once the GMGA is developed into a suburban environment.

MAE/s Affected:

- Dispersion modelling for all relevant MAEs.

Reference/s:

- SAFETI software documentation.

Assumption No. 6: Location of High Pressure Gas Pipelines

Subject: Locational Data

Assumption/s:

- The location of all three pipelines is sourced from the APGA Australian Pipeline Database

Justification and Impact/s of Assumption/s:

- The Australian Pipeline Database (APD) is made available to users to raise awareness of the location of high-pressure hydrocarbon pipelines and facilitate discussions between pipeline operators and stakeholders regarding the potential for planning and development decisions to trigger requirements in the Australian Standard, AS 2885, for pipeline Safety Management Studies.
- Use of the APD is conditional on several factors that are consistent with the objectives of this study, including:
 - The APD is to be used solely for the purpose of facilitating discussion regarding planning activity and decisions in the vicinity of pipelines. **This is consistent with the objectives of this study.**
 - The APD is not to be used for proving and construction activities. Dial Before You Dig enquiries must be made for these activities and any condition complied with. **It is not the intent of this study to provide detailed construction information.**
- When overlaid onto aerial photos, the APGA Pipeline database accuracy appears no less accurate than the accuracy expected of the consequence models and frequency estimates.

MAE/s Affected:

- All.

Reference/s:

- APGA Australian Pipeline Database.

Assumption No. 7: Residential Population (Day and Night)

Subject: Locational Data

Assumption/s:

- The average number of residents per household used for the base case is 2.8.
- The average number of residents per dwelling may be as high as 3.2.
- The local night-time residential population is derived from multiplying the number of people per household by the dwelling density in the proposed development. Dwelling densities range between 10 and 45 dwellings per hectare.
- The daytime population is 61% of the night-time population.

Justification and Impact/s of Assumption/s:

- The average number of residents per dwelling is based on the 2015 report “Greater Macarthur Investigation Area Economic and Employment Analysis”.
- The total number of people in the Campbelltown and Camden LGAs as at the 2016 census was 235,221, while the total number of dwellings was 81,524 producing an average number of people per dwelling if 2.9. Of the total number of dwellings, 7,467 were listed as “Not Applicable”. People per dwelling for all “Applicable” dwellings is 3.2.
- Dwelling density range is based on the 2019 draft report “Density Study, Greater Macarthur”.
- Daytime population is assumed to be the night-time population less the number of persons travelling more than 1 km from home for the day. This has been inferred from the following observations from the 2016 census results in the Camden and Campbelltown LGAs:
 - 35% of persons reported working more than 25 hours per week.
 - 94% of persons reporting a distance other than “Not Applicable” in the census quoted the distance to their workplace was more than 1 km. It is assumed if people travel less than 1 km to work, they may still be impacted by pipeline events.
 - 6% of persons reported attending a TAFE or Tertiary educational institution either part time or full time. Implicit in this is that TAFE and Tertiary educational institutions are not typically found in residential areas.
 - People leaving the area impacted by pipeline events during the day are therefore $35\% \times 94\% + 6\% = 39\%$.

MAE/s Affected:

- All societal risk calculations. Population density, along with the area of consequence distances, determines the fn points of societal risk.
- Locational specific risk is not impacted by these assumptions.

Reference/s:

- SGS Economics and Planning, “Greater Macarthur Investigation Area Economic and Employment Analysis”, NSW Department of Planning and Environment, 2015.
- Urbis, “Density Study, Greater Macarthur”, NSW Department of Planning and Environment, Draft for Review, July 2019.
- Census of Population and Housing, 2016, TableBuilder.

Assumption No. 8: Indoor / Outdoor distribution of people											
Subject: Locational Data											
Assumption/s:											
<ul style="list-style-type: none"> • 99% of the night time population will be located indoors. • 90% of the daytime population will be located indoors. • All population is located at ground level. 											
Justification and Impact/s of Assumption/s:											
<ul style="list-style-type: none"> • The default values recommended by the TNO [‘Purple Book’] for residential and industrial areas are tabulated below. <p style="text-align: center;">Table 15 Proportion of Population Indoor and Outdoor During Day and Night [TNO]</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th style="background-color: #008080; color: white;">Location</th> <th style="background-color: #008080; color: white;">Day Time (8am to 6:00pm)</th> <th style="background-color: #008080; color: white;">Night Time (6:00pm to 8am)</th> </tr> </thead> <tbody> <tr> <td>Indoor</td> <td style="text-align: center;">93%</td> <td style="text-align: center;">99%</td> </tr> <tr> <td>Outdoor</td> <td style="text-align: center;">7%</td> <td style="text-align: center;">1%</td> </tr> </tbody> </table>			Location	Day Time (8am to 6:00pm)	Night Time (6:00pm to 8am)	Indoor	93%	99%	Outdoor	7%	1%
Location	Day Time (8am to 6:00pm)	Night Time (6:00pm to 8am)									
Indoor	93%	99%									
Outdoor	7%	1%									
<ul style="list-style-type: none"> • The % of the total population located indoors and outdoors was estimated from similar risk analyses (Including some data provided by DPIE). It is reported in these analyses that the % of people indoors and outdoors is 90% indoors and 10% outdoors during the day, which differs slightly from the TNO data, but is typically justified as being more applicable for Australian environmental conditions. Similarly, it is reported in these analyses that the % of people indoors and outdoors is 95 to 99% indoors and 1 to 5% outdoors during the night. 											
MAE/s Affected:											
<ul style="list-style-type: none"> • All societal risk calculations. 											
Reference/s:											
<ul style="list-style-type: none"> • TNO, VROM, Guidelines for Quantitative Risk Assessment, 'Purple Book', CPR18E, 3rd Edition. 											

A.3 Risk Analysis Methodology

Assumption No. 9: Location and Segmentation of Pipelines
Subject: Risk Analysis Methodology
Assumption/s: <ul style="list-style-type: none"> Representative release events are modelled using the 'Long Pipeline' model in SAFETI, which distributes these events along the pipeline at set intervals.
Justification and Impact/s of Assumption/s: <ul style="list-style-type: none"> The 'Long Pipeline' model in SAFETI is used to estimate the time-dependent release from a long pipeline. The 'Long Pipeline' model includes inputs for use in the risk calculations, such as pipeline burial depth, leak frequency, etc. The interval at which representative incidents are distributed along the pipeline is selected automatically by the 'Long Pipeline' model based on the incident consequence.
MAE/s Affected: <ul style="list-style-type: none"> All.
Reference/s: <ul style="list-style-type: none"> SAFETI software documentation.

A.4 Consequence Analysis

Assumption No. 10: Representative Materials
<p>Subject: Consequence Analysis</p>
<p>Assumption/s:</p> <ul style="list-style-type: none"> • Ethane is modelled as 100% Ethane. • Natural gas is modelled as 100% Methane.
<p>Justification and Impact/s of Assumption/s:</p> <ul style="list-style-type: none"> • The composition and materials used affect the magnitude of the consequences. Materials containing multiple components are simplified for modelling purposes by choosing a representative component to best approximate the variable composition. Modelling a representative material rather than a multi-component material reduces complexity, limits the potential for inconsistencies and ultimately has a minimal effect on the results. • The natural gas in the pipelines has been processed for domestic and industrial consumption. As part of the processing, valuable by products such as ethane, propane and butane have been removed at several major producers such as Moomba and Longford. Heavier hydrocarbons are also typically removed to prevent condensation. • Natural gas typically contains 85 to 95% methane. In 1996-97, the composition of natural gas used in Melbourne was 91.2% methane. • The ethane pipeline carries ethane which has been processed to serve as a petrochemical feed stock.
<p>MAE/s Affected:</p> <ul style="list-style-type: none"> • All.
<p>Reference/s:</p> <ul style="list-style-type: none"> • Data provided by APA Group. • Natural Gas: Energy for the New Millennium, Research Paper 5 1998-99, Mike Roarty, Science, Technology, Environment and Resources Group' December 1998.

Assumption No. 11: Pressure and Flow for Release Modelling

Subject: Consequence Analysis

Assumption/s:

- A release of Ethane from the Moomba to Sydney Ethane Pipeline is modelled at 8.2 MPag (Operating pressure), compared to an MAOP of 10 MPag.
- A release of Natural Gas from the Jemena Eastern Gas pipeline (EGP) is modelled at 14.895 MPag, which is also the MAOP for the pipeline.
- A release of Natural Gas from the (CTM) is modelled at 5 MPag (operating pressure is between 4.5 and 5 MPag), compared to an MAOP of 6.895 MPag.
- Release events are modelled using the 'Long Pipeline' model in SAFETI and may be based on a time varying release rate (depending on hole size).
- All pipelines have assumed zero flow.

Justification and Impact/s of Assumption/s:

- The release rate is dependent on the pressure and the MAOP is the maximum pressure permitted under an existing licence.
- The pressure used to model the release rates was based on the pipeline pressure near the proposed development, as advised by the pipeline owner (Refer to Sections 3.2 and 3.3).
- The long pipeline model assumes the input pressure is reduced by frictional losses along the pipeline length until the breach point. This results in a lower initial release rate.
- Providing a flow will slow the rate of pressure reduction calculated by the long pipeline model, but this is insignificant for the initial 30 second release, the basis of which the impact for jet fire has been assumed.
- A flow will increase the residual pressure the long pipeline model calculates, but as it will take much longer than 30 seconds to reach residual pressure, this is not relevant.

MAE/s Affected:

- All.

Reference/s:

- Data provided by APA Group.
- Data provided by Jemena Limited.

Assumption No. 12: Representative Hole Diameters for Release Modelling

Subject: Consequence Analysis

Assumption/s:

- Consequence modelling is based on the following representative hole diameters:

Table 16 Representative Hole Diameters Selected for Consequence Analysis

Pipeline/s	Material	Internal Pipeline Diameter (mm)	Representative Hole Diameter (mm)			
			Pinhole (≤ 25 mm)	Small Hole (> 25 mm to ≤ 75 mm)	Large Hole (> 75 mm to ≤ 110 mm)	Rupture (> 110 mm)
APA Ethane Pipeline	Ethane	202.9	10 or 25*	75	110	Full bore
Jemena Eastern Gas Pipeline (EGP)	Natural Gas	433.6	10 or 25*	75	110	Full bore
Jemena Gas Network CTM	Natural Gas	836.8	10 or 25*	75	110	Full bore

* 10 mm for all failure modes except Third Party Activity (TPA). 25 mm for TPA only.

Justification and Impact/s of Assumption/s:

- The representative hole diameters were selected to align with the leak frequency data (Refer to C.1), which includes four hole size categories: Pinhole (≤ 25 mm); Small Hole (> 25 mm to ≤ 75 mm), Large Hole (> 75 mm to ≤ 110 mm); and, Rupture (> 110 mm). The representative hole diameter/s in each hole size category were selected based on a review of the available historical data (Refer to Appendix B.1):
 - Leaks from underground pipelines in the Pinhole size category tend to be larger for TPA incidents (i.e. typically c. 20 mm to 25 mm – Refer to Appendix D) than for the other failure modes (i.e. typically less than c. 10 mm). Therefore, two representative hole diameters were selected in this category: 25 mm for TPA and 10 mm for all other failure modes.
 - There is insufficient historical incident data for Ethane to determine the representative hole diameter/s in each hole size category. Therefore, the representative hole diameters were assumed to be the same as proposed by the UK HSE for LPG (Refer to C.1). Ethane is transported as a liquefied flammable gas.

MAE/s Affected:

- All.

Reference/s:

- Refer to Appendix B.1.

Assumption No. 13: Location of Release for Transmission Pipelines

Subject: Consequence Analysis

Assumption/s:

- High pressure gas releases would create a crater on the ground. The direction of release for underground pipeline failures from the crater is always vertical.
- The location of failure on the pipe can be taken as:
 - Top of the pipe (unobstructed releases); or
 - Middle of the pipe (on the side – obstructed releases)
- The release frequency is distributed between the two locations (37% from middle of pipe and 63% from top of pipe for all release cases except non-TPA events with a hole size less than or equal to 25mm, which are modelled as 100% from middle of pipe).

Justification and Impact/s of Assumption/s:

- The crater size depends on the location of the hole on the pipe and hence all three locations (top, middle and bottom) may be modelled (DNVGL, 2020). Top releases are taken as non-obstructed releases and middle/ bottom releases are taken as obstructed releases.
- Impingement reduces the momentum of the release and the dispersion modelling is dominated by the representative wind conditions.
- The UK HSE [RR 1034] reports that some data from UKOPA includes the ‘hole circumferential position’ for releases from underground pipelines. Based on the 71 recorded incidents (All pipelines and materials) and average crater dimensions, an unobstructed release (c. $\pm 71^\circ$ from vertical) was estimated to occur for 63% of the releases and an obstructed release was estimated to occur for the balance (37% of releases). The distribution is not reported for different failure modes.

MAE/s Affected:

- All.

Reference/s:

- SAFETI software documentation.
- UK HSE, 2015, *Review of the Event Tree Structure and Ignition Probabilities used in HSE’s Pipeline Risk Assessment Code MISHAP*, Research Report (RR) 1034.

Assumption No. 14: Maximum Extent of Flash Fire

Subject: Consequence Analysis

Assumption/s:

- The maximum extent of a flash fire is defined by the downwind and crosswind distances from the release location to a concentration equal to 100% of the lower flammability limit (LFL) concentration calculated using an 18.75s averaging time.

Justification and Impact/s of Assumption/s:

- Justification is provided in (Benintendi, 20171031, p. 341):
 For passive dispersion models, the shorter the averaging time, the higher the centreline concentration, and there is concern that flammable concentrations may exist beyond the 100% LFL contour determined for a specific averaging time.
 To take into account the different averaging times, the following empirical formula is recommended for converting concentrations from 10 minute averaging time to another (Hanna et al., 1993):

$$\frac{C_t}{C_{600}} = \left(\frac{600}{t}\right)^{0.2} \dots(1)$$

where time is in seconds. C_t denotes time averaged concentration at the new averaging time of t seconds

Hanna claims that experimentally:

$$C_{max} = 2 \times C_{600} \dots(2)$$

where C_{max} is the maximum peak concentration in the plume.

Substituting C_{max} from (2) with $C_{600} \left(\frac{600}{t}\right)^{0.2}$ from (1) and solving for t , it yields

$$t = 18.75 \text{ s.}$$

This time should be adopted to carry out worst case predictions for the extent of 100% LFL. It is the core averaging time for flammable dispersion in SAFETI.

- For the materials under consideration, flash fires are not expected to be a major contributor because the gases involved are either buoyant, or have a neutral buoyancy, and should ignition occur, effects from jet fires are expected to dominate.

MAE/s Affected:

- All MAEs with a flash fire as a potential outcome.

Reference/s:

- SAFETI software documentation.
- Benintendi, R. (20171031). Process Safety Calculations. [[VitalSource Bookshelf version]]. Retrieved from vbk://9780081012291.
- Hanna, S.R., Strimaitus, D.G., Chang, J., 1993. Hazard Response Modeling Uncertainty (A Quantitative Method) Vol 11 - Evaluation of Commonly Used Hazardous Gas Dispersion Models, Environics Division Air Force Engineering & Services Center, Engineering & Services Laboratory.

Assumption No. 15: Isolation Time and Duration of Release

Subject: Consequence Analysis

Assumption/s:

- Isolation time and duration of release is not specified as these will be significantly longer than the period of exposure required for an adverse effect to people (Refer to Section A.6) and time required for each representative release case to reach steady state.
- Isolation times were included for the MSE, but analysis has shown the rationalised discharge scenarios used on the model were the same for isolated and no isolation release.

Justification and Impact/s of Assumption/s:

- Ethane and natural gas are flammable and any adverse impact will occur quickly (fire or explosion); therefore, the duration of exposure is not as critical as it would be if there were toxic materials in the pipeline (i.e. where the adverse impact can significantly increase for longer exposure durations).
- The assumption is justified from the consequence calculations of the Long Pipeline Model, using a 30 sec. exposure time (user specified), compared to isolation valve closure times which typically vary from minutes (full bore rupture case) to hours (small to medium leaks).

MAE/s Affected:

- All.

Reference/s:

- SAFETI software documentation.

Assumption No. 16: Shielding by Intervening Structures

Subject: Consequence Analysis

Assumption/s:

- The presence of intervening structures (e.g. buildings) does not shield other receptors from the heat radiation from a jet fire.

Justification and Impact/s of Assumption/s:

- In the SAFETI software, it is not possible to take account of the potential protection provided by intervening structures.
- This analysis is taking place during the concept stage of development of a large growth area. There is insufficient information available to determine the location of large structures that could offer protection against radiant heat.
- People located indoors are typically less vulnerable to fire, which is a relevant consideration for the societal risk assessment (Refer to Assumption No. 22).

MAE/s Affected:

- All MAEs with a pool fire or jet fire as a potential outcome.

Reference/s:

- SAFETI software documentation.

Assumption No. 17: 3D Explosion Model Parameters

Subject: Consequence Analysis

Assumption/s:

- The maximum explosive mass in a flammable gas or vapour cloud is the maximum mass between the LFL and UFL concentration for that section of the cloud that overlaps a congested area.
- The peak side-on overpressure resulting from an explosion is estimated using the Extended Explosion Modelling option in the SAFETI software.
- The severity of the blast is based on an unconfined blast strength of 4, with no specified obstruction region.
- The blast strength is estimated based on the obstructed volume (%) and potential obstructions in each congested area. The following congested areas are included in the QRA:
 - **Buildings** - A medium obstructed volume (60% for a residential building) and level of congestion is assumed to simulate entry of the gas or vapour into the building and the subsequent confined explosion. This equates to TNO Model curve number 4.
- Only overpressure effects are included. Projectiles and whole-body displacement are not included.

Justification and Impact/s of Assumption/s:

- The explosive mass and blast strength are key parameters for modelling the overpressure from a VCE.
- There are no significantly congested locations in the study area; however, a confined explosion could occur if gas or vapour enters a building.
- The 3D Obstructed Region Explosion Modelling option considers the interactions between the flammable cloud and obstructed regions that have been defined for the study area. This is more valid than simple models (e.g. TNT equivalence) which do not consider these interactions.

MAE/s Affected:

- All MAEs with a VCE as a potential outcome.

Reference/s:

- Centre for Chemical Process Safety, Estimating the flammable mass of vapour clouds”, American Institute of Chemical Engineers, 1999.
- TNO, VROM, ‘Yellow Book’.
- SAFETI software documentation.

Assumption No. 18: Escalation due to Propagation Between Adjacent Pipelines

Subject: Consequence Analysis

Assumption/s:

- Escalation between pipelines will only occur if the radius of the crater created by a pipeline failure is larger than the distance between the failed pipeline and the pipeline subject to escalation.
- Propagation is non-credible to/from underground pipelines in different corridors.
- Escalation only occurs when there is propagation before sufficient mitigation of the initial fire.

Justification and Impact/s of Assumption/s:

- Escalation MAEs are generally lower likelihood and higher consequence events, which may affect the cumulative risk (Particularly the societal risk).
- The likelihood of propagation and escalation was estimated based on a review of historical incidents, primarily from Ref. [21], estimated crater dimensions from SAFETI, and the separation distance between the CTM and the MSE in the common easement. Based on this review, propagation and escalation was not considered a credible event for inclusion in the risk assessment.
- In a review of buried pipeline rupture incidents, it was found that there was 1 escalation in 8 cases of rupture when an adjacent pipeline was exposed [21].

MAE/s Affected:

- Escalation MAEs only.

Reference/s:

- E.P. Silva, M. Nele, P. F.Frutoso e Melo, and L. Könözy, *Underground parallel pipelines domino effect: An analysis based on pipeline crater models and historical accidents*, Journal of Loss Prevention in the Process Industries, June 2016.

A.5 Likelihood Analysis

Assumption No. 19: Likelihood of Release (Loss of Containment)
<p>Subject: Likelihood Analysis</p>
<p>Assumption/s:</p> <ul style="list-style-type: none"> • The likelihood of each representative release is provided in Appendix C.1.3. • The UK HSE pipeline failure rate data is the primary data used for the risk assessment. • The contribution to pipeline failure from ground movement has been adjusted down to allow for local conditions.
<p>Justification and Impact/s of Assumption/s:</p> <ul style="list-style-type: none"> • The estimated likelihood of release (or loss of containment) is a critical and significant input for the risk analysis. The risk results are directly proportional to this input. • Generic failure rate data for cross-country pipelines from the UK, USA and Europe were reviewed. The UK data incorporates the European data. There are two sources of data from the UK: (a) HSE recommended data for land use safety planning (RR 1035); and (b) British Standards Institute PD 8010-3:2009+A1:2013. The HSE data is primarily used in this study, which is consistent with the NSW performance data. • The HSE data identifies four contributors to pipeline failure: (a) mechanical failure; (b) corrosion; (c) ground movement/other; and (d) Third Party Activity (TPA). Of these, mechanical, corrosion and TPA are similar to conditions in Australia and hence no frequency adjustments due to local conditions are justified. • The justification for the data used in this risk analysis is provided in Appendix C.1.
<p>MAE/s Affected:</p> <ul style="list-style-type: none"> • All.
<p>Reference/s:</p> <ul style="list-style-type: none"> • Refer to Appendix C.1.

Assumption No. 20: Ignition Probability	
Subject:	Likelihood Analysis
Assumption/s:	<ul style="list-style-type: none"> The probability of ignition for each representative release is provided in Appendix C.1.3.
Justification and Impact/s of Assumption/s:	<ul style="list-style-type: none"> The estimated probability of ignition is a critical and significant input for the risk analysis. The risk results are directly proportional to this input. The justification for the data used in this risk analysis is provided in Appendix C.1.3.
MAE/s Affected:	<ul style="list-style-type: none"> All.
Reference/s:	<ul style="list-style-type: none"> Refer to Appendix C.1.3.

Assumption No. 21: Probability of VCE or Flash Fire	
Subject:	Likelihood Analysis
Assumption/s:	<ul style="list-style-type: none"> Ignition of a free gas or vapour cloud is modelled as a flash fire in uncongested areas and as a vapour cloud explosion in congested areas. Congested areas include buildings in the vicinity of the pipelines.
Justification and Impact/s of Assumption/s:	<ul style="list-style-type: none"> Ignition of a free gas cloud may demonstrate characteristics of a flash fire and/or an explosion. SAFETI uses the delayed ignition probability resulting in either of the events. Obstructed areas in the dispersing vapour cloud are defined by the user in the layout map. As the model calculates gas dispersion, it automatically calculates the consequence as vapour cloud explosion in congested areas and flash fires in uncongested areas. The current version of SAFETI, with the 3D obstructed area module, does not require a conditional probability of an explosion given ignition.
MAE/s Affected:	<ul style="list-style-type: none"> All MAEs with clouds in an obstructed region.
Reference/s:	<ul style="list-style-type: none"> SAFETI software documentation. TNO, VROM, <i>Guidelines for Quantitative Risk Assessment</i>, 'Purple Book', CPR18E, 3rd Edition.

A.6 Vulnerability Parameters

Assumption No. 22: Exposure to Heat Radiation from a Fire (Indoor or Outdoor)																		
<p>Subject: Vulnerability Parameters</p>																		
<p>Assumption/s:</p> <ul style="list-style-type: none"> For individuals located outdoors, the probability of fatality is based on the following probit equation [TNO 'Purple Book']: $Y = -36.38 + 2.56 \ln(I^{1.333}t)$ <p>Where Y is the probit value, I is the heat radiation intensity (W/m²) and t is the exposure duration (seconds).</p> <ul style="list-style-type: none"> A maximum exposure duration of 30 seconds is applicable for individuals located outdoors in an urban setting. It is assumed after 30 seconds, the persons will have found shelter from heat radiation. The probability of fatality for an individual located outdoors (30 seconds exposure), as calculated using the above probit equation, is as follows: <p style="text-align: center;">Table 17 Probability of Fatality for Exposure to Heat Radiation (Outdoor)</p> <table border="1" style="margin-left: auto; margin-right: auto; border-collapse: collapse; text-align: center;"> <thead> <tr style="background-color: #008080; color: white;"> <th style="padding: 5px;">Heat Radiation Intensity (kW/m²)</th> <th style="padding: 5px;">Probit</th> <th style="padding: 5px;">Probability of Fatality</th> </tr> </thead> <tbody> <tr> <td style="padding: 5px;">4.7</td> <td style="padding: 5px;">1.19</td> <td style="padding: 5px;">0</td> </tr> <tr> <td style="padding: 5px;">12.6</td> <td style="padding: 5px;">4.55</td> <td style="padding: 5px;">0.32</td> </tr> <tr> <td style="padding: 5px;">15.9</td> <td style="padding: 5px;">5.35</td> <td style="padding: 5px;">0.63</td> </tr> <tr> <td style="padding: 5px;">23.0</td> <td style="padding: 5px;">6.61</td> <td style="padding: 5px;">0.94</td> </tr> <tr> <td style="padding: 5px;">35.0 *</td> <td style="padding: 5px;">8.04</td> <td style="padding: 5px;">1.0</td> </tr> </tbody> </table> <p>* - SAFETI assumes fatal injuries are incurred at 35 kW/m² and above, regardless of the exposure duration.</p> <ul style="list-style-type: none"> For the calculation of societal risk: <ul style="list-style-type: none"> The probability of fatality for individuals located outdoors is factored by 0.14 (SAFETI default) to allow for the protection provided by clothing and the possibility of seeking shelter behind obstacles. The probability of fatality for an individual located indoors is 0 at less than 35 kW/m² and 1.0 at 35 kW/m² or greater. 	Heat Radiation Intensity (kW/m ²)	Probit	Probability of Fatality	4.7	1.19	0	12.6	4.55	0.32	15.9	5.35	0.63	23.0	6.61	0.94	35.0 *	8.04	1.0
Heat Radiation Intensity (kW/m ²)	Probit	Probability of Fatality																
4.7	1.19	0																
12.6	4.55	0.32																
15.9	5.35	0.63																
23.0	6.61	0.94																
35.0 *	8.04	1.0																

Assumption No. 22: Exposure to Heat Radiation from a Fire (Indoor or Outdoor)

Justification and Impact/s of Assumption/s:

- The probit equation adopted for the risk analysis is generally consistent with the following data from HIPAP No. 4.

Table 18 Effects of Thermal Radiation

Heat Radiation Intensity [kW/m ²]	Effect/s
1.2	Received from sun in summer at noon.
1.6	Minimum necessary to be felt as pain.
4.7	Pain in 15 to 20 seconds, 1st degree burns in 30 seconds. Injury (second degree burns) to person who cannot escape or seek shelter after 30s exposure.
12.6	High chance of injury. 30% chance of fatality for extended exposure. Melting of plastics (cable insulation). Causes the temperature of wood to rise to a point where it can be ignited by a naked flame after long exposure. Thin steel with insulation on the side away from the fire may reach a thermal stress level high enough to cause structural failure.
23.0	Fatality on continuous exposure. 10% chance of fatality on instantaneous exposure. Spontaneous ignition of wood after long exposure. Unprotected steel will reach thermal stress temperatures, which can cause failure. Pressure vessel needs to be relieved or failure would occur.
35.0	25% chance of fatality on instantaneous exposure.
60.0	Fatality on instantaneous exposure.

- It is reported in the TNO 'Purple Book' that people indoors are assumed to be protected from heat radiation until the building catches fire. The threshold for the ignition of buildings in the TNO 'Purple Book' is set at 35 kW/m² and if the building is set on fire, all the people inside the building are assumed to die (i.e. The probability of fatality indoors is 1 if the heat radiation exceeds 35 kW/m² and it is 0 if the heat radiation is less than 35 kW/m²).

MAE/s Affected:

- All MAEs with a pool fire or jet fire as a potential outcome.

Reference/s:

- TNO, VROM, *Methods for the determination of possible damage*, 'Green Book', CPR16E.
- TNO, VROM, *Guidelines for Quantitative Risk Assessment*, 'Purple Book', CPR18E, 3rd Edition.

Assumption No. 23: Exposure to Flash Fire (Indoor or Outdoor)
<p>Subject: Vulnerability Parameters</p>
<p>Assumption/s:</p> <ul style="list-style-type: none"> • For calculation of location-specific individual risk, the probability for fatality = 1 for any individual located within the flammable cloud (Distance to LFL concentration). • For calculation of societal risk, the probability for fatality for any individual located within the flammable cloud (Distance to LFL concentration) is 1 (outdoor) or 0.1 (indoor).
<p>Justification and Impact/s of Assumption/s:</p> <ul style="list-style-type: none"> • The assumed probabilities differ from the guidance in the TNO 'Purple Book' and the default values in the SAFETI software. In both cases, the probability of fatality is set at 1 for all individuals (outdoor or indoor). This was considered too conservative. The probability of fatality indoors was set at 0.1 to take account of the possibility of open doors / windows and/or failure to evacuate.
<p>MAE/s Affected:</p> <ul style="list-style-type: none"> • All MAEs with a flash fire as a potential outcome.
<p>Reference/s:</p> <ul style="list-style-type: none"> • SAFETI software documentation. • TNO, VROM, <i>Guidelines for Quantitative Risk Assessment</i>, 'Purple Book', CPR18E, 3rd Edition.

Assumption No. 24: Exposure to Explosion Overpressure (Indoor or Outdoor)		
Subject: Vulnerability Parameters		
Assumption/s:		
<ul style="list-style-type: none"> The probability of fatality from exposure to the peak side-on overpressure from an explosion is as shown in Table 19 (Person located outdoors) and Table 20 (Person located indoors). 		
Table 19 Probability of Fatality from Exposure to Peak Side on-Overpressure (Outdoor)		
Overpressure (kPa)	Probability of Fatality	Source
30	1.0	SAFETI software (default value)
Table 20 Probability of Fatality from Exposure to Peak Side on-Overpressure (Indoor)		
Overpressure (kPa)	Probability of Fatality	Source
10	0.025	SAFETI software (default value)
30	1.0	SAFETI software (default value)
Justification and Impact/s of Assumption/s:		
<ul style="list-style-type: none"> When calculating location-specific individual injury or fatality risk contours (peak individual risk), all individuals must be considered to be located outdoors for 100% of the time since this is the underlying basis for the NSW DPI&E’s individual risk criteria. Vulnerability parameters for individuals located indoors are only applicable for the calculation of societal risk. The probability of fatality is higher for an individual located in a conventional building than when outdoors due to the higher chance of harm from collapse of the structure. The NSW DPIE’s injury/damage risk criterion for explosion overpressure is as follows: “Incident explosion overpressure at residential and sensitive use areas should not exceed 7 kPa at frequencies of more than 50 chances in a million per year”. 		
Incidents Affected:		
<ul style="list-style-type: none"> All incidents with a VCE as a potential outcome. 		
Reference/s:		
<ul style="list-style-type: none"> NSW Department of Planning and Infrastructure, Jan 2011, Hazardous Industry Planning Advisory Paper (HIPAP) No. 4, <i>Risk Criteria for Land Use Safety Planning</i>. SAFETI software documentation. Oil & Gas Producers Association (OGP), Risk Assessment Data Directory, Report No. 434-14.1, <i>Vulnerability to Humans</i>, March 2010. Chemical Industries Association (CIA), 2003, <i>Guidance for the location and design of occupied buildings on chemical manufacturing sites</i>, 2nd. ed. 		

Appendix B Consequence Analysis – Example Data and Results

B.1 Representative Hole Diameters

Representative hole diameters were selected for the consequence modelling. These were selected to align with the leak frequency data (Refer to Appendix C), which includes four hole size categories: Pinhole (≤ 25 mm); Small Hole (> 25 mm to ≤ 75 mm), Large Hole (> 75 mm to ≤ 110 mm); and, Rupture (> 110 mm). The representative hole diameter/s in each hole size category were selected based on a review of the following available historical data.

B.1.1 Leak Data for Above Ground or Underground Cross-Country Pipelines – Various Materials

United Kingdom Onshore Pipeline Operators’ Association (UKOPA), Major Accident Hazard Pipelines (1962-2014)

The definition of a Major Accident Hazard Pipeline (MAHP) from the Pipelines Safety Regulations 1996 (PSR 96) includes various materials (e.g. including natural gas at >8 bar, flammable liquids, etc.). The pipeline may be above or below ground.

The failure reports in the UKOPA database include the length and width of the failures. The failure area is also recorded for some events. The equivalent diameter of a circular opening with the same cross-sectional area was calculated.

The following table includes the recorded incidents where the hole size was reported [Cited by HSE in RR1035]. This data is almost exclusively for Natural Gas (NG) leaks, with only one leak from another material (Propylene).

Table 21 Dimensions of Leaks for Above Ground or Underground Cross-Country Natural Gas or Propylene Pipelines (UKOPA - Reported Values Only)

Fault ID	Discovery Date	Product	Wall Thickness (mm)	Diameter (in)	Diameter (mm)	Equivalent Hole Diameter (mm)	Cause
1950	1998	NG	4.4	3.9	100	1.1	Corrosion
1948	1997	NG	4.4	3.9	100	11.3	Corrosion
400	1998	NG	Not Recorded	4	102	2.8	Corrosion
3112	2010	NG	4.4	4.5	114	1.1	Corrosion
1424	1990	NG	4.5	4.5	114	3.6	Corrosion
1998	2001	NG	4.8	5.9	150	24.5	Corrosion
2569	2005	NG	4.7	6.4	163	1.1	Corrosion
2979	2009	NG	4.3	6.4	163	17.8	Corrosion
728	1990	NG	6	6.6	168	1.1	Corrosion
425	2000	NG	6.6	8.6	218	1.1	Corrosion
417	1998	NG	5.2	8.6	218	3.2	Corrosion
402	1999	NG	5.2	8.6	218	3.6	Corrosion
422	1999	NG	6.6	8.6	218	3.6	Corrosion
1934	1993	NG	6.4	14	356	1.1	Corrosion
730	1994	NG	6.4	18	457	1.1	Corrosion
1460	2001	NG	6.35	12.7	323	3.6	Ground movement/Other
1490	1989	NG	6.4	12.8	325	1.1	Ground movement/Other
1489	1989	NG	6.4	12.8	325	3.6	Ground movement/Other
1388	1998	NG	8	18	457	2.3	Ground movement/Other

Fault ID	Discovery Date	Product	Wall Thickness (mm)	Diameter (in)	Diameter (mm)	Equivalent Hole Diameter (mm)	Cause
2923	2008	NG	9.52	18	457	3.4	Ground movement/Other
2872	2000	NG	9.52	18	457	27.8	Ground movement/Other
1972	1990	NG	4.5	3.5	89	3.6	Mechanical
1949	1997	NG	4.4	3.9	100	3.6	Mechanical
1947	1990	NG	4.4	4	102	3.6	Mechanical
1909	1989	NG	4.4	4	102	11.3	Mechanical
1913	1990	NG	4.4	4	102	11.3	Mechanical
1914	1990	NG	4.4	4	102	11.3	Mechanical
1916	1990	NG	4.4	4	102	11.3	Mechanical
1917	1990	NG	4.4	4	102	11.3	Mechanical
1919	1990	NG	4.4	4	102	11.3	Mechanical
363	1997	NG	Not recorded	5.9	150	1.1	Mechanical
1928	1990	NG	4.5	5.9	150	11.3	Mechanical
1973	1990	NG	4.5	5.9	150	11.3	Mechanical
2028	1990	NG	4.8	5.9	150	11.3	Mechanical
2078	1989	NG	5.6	5.9	150	11.3	Mechanical
1996	1993	NG	4.8	6.6	168	1.1	Mechanical
1875	1989	NG	5.2	6.6	168	11.3	Mechanical
1886	1990	NG	4.4	6.6	168	11.3	Mechanical
1887	1990	NG	4.4	6.6	168	11.3	Mechanical
1925	1989	NG	4.4	6.6	168	11.3	Mechanical
1926	1989	NG	4.4	6.6	168	11.3	Mechanical
1940	1990	NG	4.4	6.6	168	11.3	Mechanical
2069	1990	NG	6.4	8.6	218	3.6	Mechanical
1876	1989	NG	6.4	8.6	218	11.3	Mechanical
2055	1989	NG	6.4	8.6	218	11.3	Mechanical
1710	1989	NG	7.9	14	356	3.6	Mechanical
1842	1992	NG	9.5	17.7	450	1.1	Mechanical
1361	1994	NG	9.5	24	610	1.1	Mechanical
1117	1993	NG	12.7	36	914	160.1	Mechanical
1918	1990	NG	4.4	4	102	22.6	TPA
1987	1990	NG	4.8	6.6	168	23.9	TPA
2980	2009	NG	5.56	6.6	168	25	TPA
1645	1992	NG	7.1	8.6	218	5.5	TPA
366	1991	NG	4.8	8.6	218	24	TPA
2783	2006	NG	4.5	8.6	219	25	TPA
1560	1989	NG	6.4	12.8	325	56.2	TPA
1185	1998	NG	10.4	15.7	400	20	TPA
1193	1990	NG	9.5	16	406	25	TPA
3109	2009	Propylene	7.1	6.6	168	6.8	TPA

B.1.2 Leak Data for Underground Cross-Country Pipelines – Natural Gas

US Department of Transportation (DoT), Pipeline and Hazardous Materials Safety Administration (PHMSA), Accident Reports - Reported Data for Underground Natural Gas Steel Pipelines (January 2010 to September 2017)

The dimensions of a leak are not always included in the US DoT database. The following tables include all recorded incidents where the hole size was reported.

The length and width of the hole is reported in the US DoT database; therefore, the equivalent diameter of a circular opening with the same cross-sectional area was calculated.

Table 22 Dimensions of Rupture Events for Underground Natural Gas Steel Pipelines (US DoT - Reported Values Only)

MAOP		Pipe Diameter (in)	Rupture Length (in)	Rupture Width (in)	Approx. Rupture Area (sq.in)	% of Cross-Section Area	Equiv. Hole Diameter (mm)	Cause
(psig)	(kPag)							
15	205	1.66	1.5	1.5	1.8	81.7	38.1	Natural Force - High Winds
95	756	20	16	1	12.6	4.0	101.6	Corrosion - External
15	205	1	3.3	1	2.6	330.0	46.1	Excavation Damage
60	515	1.25	2	0.1	0.2	12.8	11.4	Excavation Damage
60	515	2	7.5	0.5	2.9	93.8	49.2	Material Failure of Pipe or Weld - Butt Weld
60	515	2.375	6.5	2.1	10.7	242.0	93.8	Material Failure of Pipe or Weld - Butt Weld
60	515	2.375	2	2	3.1	70.9	50.8	Excavation Damage
433	3087	4	10	0.2	1.6	12.5	35.9	Excavation Damage
60	515	6.625	12.5	0.5	4.9	14.2	63.5	Material Failure of Pipe or Weld - Pipe
78	639	16	16	16	201.1	100.0	406.4	Other Cause - Unknown

Table 23 Dimensions of Puncture Events for Underground Natural Gas Steel Pipelines (US DoT - Reported Values Only)

MAOP		Pipe Diameter (in)	Puncture Axial Length (in)	Puncture Circumferential Length (in)	Approx. Puncture Area (sq.in)	% of Cross-Section Area	Equiv. Hole Diameter (mm)	Cause
(psig)	(kPag)							
60	515	0.75	0.5	0.5	0.2	44.4	12.7	Other Outside Force - Electrical arcing
260	1894	0.75	0.8	0.8	0.5	113.8	20.3	Excavation Damage
60	515	1.25	1.5	0.7	0.8	67.2	26.0	Excavation Damage
4	129	2	2	1	1.6	50.0	35.9	Excavation Damage
9.5	167	2	1	3	2.4	75.0	44.0	Excavation Damage
25	274	2	3.5	0.7	1.9	61.3	39.8	Incorrect Operation
52	460	2	0.5	0.5	0.2	6.3	12.7	Other Outside Force - Electrical arcing
60	515	2	1	0.5	0.4	12.5	18.0	Excavation Damage
60	515	2	0.5	0.5	0.2	6.3	12.7	Excavation Damage
60	515	2	1.5	0.7	0.8	26.3	26.0	Other Outside Force - Not Specified
35	343	2.375	1	1	0.8	17.7	25.4	Excavation Damage
440	3135	2.375	2.5	0.5	1.0	22.2	28.4	Excavation Damage
60	515	3	3	9.4	22.1	313.3	134.9	Excavation Damage
17	219	4	1.3	1.3	1.3	10.6	33.0	Excavation Damage
30	308	4	6	3	14.1	112.5	107.8	Excavation Damage
35	343	4	2	2	3.1	25.0	50.8	Excavation Damage
35	343	4	3	3	7.1	56.3	76.2	Excavation Damage
57	494	4	5	2	7.9	62.5	80.3	Excavation Damage

MAOP		Pipe Diameter (in)	Puncture Axial Length (in)	Puncture Circumferential Length (in)	Approx. Puncture Area (sq.in)	% of Cross-Section Area	Equiv. Hole Diameter (mm)	Cause
(psig)	(kPag)							
60	515	4	24	2	37.7	300.0	176.0	Excavation Damage
60	515	4	9	3	21.2	168.8	132.0	Excavation Damage
60	515	4	0.8	0.8	0.5	4.0	20.3	Excavation Damage
250	1825	4	5	3	11.8	93.8	98.4	Excavation Damage
285	2066	4	0.6	1.3	0.6	4.9	22.4	Excavation Damage
300	2170	4.5	1	12.6	9.9	62.2	90.2	Excavation Damage
10	170	6	6	6	28.3	100.0	152.4	Excavation Damage
35	343	6	3	3	7.1	25.0	76.2	Excavation Damage
60	515	6	6	6	28.3	100.0	152.4	Excavation Damage
60	515	6	6	6	28.3	100.0	152.4	Excavation Damage
60	515	6	6	6	28.3	100.0	152.4	Excavation Damage
60	515	6	0.5	0.5	0.2	0.7	12.7	Other Outside Force - Electrical arcing
150	1136	6	1.5	0.5	0.6	2.1	22.0	Excavation Damage
200	1480	6	1.2	1	0.9	3.3	27.8	Excavation Damage
200	1480	6	2	2	3.1	11.1	50.8	Excavation Damage
300	2170	6	0.5	0.5	0.2	0.7	12.7	Excavation Damage
400	2859	6	4	1	3.1	11.1	50.8	Excavation Damage
500	3549	6	1	0.5	0.4	1.4	18.0	Other Outside Force - Other Vehicle
60	515	6.58	1	1	0.8	2.3	25.4	Other Outside Force - Other Vehicle
300	2170	6.625	3	4	9.4	27.3	88.0	Excavation Damage
50	446	8	2.1	2.1	3.5	6.9	53.3	Excavation Damage
50	446	8	11	4	34.6	68.8	168.5	Excavation Damage
60	515	8	0.1	0.1	0.0	0.0	2.5	Excavation Damage
80	653	8	12	8	75.4	150.0	248.9	Excavation Damage
120	929	8	6.5	2.5	12.8	25.4	102.4	Excavation Damage
157	1184	8	3.9	3.2	9.8	19.5	89.7	Excavation Damage
300	2170	8	4	2	6.3	12.5	71.8	Excavation Damage
400	2859	8	2	6	9.4	18.8	88.0	Excavation Damage
870	6100	8	25.1	25.1	494.8	984.4	637.5	Excavation Damage
0.43	104	8.625	6	6	28.3	48.4	152.4	Excavation Damage
60	515	8.625	1	1	0.8	1.3	25.4	Other Outside Force - Not Specified
250	1825	8.625	1	5	3.9	6.7	56.8	Excavation Damage
15	205	10	5	5	19.6	25.0	127.0	Excavation Damage
50	446	10	1.5	0.5	0.6	0.8	22.0	Excavation Damage
60	515	10	0.3	13	3.1	3.9	50.2	Excavation Damage
60	515	10	1	3	2.4	3.0	44.0	Excavation Damage
150	1136	10	7.5	1.1	6.5	8.3	73.0	Excavation Damage
240	1756	10	2	2	3.1	4.0	50.8	Excavation Damage
82	667	10.75	3	2	4.7	5.2	62.2	Excavation Damage
33	329	12	11	4	34.6	30.6	168.5	Excavation Damage
60	515	12	3	3	7.1	6.3	76.2	Excavation Damage
100	791	12	2.3	2.5	4.5	4.0	60.9	Excavation Damage
100	791	12	3	3	7.1	6.3	76.2	Excavation Damage
225	1653	12	7	6.3	34.6	30.6	168.7	Excavation Damage

MAOP		Pipe Diameter (in)	Puncture Axial Length (in)	Puncture Circumferential Length (in)	Approx. Puncture Area (sq.in)	% of Cross-Section Area	Equiv. Hole Diameter (mm)	Cause
(psig)	(kPag)							
0.64	106	12.75	2.5	2.5	4.9	3.8	63.5	Other Outside Force - Not Specified
15	205	12.75	6	6	28.3	22.1	152.4	Excavation Damage
170	1273	14	6	3	14.1	9.2	107.8	Other Outside Force - Other Vehicle
58	501	16	2.5	5	9.8	4.9	89.8	Excavation Damage
188	1398	16	4	4	12.6	6.3	101.6	Excavation Damage
300	2170	16	1.1	3.5	3.0	1.5	49.8	Excavation Damage
150	1136	20	5	1	3.9	1.3	56.8	Excavation Damage
400	2859	26	0.2	0.2	0.0	0.0	5.1	Excavation Damage

B.2 Consequence Analysis Results for Representative Release Scenarios

Consequence results from the analysis are presented in the following sections. Some tables refer to a model, and have a coded tag for the model scenario:

AAA-CTR-XXX-BBB Release Scenario Y

AAA- Three letter code for the pipeline – MSE, CTM, or EGP as used in the body of the report.

CTR – Location of the scenario. All results presented are for the analysis of the centre section.

XXX – Hole size, in mm.

BBB – Location of the pipeline breach, TOP (top of pipeline), MID (90° from the top), or FBR (Full Bore Rupture)

Y – The number of the rationalised discharge scenario used for the analysis, determined by SAFETI.

B.2.1 Auto-Sectioning Results

SAFETI 8.23 sections the pipeline based on pressures and the location of valves. Items in **bold** indicate the section that was used in the risk analysis of the central GMGA land release area.

Table 24 Sub-Section Distances for the MSE

Sub-section name	Sub-section type	Sub-section start distance from upstream end [m]	Sub-section end distance from upstream end [m]	Sub-section midpoint distance from upstream end [m]	Sub-section lengths [m]
Section 0 -> Sub-section 0	Automatic	0	3	1.5	3
Section 1 -> Sub-section 0	Automatic	3	1.073E+04	5366	1.073E+04
Section 2 -> Sub-section 0	User-defined	1.073E+04	1.226E+04	1.149E+04	1530
Section 3 -> Sub-section 0	Automatic	1.226E+04	1.813E+04	1.519E+04	5868
Section 4 -> Sub-section 0	Automatic	1.813E+04	3.337E+04	2.575E+04	1.524E+04

Sub-section name	Sub-section type	Sub-section start distance from upstream end [m]	Sub-section end distance from upstream end [m]	Sub-section midpoint distance from upstream end [m]	Sub-section lengths [m]
Section 4 -> Sub-section 1	Automatic	3.337E+04	4.862E+04	4.099E+04	1.524E+04
Section 4 -> Sub-section 2	Automatic	4.862E+04	6.386E+04	5.624E+04	1.524E+04
Section 4 -> Sub-section 3	Automatic	6.386E+04	7.622E+04	7.004E+04	1.236E+04

Table 25 Sub-section Pressures for the MSE

Sub-section name	Pressure at sub-section start [bar]	Pressure at sub-section end [bar]	Pressure at sub-section mid-point [bar]
Section 0 -> Sub-section 0	83.01	83.01	83.01
Section 1 -> Sub-section 0	83.01	82.39	82.7
Section 2 -> Sub-section 0	82.39	82.3	82.34
Section 3 -> Sub-section 0	82.3	81.95	82.13
Section 4 -> Sub-section 0	81.95	81.06	81.51
Section 4 -> Sub-section 1	81.06	80.17	80.62
Section 4 -> Sub-section 2	80.17	79.28	79.73
Section 4 -> Sub-section 3	79.28	78.56	78.92

Table 26 Sub-section Distances for the CTM

Sub-section name	Sub-section type	Sub-section start distances from upstream end [m]	Sub-section end distances from upstream end [m]	Sub-section midpoint distances from upstream end [m]	Sub-section lengths [m]
Section 0 -> Sub-section 0	Automatic	0	5309	2655	5309
Section 0 -> Sub-section 1	Automatic	5309	1.062E+04	7964	5309
Section 1 -> Sub-section 0	User-defined	1.062E+04	1.215E+04	1.138E+04	1531
Section 2 -> Sub-section 0	Automatic	1.215E+04	2.232E+04	1.723E+04	1.017E+04
Section 2 -> Sub-section 1	Automatic	2.232E+04	3.248E+04	2.74E+04	1.017E+04
Section 2 -> Sub-section 2	Automatic	3.248E+04	4.265E+04	3.757E+04	1.017E+04
Section 2 -> Sub-section 3	Automatic	4.265E+04	5.084E+04	4.674E+04	8186

Table 27 Sub-section Pressures for the CTM

Sub-section name	Pressure at sub-section start [bar]	Pressure at sub-section end [bar]	Pressure at sub-section mid-point [bar]
------------------	-------------------------------------	-----------------------------------	---

Section 0 -> Sub-section 0	51.01	50.97	50.99
Section 0 -> Sub-section 1	50.97	50.93	50.95
Section 1 -> Sub-section 0	50.93	50.92	50.92
Section 2 -> Sub-section 0	50.92	50.83	50.87
Section 2 -> Sub-section 1	50.83	50.75	50.79
Section 2 -> Sub-section 2	50.75	50.67	50.71
Section 2 -> Sub-section 3	50.67	50.6	50.63

Table 28 Sub-section Distances for the EGP

Sub-section name	Sub-section type	Sub-section start distances from upstream end [m]	Sub-section end distances from upstream end [m]	Sub-section midpoint distances from upstream end [m]	Sub-section lengths [m]
Section 0 -> Sub-section 0	Automatic	0	1.564E+04	7820	1.564E+04
Section 0 -> Sub-section 1	Automatic	1.564E+04	3.128E+04	2.346E+04	1.564E+04
Section 0 -> Sub-section 2	Automatic	3.128E+04	3.721E+04	3.424E+04	5924
Section 1 -> Sub-section 0	User-defined	3.721E+04	3.874E+04	3.797E+04	1531
Section 2 -> Sub-section 0	Automatic	3.874E+04	5.438E+04	4.656E+04	1.564E+04
Section 2 -> Sub-section 1	Automatic	5.438E+04	7.002E+04	6.22E+04	1.564E+04
Section 2 -> Sub-section 2	Automatic	7.002E+04	7.82E+04	7.411E+04	8186

Table 29 Sub-section pressures for the EGP

Sub-section name	Pressure at sub-section start [bar]	Pressure at sub-section end [bar]	Pressure at sub-section mid-point [bar]
Section 0 -> Sub-section 0	150	149.8	149.9
Section 0 -> Sub-section 1	149.8	149.6	149.7
Section 0 -> Sub-section 2	149.6	149.5	149.6
Section 1 -> Sub-section 0	149.5	149.5	149.5
Section 2 -> Sub-section 0	149.5	149.3	149.4
Section 2 -> Sub-section 1	149.3	149.1	149.2
Section 2 -> Sub-section 2	149.1	149	149.1

B.2.2 Section Breach Discharge Results

Peak discharge rates are shown in the flash fire and jet fire results. It should be noted that for the larger hole sizes (full bore rupture for the natural gas pipelines, and 75 mm or greater for the MSE), the dispersion calculations used multiple release rates to represent the reduction of flowrate over time as the pipelines depressurise.

B.2.3 Flash Fire Results

Results for distances to LFL concentrations are tabulated in Table 30, Table 31, and Table 32 for release from the MSE, CTM and EGP respectively.

Table 30 Distances to LFL for MSE Releases

Model	Weather Category	Peak flowrate (kg/s)	Distance to LFL (m)	Maximum width to LFL (m)
MSE-CTR-010-MID Rationalised Scenario 01	1.0D	3.477	0.3678	0.5292
	1.0F	3.477	0.3477	0.5224
	1.8B	3.477	0.3909	0.5529
	2.6E	3.477	0.3805	0.552
	3.9D	3.477	0.4175	0.5994
	7.5D	3.477	0.4955	0.7054
MSE-CTR-025-MID Rationalised Scenario 01	1.0D	21.73	n/a	n/a
	1.0F	21.73	n/a	n/a
	1.8B	21.73	0.8917	1.201
	2.6E	21.73	0.8416	1.205
	3.9D	21.73	0.8775	1.233
	7.5D	21.73	0.9281	1.293
MSE-CTR-075-MID Rationalised Scenario 05	1.0D	96.78	n/a	n/a
	1.0F	96.78	1.898	1.69
	1.8B	96.78	1.33	1.716
	2.6E	96.78	1.472	1.725
	3.9D	96.78	1.355	1.76
	7.5D	96.78	1.409	1.836
MSE-CTR-075-TOP Rationalised Scenario 05	1.0D	96.78	0.6604	0.6998
	1.0F	96.78	0.6676	0.6986
	1.8B	96.78	0.6489	0.7005
	2.6E	96.78	0.6217	0.7036
	3.9D	96.78	0.7114	0.7093
	7.5D	96.78	0.6415	0.7231
MSE-CTR-110-MID Rationalised Scenario 05	1.0D	208.2	n/a	n/a
	1.0F	208.2	1.74	1.854
	1.8B	208.2	1.526	1.879
	2.6E	208.2	1.698	1.889
	3.9D	208.2	1.563	1.923
	7.5D	208.2	1.618	1.996
MSE-CTR-110-TOP Rationalised Scenario 05	1.0D	208.2	0.8215	0.8695
	1.0F	208.2	0.9504	0.8687
	1.8B	208.2	0.8828	0.8679
	2.6E	208.2	0.902	0.8717
	3.9D	208.2	0.9806	0.8752
	7.5D	208.2	0.7892	0.8872
	1.0D	709	265.6	204.9

Model	Weather Category	Peak flowrate (kg/s)	Distance to LFL (m)	Maximum width to LFL (m)
MSE-CTR-203-FBR Rationalised Scenario 05	1.0F	709	291.1	138.5
	1.8B	709	64.07	43.37
	2.6E	709	7.368	7.739
	3.9D	709	5.67	7.797
	7.5D	709	5.53	7.824

Table 31 Distances to LFL for CTM Releases

Model	Weather	Peak observer rate (kg/s)	Distance to LFL (m)	Maximum width to LFL (m)
CTM-CTR-010-MID Rationalised Scenario 01	1.0D	0.6415	0.2252	0.4412
	1.0F	0.6415	0.2066	0.4321
	1.8B	0.6415	0.2441	0.4699
	2.6E	0.6415	0.2343	0.4699
	3.9D	0.6415	0.273	0.5106
	7.5D	0.6415	0.3566	0.6009
CTM-CTR-025-MID Rationalised Scenario 01	1.0D	4.01	0.4455	0.8793
	1.0F	4.01	0.408	0.8703
	1.8B	4.01	0.4635	0.9098
	2.6E	4.01	0.4394	0.909
	3.9D	4.01	0.4853	0.9469
	7.5D	4.01	0.5467	1.028
CTM-CTR-075-MID Rationalised Scenario 01	1.0D	36.09	1.062	2.063
	1.0F	36.09	1.279	2.055
	1.8B	36.09	1.102	2.095
	2.6E	36.09	1.132	2.093
	3.9D	36.09	1.109	2.123
	7.5D	36.09	1.163	2.181
CTM-CTR-075-TOP Rationalised Scenario 01	1.0D	36.09	0.4266	0.8832
	1.0F	36.09	0.4677	0.8808
	1.8B	36.09	0.4568	0.889
	2.6E	36.09	0.4522	0.8912
	3.9D	36.09	0.4596	0.8998
	7.5D	36.09	0.4846	0.9179
CTM-CTR-110-MID Rationalised Scenario 01	1.0D	77.63	1.319	2.55
	1.0F	77.63	1.462	2.543
	1.8B	77.63	1.342	2.58
	2.6E	77.63	1.35	2.578
	3.9D	77.63	1.356	2.602
	7.5D	77.63	1.363	2.647
CTM-CTR-110-TOP Rationalised Scenario 01	1.0D	77.63	0.5357	1.034
	1.0F	77.63	0.5089	1.032
	1.8B	77.63	0.5385	1.036

Model	Weather	Peak observer rate (kg/s)	Distance to LFL (m)	Maximum width to LFL (m)
	2.6E	77.63	0.5406	1.04
	3.9D	77.63	0.5538	1.045
	7.5D	77.63	0.5469	1.059
CTM-CTR-837-FBR Rationalised Scenario 02	1.0D	3050	6.247	11.99
	1.0F	3050	n/a	n/a
	1.8B	3050	6.645	12.02
	2.6E	3050	6.253	12.04
	3.9D	3050	6.246	12.07
	7.5D	3050	6.257	12.08

Table 32 Distances to LFL for EGP Releases

Model	Weather	Peak flow rate (kg/s)	Distance to LFL (m)	Maximum width (at height of interest) to LFL (m)
EGP-CTR-010-MID Rationalised Scenario 01	1.0D	2.111	0.3413	0.6701
	1.0F	2.111	0.3118	0.6604
	1.8B	2.111	0.3631	0.7013
	2.6E	2.111	0.3462	0.7011
	3.9D	2.111	0.3885	0.7423
	7.5D	2.111	0.4546	0.8316
EGP-CTR-025-MID Rationalised Scenario 01	1.0D	13.19	0.6796	1.327
	1.0F	13.19	0.649	1.318
	1.8B	13.19	0.7003	1.356
	2.6E	13.19	0.6608	1.356
	3.9D	13.19	0.7112	1.389
	7.5D	13.19	0.7623	1.453
EGP-CTR-075-MID Rationalised Scenario 01	1.0D	118.7	1.057	1.924
	1.0F	118.7	1.328	1.921
	1.8B	118.7	1.072	1.929
	2.6E	118.7	1.019	1.936
	3.9D	118.7	1.086	1.946
	7.5D	118.7	1.1	1.961
EGP-CTR-075-TOP Rationalised Scenario 01	1.0D	118.7	0.5156	0.9258
	1.0F	118.7	0.528	0.9269
	1.8B	118.7	0.551	0.9109
	2.6E	118.7	0.5308	0.9217
	3.9D	118.7	0.5634	0.9209
	7.5D	118.7	0.5912	0.9251
EGP-CTR-110-MID Rationalised Scenario 01	1.0D	255.4	1.226	2.202
	1.0F	255.4	1.37	2.2
	1.8B	255.4	1.271	2.195
	2.6E	255.4	1.253	2.206

Model	Weather	Peak flow rate (kg/s)	Distance to LFL (m)	Maximum width (at height of interest) to LFL (m)
	3.9D	255.4	1.222	2.21
	7.5D	255.4	1.299	2.215
EGP-CTR-110-TOP Rationalised Scenario 01	1.0D	255.4	0.7155	1.282
	1.0F	255.4	1.1	1.284
	1.8B	255.4	0.7292	1.259
	2.6E	255.4	0.8538	1.274
	3.9D	255.4	0.7782	1.27
	7.5D	255.4	0.8236	1.27
EGP-CTR-434-FBR Rationalised Scenario 03	1.0D	2117	5.51	10.67
	1.0F	2117	n/a	
	1.8B	2117	5.821	10.71
	2.6E	2117	5.615	10.72
	3.9D	2117	5.585	10.74
	7.5D	2117	5.576	10.77

B.2.4 Jet Fire Results

Results for jet fire scenarios are tabulated in Table 33, Table 34, and Table 35 for releases from the MSE, CTM and EGP respectively.

Table 33 Distances (m) Downwind to Selected Radiation Intensity for MSE Releases

Model	Weather Category	Jet fire mass rate (kg/s)	Flame length (m)	4.7 kW/m ² (m)	12.5 kW/m ² (m)	23 kW/m ² (m)	35 kW/m ² (m)
MSE-CTR-010-MID Rationalised Scenario 01	1.8B	3.477	22.07	32.75	19.97	10.1	4.67
	7.5D	3.477	15.41	36.44	25.9	20.91	17.41
	3.9D	3.477	17.85	35.06	22.85	18.23	14.51
	1.0D	3.477	24.87	30.34	12.75	3.936	2.132
	2.6E	3.477	20.04	33.1	22.16	15.28	8.745
	1.0F	3.477	24.87	30.37	12.76	3.943	2.134
MSE-CTR-025-MID Rationalised Scenario 01	1.8B	21.73	47.27	76.4	46.63	26.33	12.84
	7.5D	21.73	33	61.69	32.33	18.73	11.32
	3.9D	21.73	38.24	80.07	51.88	40.46	31.77
	1.0D	21.73	53.27	72.18	33.82	11.62	5.646
	2.6E	21.73	42.92	77.06	50.61	35.17	21.99
	1.0F	21.73	53.27	72.27	33.9	11.65	5.658
MSE-CTR-075-MID Rationalised Scenario 05	1.8B	91.97	82.82	144.5	85.33	48.33	23.68
	7.5D	91.97	57.82	142.8	93.65	72.15	62.09
	3.9D	91.97	67	149.9	97.46	74.54	58.23
	1.0D	91.97	93.33	136.4	65.17	22.04	9.26
	2.6E	91.97	75.2	146.7	94.62	65.54	42.58
	1.0F	91.97	93.33	136.6	65.34	22.13	9.288

Model	Weather Category	Jet fire mass rate (kg/s)	Flame length (m)	4.7 kW/m ² (m)	12.5 kW/m ² (m)	23 kW/m ² (m)	35 kW/m ² (m)
MSE-CTR-075-TOP Rationalised Scenario 05	1.8B	91.97	75.15	125.4	66.13	27.17	8.797
	7.5D	91.97	52.47	121.8	78.32	61.76	51.12
	3.9D	91.97	60.79	118.9	75.01	49.91	29.95
	1.0D	91.97	84.68	121.7	52.48	10.76	3.297
	2.6E	91.97	68.23	123.3	71.09	38.74	15.67
	1.0F	91.97	84.68	121.9	52.64	10.82	3.307
MSE-CTR-110-MID Rationalised Scenario 05	1.8B	173.8	105.9	190.3	110.7	62.35	29.35
	7.5D	173.8	73.94	178.5	115	90.42	76.33
	3.9D	173.8	85.67	183.5	120.6	89.96	67.44
	1.0D	173.8	119.3	180.5	87.34	29.85	11.51
	2.6E	173.8	96.15	192.1	122	82.85	52.8
	1.0F	173.8	119.3	180.8	87.57	30	11.55
MSE-CTR-110-TOP Rationalised Scenario 05	1.8B	173.8	97.9	159	81.79	30.89	10.02
	7.5D	173.8	68.35	154.3	99.68	77.93	62.94
	3.9D	173.8	79.2	151.7	94.05	60.4	33.2
	1.0D	173.8	110.3	161	70.81	15.3	4.661
	2.6E	173.8	88.89	156.6	88.46	45.47	17.54
	1.0F	173.8	110.3	161.3	71.04	15.39	4.675
MSE-CTR-203-FBR Rationalised Scenario 05	1.8B	286.1	140.9	255	159.5	103.5	63.77
	7.5D	286.1	98.35	225.1	146.5	115.8	97.49
	3.9D	286.1	114	255.5	166.4	127.5	37.86
	1.0D	286.1	158.7	250.3	138.9	71.22	37.72
	2.6E	286.1	127.9	256.6	167.7	120.4	85.61
	1.0F	286.1	158.7	250.7	139.2	71.46	37.83

Table 34 Distances (m) Downwind to Selected Radiation Intensity for CTM Releases

Model	Weather Category	Jet fire mass rate (kg/s)	Flame length (m)	4.7 kW/m ² (m)	12.5 kW/m ² (m)	23 kW/m ² (m)	35 kW/m ² (m)
CTM-CTR-010-MID Rationalised Scenario 01	1.8B	0.6415	13.44	12.35	3.209	0.333	n/a
	7.5D	0.6415	9.39	16.89	12.2	9.769	8.942
	3.9D	0.6415	10.84	14.68	10.03	5.105	1.655
	1.0D	0.6415	14.97	8.384	n/a	n/a	n/a
	2.6E	0.6415	12.12	14.07	6.908	1.958	0.4879
	1.0F	0.6415	14.95	8.427	n/a	n/a	n/a
CTM-CTR-025-MID Rationalised Scenario 01	1.8B	4.01	29	29.24	9.03	1.547	n/a
	7.5D	4.01	20.27	37.63	24.8	20.51	17.02
	3.9D	4.01	23.4	33.57	21.83	11.29	3.895
	1.0D	4.01	32.32	22.2	3.463	n/a	n/a
	2.6E	4.01	26.18	32.45	16.47	5.401	1.59
	1.0F	4.01	32.27	22.29	3.558	n/a	n/a

Model	Weather Category	Jet fire mass rate (kg/s)	Flame length (m)	4.7 kW/m ² (m)	12.5 kW/m ² (m)	23 kW/m ² (m)	35 kW/m ² (m)
CTM-CTR-075-MID Rationalised Scenario 01	1.8B	36.09	70.99	79.5	28.39	9.567	n/a
	7.5D	36.09	49.61	97.54	63.41	50.09	39.03
	3.9D	36.09	57.28	89.59	56.37	32.92	15.54
	1.0D	36.09	79.12	66.43	17.89	n/a	n/a
	2.6E	36.09	64.07	86.83	45.16	17.85	7.481
	1.0F	36.09	79	66.66	18.19	n/a	n/a
CTM-CTR-075-TOP Rationalised Scenario 01	1.8B	36.09	59.87	58.13	14.56	n/a	n/a
	7.5D	36.09	41.84	74.92	47.38	30.96	16.78
	3.9D	36.09	48.3	70.17	34.39	11.7	n/a
	1.0D	36.09	66.7	49.57	n/a	n/a	n/a
	2.6E	36.09	54.03	64.79	22.81	n/a	n/a
	1.0F	36.09	66.6	49.77	n/a	n/a	n/a
CTM-CTR-110-MID Rationalised Scenario 01	1.8B	77.63	95.39	109.6	39.33	13.81	n/a
	7.5D	77.63	66.67	133.8	86.74	67.31	51.35
	3.9D	77.63	76.97	124.8	76.76	45.83	23.83
	1.0D	77.63	106.3	94.25	27.75	n/a	n/a
	2.6E	77.63	86.09	119.2	60.08	21	10.55
	1.0F	77.63	106.1	94.58	27.97	n/a	n/a
CTM-CTR-110-TOP Rationalised Scenario 01	1.8B	77.63	79.66	78.01	19.91	n/a	n/a
	7.5D	77.63	55.67	100.5	61.03	37.26	15.08
	3.9D	77.63	64.27	93.41	43.96	15.79	n/a
	1.0D	77.63	88.74	67.95	n/a	n/a	n/a
	2.6E	77.63	71.88	86.4	31.28	n/a	n/a
	1.0F	77.63	88.61	68.23	n/a	n/a	n/a
CTM-CTR-837-FBR Rationalised Scenario 02	1.8B	3050	424.6	582.3	275.5	137.4	58.82
	7.5D	3050	296.7	611.7	400.7	291.3	213.3
	3.9D	3050	342.6	639.8	381.6	239.1	139.8
	1.0D	3050	473.2	541.4	232.1	84.86	n/a
	2.6E	3050	383.2	615.2	329.2	171.6	101.9
	1.0F	3050	472.5	543.3	233.5	86.38	n/a

Table 35 Distances (m) Downwind to Selected Radiation Intensity for EGP Releases

Model	Weather Category	Jet fire mass rate (kg/s)	Flame length (m)	4.7 kW/m ² (m)	12.5 kW/m ² (m)	23 kW/m ² (m)	35 kW/m ² (m)
EGP-CTR-010-MID Rationalised Scenario 01	1.0D	2.111	24.91	16.11	1.025	n/a	n/a
	1.0F	2.111	24.88	16.18	1.095	n/a	n/a
	1.8B	2.111	22.36	22.02	6.733	1.182	n/a
	2.6E	2.111	20.18	24.41	12.24	3.608	0.9457
	3.9D	2.111	18.04	25.29	16.74	8.587	2.992
	7.5D	2.111	15.62	28.58	19.46	15.95	13.68

Model	Weather Category	Jet fire mass rate (kg/s)	Flame length (m)	4.7 kW/m ² (m)	12.5 kW/m ² (m)	23 kW/m ² (m)	35 kW/m ² (m)
EGP-CTR-025-MID Rationalised Scenario 01	1.0D	13.19	52.71	40.58	9.262	n/a	n/a
	1.0F	13.19	52.63	40.73	9.347	n/a	n/a
	1.8B	13.19	47.3	50.55	17.2	4.947	n/a
	2.6E	13.19	42.69	55.68	29.06	11.13	3.882
	3.9D	13.19	38.16	57.29	36.57	20.17	7.93
	7.5D	13.19	33.06	63.17	41.31	33.25	26.48
EGP-CTR-075-MID Rationalised Scenario 01	1.0D	118.7	120	106.1	28.52	n/a	n/a
	1.0F	118.7	119.8	106.5	28.89	n/a	n/a
	1.8B	118.7	107.7	121.4	43.49	n/a	n/a
	2.6E	118.7	97.17	132.1	59.81	22.75	n/a
	3.9D	118.7	86.87	140	78.98	39.99	17
	7.5D	118.7	75.25	149.4	97.13	72.18	52.26
EGP-CTR-075-TOP Rationalised Scenario 01	1.0D	118.7	105.7	83.42	n/a	n/a	n/a
	1.0F	118.7	105.5	83.76	n/a	n/a	n/a
	1.8B	118.7	94.88	94.78	25.84	n/a	n/a
	2.6E	118.7	85.61	104.5	39.06	n/a	n/a
	3.9D	118.7	76.54	112.6	53.31	19.92	n/a
	7.5D	118.7	66.31	121.1	73.01	44.33	18.12
EGP-CTR-110-MID Rationalised Scenario 01	1.0D	255.4	160.2	147.7	40.7	n/a	n/a
	1.0F	255.4	159.9	148.2	41.21	n/a	n/a
	1.8B	255.4	143.7	165	61.78	n/a	n/a
	2.6E	255.4	129.7	178.3	79.48	31.99	n/a
	3.9D	255.4	116	189	103.3	48.59	23.8
	7.5D	255.4	100.4	198.6	128.4	90.82	62.4
EGP-CTR-110-TOP Rationalised Scenario 01	1.0D	255.4	146.8	123.7	n/a	n/a	n/a
	1.0F	255.4	146.6	124.2	n/a	n/a	n/a
	1.8B	255.4	131.8	138.2	43.63	n/a	n/a
	2.6E	255.4	118.9	150.8	60.39	n/a	n/a
	3.9D	255.4	106.3	161.3	78.76	33.04	n/a
	7.5D	255.4	92.09	173.1	104.3	64.47	30.66
EGP-CTR-434-FBR Rationalised Scenario 03	1.0D	2117	411.4	464.1	196.1	71.29	n/a
	1.0F	2117	410.8	465.7	197.2	72.56	n/a
	1.8B	2117	369.1	502.3	233.9	116.1	51.63
	2.6E	2117	333.1	531.4	286.4	144.6	86.11
	3.9D	2117	297.8	552.4	333	212	128.1
	7.5D	2117	258	535.1	352.6	259.8	192.4

B.2.5 Explosion Results

Explosion results are tabulated in Table 36, Table 37, and Table 38 for releases from the MSE, CTM and EGP, respectively. The maximum calculated overpressure was less than 14 kPa, so only distances for 7 kPa are shown.

Table 36 Explosion Distances for MSE Releases

Model	Weather Category	Distance downwind to 7 kPa (m)	Max diameter (m)	Explosion centre (m)
MSE-CTR-025-MID Rationalised Scenario 01	1.0D	31.56	53.25	4.932
	1.0F	30.33	50.61	5.026
	2.6E	23.93	39.8	4.032
	3.9D	22.57	37.3	3.917
MSE-CTR-075-MID Rationalised Scenario 05	1.0D	56.31	95.06	8.778
	1.0F	54.22	89.13	9.657
	1.8B	29.59	53.08	3.055
	2.6E	46.36	75.74	8.487
	3.9D	43.34	70.74	7.972
MSE-CTR-075-TOP Rationalised Scenario 05	7.5D	35.61	59.13	6.042
	1.0D	26.76	47.19	3.169
	1.0F	29.8	51.42	4.091
	1.8B	26.54	46.13	3.481
	2.6E	27.62	47.52	3.853
	3.9D	29.35	49.6	4.552
MSE-CTR-110-MID Rationalised Scenario 05	7.5D	31.13	50.69	5.783
	1.0D	80.02	134	13.04
	1.0F	74.28	120.5	14.04
	1.8B	58.22	98.4	9.019
	2.6E	55.1	92.38	8.911
	3.9D	50.66	85.18	8.067
MSE-CTR-110-TOP Rationalised Scenario 05	7.5D	50.34	82.42	9.129
	1.0D	28.84	52.8	2.438
	1.0F	28.86	52.29	2.714
	1.8B	24.48	44.75	2.1
	2.6E	34.66	60.69	4.314
	3.9D	37.65	64.82	5.239
MSE-CTR-203-FBR Rationalised Scenario 05	7.5D	43.71	71.69	7.863
	1.0D	339.1	401	138.6
	1.0F	323.2	378.7	133.9
	1.8B	134.5	239.1	14.95
	2.6E	159.7	256.6	31.36
	3.9D	148.7	241.7	27.79
MSE-CTR-203-FBR Rationalised Scenario 05	7.5D	107	177.8	18.14

Table 37 Explosion Distances for CTM Releases

Model	Weather Category	Distance downwind to 7 kPa (m)	Max diameter (m)	Explosion centre (m)
CTM-CTR-110-MID Rationalised Scenario 01	1.0D	25.05	43.66	3.221
	2.6E	26.17	44.84	3.747
	3.9D	26.76	45.41	4.054
	7.5D	27.91	46.02	4.896
CTM-CTR-837-FBR Rationalised Scenario 01	1.0D	123	216.3	14.86
	1.0F	1298	718.5	938.8
	1.8B	96.26	174.3	9.123
	2.6E	154.1	255.5	26.33
	3.9D	161.2	264.2	29.07
	7.5D	155	251.4	29.32
CTM-CTR-837-FBR Rationalised Scenario 02	1.0D	122.9	216.2	14.84
	1.0F	1308	698	959.4
	1.8B	96.16	174.1	9.111
	2.6E	154	255.4	26.33
	3.9D	161.2	264.2	29.06
	7.5D	154.9	251.3	29.26

Table 38 Explosion Distances for EGP Releases

Model	Weather Category	Distance downwind to 7 kPa (m)	Max diameter (m)	Explosion centre (m)
EGP-CTR-075-MID Rationalised Scenario 01	1.0D	24.9	44.09	2.858
	1.0F	29.65	50.86	4.218
	1.8B	25.33	44.17	3.25
	2.6E	26.92	46.6	3.622
	3.9D	29.63	50.01	4.632
	7.5D	31.3	51.22	5.685
EGP-CTR-110-MID Rationalised Scenario 01	1.0D	22.52	41.69	1.673
	1.0F	25.27	46.24	2.152
	1.8B	25.77	46.8	2.368
	2.6E	33.6	58.77	4.212
	3.9D	36.67	62.88	5.235
	7.5D	42.09	69.06	7.559
EGP-CTR-434-FBR Rationalised Scenario 03	1.0D	91.9	165.8	8.981
	1.0F	1320	722.9	958.6
	1.8B	100.2	177.1	11.63
	2.6E	130.6	218.2	21.49
	3.9D	141.3	231.4	25.61
	7.5D	134.5	218.3	25.4

Appendix C Likelihood Analysis - Data and Results

C.1 Likelihood of Release from Underground Pipelines

The likelihood of a release (i.e. leak) from each underground pipeline was estimated based on a review of relevant data sources. The primary data sources included:

- Department of Industry, Resources and Energy, New South Wales, *2017-18 Licensed Pipelines Performance Report*. This includes data for all licensed pipelines in NSW for the 5-year period: 2013/14 to 2017/18; and
- UK Health and Safety Executive (HSE), 2015, *Update of Pipeline Failure Rates for Land Use Planning Assessments*, Research Report (RR) 1035.
- British Standards Institute, 2013, *Pipeline Systems – Part 3: Steel Pipelines on Land – Guide to the Application of Pipeline Risk Assessment to Proposed Developments in the Vicinity of Major Accident Hazard Pipelines Containing Flammables – Supplement to PD 8010-1:2004, PD 8010-3:2009+A1:2013*.
- US Department of Transportation (DoT), Pipeline and Hazardous Materials Safety Administration (PHMSA), *Accident Reports - Hazardous Liquid Pipeline Systems* (January 2010 to September 2018).

The leak frequency data reported in RR1035 was adopted for the QRA as it is comparable to the NSW performance data and it includes the leak frequency for four hole size categories (pinhole, small hole, large hole and rupture), four failure mode categories (mechanical failure, corrosion, ground movement / other and third party activity), and in some cases for varying pipe diameters and / or wall thicknesses.

The leak frequency data derived from the British Standards Institute PD 8010-3:2009+A1:2013 was not used since the leak rates (other than ruptures) are not clearly defined for all failure modes and the UK HSE does not accept the use of zero frequencies. Also, the rupture frequencies are disproportionately higher than for other hole sizes (unless factored down to account for concrete slab protection), which is not consistent with other data sources.

The leak frequency data reported in RR1035 has been based on:

- An analysis of pipeline failure data from multiple organisations, including:
 - CONCAWE (CONservation of Clean Air and Water in Europe);
 - UKOPA (United Kingdom Onshore Pipeline Operators' Association); and
 - EGIG (European Gas pipeline Incident Group).
- A conservative, yet realistic, analysis of the available data. For example:
 - For failure mode categories where zero failures have occurred, assumptions have been made to estimate the chance of a failure, even if not seen historically (over the observation period).
 - Only the most recent 22 years of historical incident data was analysed to ensure a consistent pipeline population and to remove the older incident data, which may not be as representative of current practice.
 - Incident data for pipelines carrying products at elevated temperatures was excluded from the analysis.

- Although the location of failures (e.g. rural or urban) may be recorded in the various databases, it is recognised that there is insufficient data to estimate the leak frequency for different locations.
- The recommended failure rates for specific materials have been derived from the most appropriate dataset (e.g. for a specific substance the failure rates for corrosion may be derived from the CONCAWE products dataset, whilst the mechanical failure rates may be derived from the UKOPA dataset).

C.1.1 Ethane

NSW Performance Report

The average leak frequency from the 2018 NSW Performance Report for all licensed pipelines in NSW for the 5-year period 2013/14 to 2017/18 is 8.2E-05 per km per year.

UK HSE (RR1035)

There is no leak frequency data specifically for Ethane in RR1035. The data for natural gas (methane), ethylene and LPG (propane and butane) was reviewed. The data for LPG was selected as it is slightly more conservative for the larger leak diameters and is more applicable for a liquefied gas.

The total leak frequency data reported in Section 7.6 of RR1035 for underground LPG pipelines is slightly more conservative (e.g. 2.1E-04 per km per year for a pipeline with wall thickness ≥ 5 mm to < 10 mm) and was adopted in the QRA for the underground HP Ethane pipeline (Refer to Table 39).

Table 39 Leak Frequencies for Underground LPG Pipelines

Failure Mode	Pipeline Diameter (mm)	Wall Thickness (mm)	Leak Frequency (per km per yr)				Total Leak Frequency
			Pinhole (≤ 25 mm)	Small Hole (> 25 mm to ≤ 75 mm)	Large Hole (> 75 mm to ≤ 110 mm)	Rupture (> 110 mm)	
Mechanical Failure	All	All	5.7E-05	1.3E-05	6.7E-06	8.3E-06	8.5E-05
Corrosion	All	< 5	1.6E-04	8.9E-07	4.5E-07	1.3E-06	1.6E-04
		5 to < 10	8.4E-05	2.4E-07	4.8E-07	7.3E-07	8.6E-05
		10 to < 15	4.5E-06	1.3E-08	2.6E-08	3.9E-08	4.6E-06
		≥ 15	4.3E-07	1.2E-09	2.5E-09	3.7E-09	4.4E-07
Ground Movement / Other	All	All	1.2E-05	2.5E-06	1.5E-07	2.5E-06	1.7E-05
TPA	All	All	2.2E-05	2.4E-06	1.0E-07	1.0E-07	2.5E-05
Total Leak Freq. =	All	5 to < 10	1.7E-04	1.8E-05	7.4E-06	1.2E-05	2.1E-04
% =			82.4	8.7	3.5	5.5	

British Standards Institute (PD 8010-3:2009+A1:2013)

The data and approach included in Annex B of PD 8010-3:2009+A1:2013 was used to estimate the leak frequencies for the Moomba to Sydney Ethane Pipeline (Refer to Table 40). The data applicable for a pipeline with a wall thickness of 8.1 mm, manufactured after 1980, was used.

Leak frequency data is not reported for internal corrosion; therefore, the total leak frequencies reported in Table 40 may be underestimated.

For leaks or ruptures due to ‘Ground Movement / Other’, the landslide potential in the study area was assumed to be “low to nil” in accordance with the description in Table B.15 of PD 8010-3:2009+A1:2013.

For leaks (other than ruptures) due to ‘Ground Movement / Other’, the estimated leak frequency was assumed to be distributed evenly across the other hole sizes (Note: There is no guidance in PD 8010-3:2009+A1:2013 on how to distribute the non-rupture events).

For leaks (other than ruptures) due to ‘TPA’, the estimated leak frequency was assumed to be distributed across the smaller hole sizes and weighted to the smaller hole size categories (Note: There is no guidance in PD 8010-3:2009+A1:2013 on how to distribute the non-rupture events).

The rupture frequency due to ‘TPA’ was derived from the generic pipeline failure frequency, which was modified in accordance with the relevant parameters for the Moomba to Sydney Ethane Pipeline (i.e. location, design factor, wall thickness and depth of cover). As this pipeline has concrete slab protection and marker tapes, the base rupture frequency was reduced by a factor of 0.125 (Table A.0, p.31).

Table 40 Approx. Leak Frequencies for Underground Ethane Pipeline

Failure Mode	Approx. Leak Frequency (per km per yr)				Total Leak Frequency
	Pinhole (≤ 25 mm)	Small Hole (> 25 mm to ≤ 75 mm)	Large Hole (> 75 mm to ≤ 110 mm)	Rupture (> 110 mm)	
Mechanical Failure	8.0E-06	3.2E-06	0.0E+00	0.0E+00	1.1E-05
Corrosion	3.2E-05	1.1E-05	3.0E-06	0.0E+00	4.6E-05
Ground Movement / Other	4.9E-07	4.9E-07	4.9E-07	6.6E-08	1.5E-06
TPA	6.1E-06	4.0E-06	2.0E-06	8.1E-06	2.0E-05
Total Leak Freq. =	4.7E-05	1.9E-05	5.5E-06	8.1E-06	7.9E-05
% =	59.0	23.7	7.0	10.3	

US Department of Transportation (DoT)

The US Department of Transportation (DoT), Pipeline and Hazardous Materials Safety Administration (PHMSA), Accident Reports - Hazardous Liquid Pipeline Systems (January 2010 to September 2018) include incidents for Ethane pipelines; however, the total length of the Ethane pipelines is not available (i.e. it is not possible to determine the leak rate per km.year).

To enable a comparison with the UK data, the data for all Highly Volatile Liquids (Except Ammonia) was analysed and the leaks categorised using the same representative hole sizes as reported in the UK (i.e. RR1035 and PD8010). The results are reported in Table 41.

Period of Recorded Incident Data = 8.75 years (Jan 2010 to Sept 2018)
 Total Length of All HVL Pipelines = 102663 km Note: Average for 2010 to 2017 for ALL HVLs

Table 41 Leak Frequencies for Underground HVL Pipelines (Excluding Ammonia)

Failure Mode	Approx. Leak Frequency (per km per yr)					Comments
	Pinhole (≤ 25 mm)	Small Hole (> 25 mm to ≤ 75 mm)	Large Hole (> 75 mm to ≤ 110 mm)	Rupture (> 110 mm)	Total Leak Frequency	
Mechanical Failure	3.9E-05	0.0E+00	0.0E+00	0.0E+00	3.9E-05	Excludes pipelines manufactured prior to 1980.
Corrosion	5.6E-06	0.0E+00	0.0E+00	1.1E-06	6.7E-06	Excludes external corrosion (other than SCC).
Ground Movement / Other	5.6E-06	2.2E-06	1.1E-06	5.6E-06	1.4E-05	
TPA	8.9E-06	6.7E-06	2.2E-06	8.9E-06	2.7E-05	
Total Leak Freq. =	5.9E-05	8.9E-06	3.3E-06	1.6E-05	8.7E-05	
% =	67.9	10.3	3.8	17.9		

C.1.2 Natural Gas

NSW Performance Report

The average leak frequency from the 2018 NSW Performance Report for all licensed pipelines in NSW for the 5-year period 2013/14 to 2017/18 is 8.2E-05 per km per year.

UK HSE (RR1035)

The total leak frequency data reported in Section 7.1 of RR1035 for underground natural gas pipelines (e.g. 5.1E-05 per km per year for a ≥ 305 mm diameter pipeline with wall thickness ≥ 10 mm) is very comparable the average leak frequency from the 2018 NSW Performance Report and was adopted in the risk analysis for the HP Natural Gas pipelines (Refer to Table 42).

Table 42 Leak Frequencies for Underground Natural Gas Pipelines

Failure Mode	Pipeline Diameter (mm)	Wall Thickness (mm)	Leak Frequency (per km per yr)				Total Leak Frequency
			Pinhole (≤ 25 mm)	Small Hole (> 25 mm to ≤ 75 mm)	Large Hole (> 75 mm to ≤ 110 mm)	Rupture (> 110 mm)	
Mechanical Failure	< 115	All	4.5E-04	1.0E-08	1.0E-08	1.0E-08	4.5E-04
	127 to < 273		1.5E-04	1.0E-08	1.0E-08	1.0E-08	1.5E-04
	≥ 305		8.7E-06	1.0E-08	1.0E-08	1.0E-08	8.7E-06
Corrosion	All	< 5	3.1E-04	1.0E-08	1.0E-08	1.0E-08	3.1E-04
		5 to < 10	3.3E-05	1.0E-08	1.0E-08	1.0E-08	3.3E-05
		≥ 10	1.0E-07	1.0E-08	1.0E-08	1.0E-08	1.3E-07
Ground Movement / Other	All	All	1.2E-05	2.5E-06	1.5E-07	2.5E-06	1.7E-05

Failure Mode	Pipeline Diameter (mm)	Wall Thickness (mm)	Leak Frequency (per km per yr)				Total Leak Frequency
			Pinhole (≤ 25 mm)	Small Hole (> 25 mm to ≤ 75 mm)	Large Hole (> 75 mm to ≤ 110 mm)	Rupture (> 110 mm)	
TPA	All	All	2.2E-05	2.4E-06	1.0E-07	1.0E-07	2.5E-05
Total Leak Frequency =	≥ 305	≥ 10	4.3E-05	4.9E-06	2.7E-07	2.6E-06	5.1E-05
% =			84.6	9.7	0.5	5.2	

British Standards Institute (PD 8010-3:2009+A1:2013)

The data and approach included in Annex B of PD 8010-3:2009+A1:2013 was used to estimate the leak frequencies for the HP Natural Gas Pipelines (Refer to Table 43 and Table 44). The data applicable for pipelines with a wall thickness > 10 mm to ≤ 15 mm was used.

The Jemena Gas Network pipeline was constructed prior to 1980, so the leak frequencies due to material and construction defects (mechanical failures) were not reduced by a factor of 5 for this pipeline (as per Section B.7 of PD 8010-3:2009+A1:2013).

The leak frequency for external corrosion is reported to be 0 for pipelines with a wall thickness > 10 mm to ≤ 15 mm. Leak frequency data is not reported for internal corrosion; therefore, the total leak frequencies reported in Table 43 and Table 44 may be underestimated.

For leaks or ruptures due to ‘Ground Movement / Other’, the landslide potential in the study area was assumed to be “low to nil” in accordance with the description in Table B.15 of PD 8010-3:2009+A1:2013.

For leaks (other than ruptures) due to ‘Ground Movement / Other’, the estimated leak frequency was assumed to be distributed evenly across the other hole sizes (Note: There is no guidance in PD 8010-3:2009+A1:2013 on how to distribute the non-rupture events).

For leaks (other than ruptures) due to ‘TPA’, the estimated leak frequency was assumed to be distributed across the smaller hole sizes and weighted to the smaller hole size categories (Note: There is no guidance in PD 8010-3:2009+A1:2013 on how to distribute the non-rupture events).

The rupture frequency due to ‘TPA’ was derived from the generic pipeline failure frequency, which was modified in accordance with the relevant parameters for the pipelines (i.e. location, design factor, wall thickness and depth of cover).

Table 43 Approx. Leak Frequencies for Jemena Eastern Gas Pipeline (EGP)

Failure Mode	Approx. Leak Frequency (per km per yr)				Total Leak Frequency
	Pinhole (≤ 25 mm)	Small Hole (> 25 mm to ≤ 75 mm)	Large Hole (> 75 mm to ≤ 110 mm)	Rupture (> 110 mm)	
Mechanical Failure	1.7E-05	0.0E+00	0.0E+00	0.0E+00	1.7E-05
Corrosion	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
Ground Movement / Other	2.8E-07	2.8E-07	2.8E-07	2.2E-08	8.7E-07
TPA	3.8E-05	2.5E-05	1.3E-05	8.6E-05	1.6E-04

Failure Mode	Approx. Leak Frequency (per km per yr)				Total Leak Frequency
	Pinhole (≤ 25 mm)	Small Hole (> 25 mm to ≤ 75 mm)	Large Hole (> 75 mm to ≤ 110 mm)	Rupture (> 110 mm)	
Total Leak Freq. =	5.5E-05	2.6E-05	1.3E-05	8.6E-05	1.8E-04
% =	30.8	14.3	7.2	47.8	

Table 44 Approx. Leak Frequencies for Jemena Gas Network (CTM) Trunk Pipeline

Failure Mode	Approx. Leak Frequency (per km per yr)				Total Leak Frequency
	Pinhole (≤ 25 mm)	Small Hole (> 25 mm to ≤ 75 mm)	Large Hole (> 75 mm to ≤ 110 mm)	Rupture (> 110 mm)	
Mechanical Failure	1.7E-05	0.0E+00	0.0E+00	0.0E+00	1.7E-05
Corrosion	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
Ground Movement / Other	2.3E-07	2.3E-07	2.3E-07	6.8E-08	7.5E-07
TPA	1.3E-05	8.8E-06	4.4E-06	1.8E-05	4.4E-05
Total Leak Freq. =	3.0E-05	9.0E-06	4.6E-06	1.8E-05	6.2E-05
% =	49.3	14.6	7.5	28.6	

US Department of Transportation (DoT)

The Pipeline and Hazardous Materials Safety Administration (PHMSA), Accident Reports - Reported Data for Underground Natural Gas Steel Pipelines (January 2010 to September 2017) include incidents for Natural Gas transmission pipelines.

To enable a comparison with the UK data, the data for underground transmission pipelines was analysed and the leaks categorised using the same representative hole sizes as reported in the UK (i.e. RR1035 and PD8010). The results are reported in Table 45.

Period of Recorded Incident Data = 7.75 years (Jan 2010 to Sept 2017)

Total Length of Natural Gas Pipelines = 479980 km Note: Average for 2010 to 2017

Table 45 Leak Frequencies for Underground Natural Gas Transmission Pipelines

Failure Mode	Approx. Leak Frequency (per km per yr)				Total Leak Frequency
	Pinhole (≤ 25 mm)	Small Hole (> 25 mm to ≤ 75 mm)	Large Hole (> 75 mm to ≤ 110 mm)	Rupture (> 110 mm)	
Mechanical Failure	2.2E-06	5.4E-07	2.7E-07	0.0E+00	3.0E-06
Corrosion	9.7E-06	0.0E+00	2.7E-07	0.0E+00	9.9E-06
Ground Movement / Other	4.0E-06	1.1E-06	0.0E+00	2.7E-07	5.4E-06
TPA	3.2E-06	7.0E-06	4.0E-06	4.0E-06	1.8E-05
Total Leak Freq. =	1.9E-05	8.6E-06	4.6E-06	4.3E-06	3.7E-05
% =	52.2	23.5	12.5	11.8	

C.1.3 Likelihood of Representative Release Scenarios

The estimated likelihood of each representative release scenario is listed in Table 46, Table 47 and Table 48.

Table 46 Release Frequency – Ethane Pipeline

Leak Scenario	Release Frequency (per km per year)			Probability of scenario compared to total
	TPA	All Other Failure Modes	Total Release Frequency	
10mm MID		1.53E-04	1.53E-04	0.7200
10mm TOP		0.00E+00	0.00E+00	0.0000
25mm MID	2.20E-05		2.20E-05	0.1036
25mm TOP	0.00E+00		0.00E+00	0.0000
75mm MID	2.40E-06	5.94E-06	8.34E-06	0.0393
75mm TOP	0.00E+00	1.01E-05	1.01E-05	0.0476
110mm MID	1.00E-07	2.70E-06	2.80E-06	0.0132
110mm TOP	0.00E+00	4.60E-06	4.60E-06	0.0217
FBR	1.00E-07	1.15E-05	1.16E-05	0.0547
Total	2.46E-05	1.88E-04	2.124E-04	1.0000

Table 47 Release Frequency – Jemena Eastern Gas Pipeline (EGP)

Leak Scenario	Release Frequency (per km per year)			Probability of scenario compared to total
	TPA	All Other Failure Modes	Total Release Frequency	
10mm MID		2.08E-05	2.08E-05	0.4110
10mm TOP		0.00E+00	0.00E+00	0.0000
25mm MID	2.20E-05		2.20E-05	0.4347
25mm TOP	0.00E+00		0.00E+00	0.0000
75mm MID	8.88E-07	9.32E-07	1.82E-06	0.0360
75mm TOP	1.51E-06	1.59E-06	3.10E-06	0.0612
110mm MID	3.70E-08	6.29E-08	9.99E-08	0.0020
110mm TOP	6.30E-08	1.07E-07	1.70E-07	0.0034
FBR	1.00E-07	2.52E-06	2.62E-06	0.0518
Total	2.46E-05	2.60E-05	5.061E-05	1.0000

Table 48 Release Frequency – Jemena Gas Network Central Trunk Main (CTM)

Leak Scenario	Release Frequency (per km per year)			Probability of scenario compared to total
	TPA	All Other Failure Modes	Total Release Frequency	
10mm MID		2.08E-05	2.08E-05	0.4110
10mm TOP		0.00E+00	0.00E+00	0.0000
25mm MID	2.20E-05		2.20E-05	0.4347

Leak Scenario	Release Frequency (per km per year)			
	TPA	All Other Failure Modes	Total Release Frequency	
25mm TOP	0.00E+00		0.00E+00	0.0000
75mm MID	8.88E-07	9.32E-07	1.82E-06	0.0360
75mm TOP	1.51E-06	1.59E-06	3.10E-06	0.0612
110mm MID	3.70E-08	6.29E-08	9.99E-08	0.0020
110mm TOP	6.30E-08	1.07E-07	1.70E-07	0.0034
FBR	1.00E-07	2.52E-06	2.62E-06	0.0518
Total	2.46E-05	2.60E-05	5.061E-05	1.0000

C.2 Ignition Probability

The ignition probabilities adopted in the risk analysis are listed below. This was based on a review of relevant ignition probability data and ignition probability correlations (Refer to Sections C.2.1 - C.2.3).

Ethane

1. The total ignition probability was based on OGP Scenario 3, which is release rate dependent (Refer to Section C.2.1).

No historical ignition data was identified for ethane pipelines; however, it is typically grouped with other liquefied gases such as propane.

2. The total ignition probability was split 50:50 for immediate ignition: delayed ignition.

The OGP data assumes an immediate ignition probability of 0.001. A 50:50 split was assumed for the QRA.

Natural Gas

1. The total ignition probability was based on OGP Scenario 3, which is release rate dependent (Refer to Section C.2.1).

The correlation proposed by Acton & Baldwin (Refer to Section C.2.4) is more conservative for smaller leaks; however, the OGP data is more conservative for ruptures and is more consistent with the EGIG and UK HSE data (Refer to Section C.2.4) for the calculated full bore rupture release rates.

2. The total ignition probability was split 50:50 for immediate ignition: delayed ignition.

The OGP data assumes an immediate ignition probability of 0.001. A 50:50 split appears to be more consistent with other data sources (e.g. Acton & Baldwin, UK HSE – Refer to Section C.2.4).

Ignition data is usually reported by hole size rather than failure mode and inconsistent reporting of immediate ignition due to TPA (which is sometimes reported to be the highest immediate ignition probability and sometimes not) means it was not possible to estimate the immediate ignition probability based on failure mode.

C.2.1 Ignition Probability Data for Above Ground or Underground Cross-Country Pipelines – Various Materials

United Kingdom Onshore Pipeline Operators’ Association (UKOPA), Major Accident Hazard Pipelines (1962-2014)

The definition of a Major Accident Hazard Pipeline (MAHP) from the Pipelines Safety Regulations 1996 (PSR 96) includes various materials (e.g. including natural gas at >8 bar, flammable liquids, etc.). The pipeline may be above or below ground.

There were 9 out of 192 (4.7%) product loss incidents that resulted in ignition.

Table 49 Ignition Probability - UKOPA

Hole Size Class #	Total Number of Incidents	Number of Incidents with Ignition	Total Ignition Probability	Total Ignition Probability
Full Bore and Above	7	1	0.14	0.09
110mm – Full Bore	4	0	0.0	
40mm – 110mm	7	1	0.14	0.03
20mm – 40mm	23	0	0.0	
6mm – 20mm	31	3	0.10	0.05
0 – 6mm	118	4	0.03	
Unknown	2	0	0.0	0.0
Total =	192	9	0.047	0.047

OGP, Ignition Probabilities for Pipe-Gas-LPG-Industrial (Scenario 3: Gas or LPG release from onshore pipeline in an industrial or urban area)

The following data applies for releases of flammable gases, vapours or liquids significantly above their normal (Normal Atmospheric Pressure (NAP)) boiling point from onshore cross-country pipelines running through industrial or urban areas.

The OGP Data applies for cross-country pipelines. Although not explicitly stated, it is assumed the pipeline may be above ground or underground.

These curves represent “total” ignition probability. The method assumes that the immediate ignition probability is 0.001 and is independent of the release rate.

Table 50 Ignition Probability – OGP Scenario 3

Release Rate (kg/s)	Total Ignition Probability
0.1	0.0010
0.2	0.0017
0.5	0.0033
1	0.0056
2	0.0095
5	0.0188
10	0.0316
20	0.0532

Release Rate (kg/s)	Total Ignition Probability
50	0.1057
100	0.1778
200	0.2991
500	0.5946
1000	1.0000

C.2.2 Ignition Probability Data for Underground Cross-Country Pipelines – Flammable or Combustible Liquids

US Department of Transportation (DoT), Pipeline and Hazardous Materials Safety Administration (PHMSA), Accident Reports - Hazardous Liquid Pipeline Systems (January 2010 to September 2018)

Reporting of data is required by 49 CFR Part 195. An accident report is required for each failure in a pipeline system subject to this part in which there is a release of the hazardous liquid or carbon dioxide transported resulting in any of the following:

- (a) Explosion or fire not intentionally set by the operator.
- (b) Release of 5 gallons (19 litres) or more of hazardous liquid or carbon dioxide, except that no report is required for a release of less than 5 barrels (0.8 cubic meters) resulting from a pipeline maintenance activity if the release is:
 - (1) Not otherwise reportable under this section;
 - (2) Not one described in §195.52(a)(4);
 - (3) Confined to company property or pipeline right-of-way; and
 - (4) Cleaned up promptly;
- (c) Death of any person;
- (d) Personal injury necessitating hospitalisation;
- (e) Estimated property damage, including cost of clean-up and recovery, value of lost product, and damage to the property of the operator or others, or both, exceeding \$50,000.

Table 51 Ignition Probability – US DoT

Liquid	Leak			Mechanical Puncture			Other			Rupture			Total		
	# with Ignition	# with no ignition	Prob. of Ignition	# with Ignition	# with no ignition	Prob. of Ignition	# with Ignition	# with no ignition	Prob. of Ignition	# with Ignition	# with no ignition	Prob. of Ignition	# with Ignition	# with no ignition	Prob. of Ignition
HVLs *	0	46	0.0	0	7	0.0	4	2	0.7	5	5	0.5	9	60	0.13

* Highly Volatile Liquids (Includes Ethane).

C.2.3 Ignition Probability Data for Underground Cross-Country Pipelines – Gases Other Than Natural Gas

UK HSE (RR 1034) - Typical Event Tree Probabilities for Flammable Gas other than Natural Gas

The following data is proposed in RR 1034 for the HSE's computer program MISHAP to calculate the level of risk around Major Accident Hazard Pipelines (MAHPs), particularly in land use planning (LUP) assessments. A MAHP may be above or below ground; however, the MISHAP model appears to be primarily for underground pipelines. The probabilities are not reported for varying hole sizes and appear to be only applicable for larger release events.

For MISHAP, the risk associated with VCE events is negligible because the development of MISHAP (and its predecessors) was based on areas with low congestion and confinement (e.g. rural pipelines), which are not conducive for creating the large flammable clouds required by VCE. It is acknowledged in RR 1034 that this may require further review.

Table 52 Ignition Probability – UK HSE (RR 1034)

Outcome	Probability of Outcome		
	R12 Materials with a MIE < 0.2 mJ (1)	R12 Materials with a MIE ≥ 0.2 mJ (2)	R11 and Low Reactive Materials (3)
Immediate ignition, fireball and jet fire	0.350	0.300	0.250
Delayed ignition and jet fire	0.325	0.210	0.188
Delayed ignition, flash fire and jet fire	0.096	0.145	0.167
No ignition	0.229	0.345	0.396

(1) For example: ethylene

(2) For example: butane, ethane and propane

(3) For example: ammonia, carbon monoxide

C.2.4 Ignition Probability Data for Underground Cross-Country Pipelines – Natural Gas

Acton M R and Baldwin P J - Ignition Probability for High Pressure Gas Transmission Pipelines (7th International Pipeline Conference, IPC2008-64173, Sept 29 – Oct 3, 2008)

Note: Cited in IGEM/TD/2, Assessing the Risks from High Pressure Natural Gas Pipelines and HSE CRR 1034.

An analysis of historical data for rupture incidents shows the ignition probability increases linearly with pd^2 . The correlation derived for rupture releases takes the form:

$$P_{ign} = 0.0555 + 0.0137 pd^2; 0 \leq pd^2 \leq 57$$

$$P_{ign} = 0.81; pd^2 > 57$$

P_{ign} = probability of ignition

p = pipeline operating pressure (bar)

d = pipeline diameter for ruptures (m)

The probability of ignition P_{ign} , calculated as detailed above, is then generally apportioned as 0.5 for immediate ignition and 0.5 for delayed ignition, where delayed ignition occurs after 30 seconds.

This correlation is for ignition by all causes and is applicable to underground cross-country pipelines carrying high pressure natural gas. It does not take the location of the pipeline (e.g. rural or urban) or the cause of failure (e.g. external) into consideration. The following data was combined to derive the correlation:

- Transmission pipeline incident data recorded between 1970 and 2004; and
- US Office of Pipeline Safety Office (OPS) data between 2002 and 2007.

The authors state that the total ignition probability for releases caused by external interference, such as excavating machinery, is much lower than releases caused by other means (viz. 0.11 vs. 0.34 for pipeline ruptures from 1970 to 2004).

For puncture releases (all causes), the same ignition probability relationship may be applied, with d equal to the release hole diameter and with the pd^2 value halved, reflecting the difference between the two sources following a rupture and the single source contributing to a puncture release.

Table 53 Ignition Probability – Acton & Baldwin

Pipeline Diameter (mm)	Operating Pressure (bar)	Equivalent Hole Diameter (mm)	pd^2	Probability of Immediate Ignition	Probability of Delayed Ignition	Total Ignition Probability
433.6	148.95	FBR	28.00	0.220	0.220	0.439
		110	1.80	0.034	0.034	0.068
		75	0.84	0.031	0.031	0.061
		25	0.09	0.028	0.028	0.056
		10	0.01	0.028	0.028	0.056
836.8	50	FBR	35.01	0.268	0.268	0.535
		110	77.03	0.030	0.030	0.060
		75	52.52	0.029	0.029	0.057
		25	0.03	0.028	0.028	0.056
		10	0.01	0.028	0.028	0.056

EGIG (9th Report, 2015), Natural Gas Transmission Pipelines (1971-2013)

Although the pipeline definition does not preclude above ground pipelines, the data is predominantly for underground natural gas transmission pipelines with a maximum operating pressure > 15 bar.

In the period 1970 - 2013, only 5% of the gas releases recorded as incidents in the EGIG database ignited.

Table 54 Ignition Probability – EGIG

Hole Size Class		Total Ignition Probability
Rupture (FB and Above)	All diameters	0.139
	<= 16 inches	0.103
	> 16 inches	0.32
Hole (>20 mm to FB)		0.023
Pinhole / Crack (Up to 20 mm)		0.044

UK HSE (RR 1034) - Typical Event Tree Probabilities for Natural Gas

The following data is proposed in RR 1034 for the UK HSE's computer program MISHAP. This program is used by the UK HSE to calculate the level of risk around Major Accident Hazard Pipelines (MAHPs), particularly in land use planning (LUP) assessments.

A MAHP may be above or below ground; however, the MISHAP model appears to be primarily for underground pipelines. The probabilities are not reported for varying hole sizes or operating pressures (i.e. are not release rate dependent) and appear to be only applicable for larger release events (i.e. ruptures).

For example, the literature cited in RR 1034 indicates an overall ignition probability between 0.2 and 0.5 for larger releases of natural gas, depending on the degree of confinement. On this basis, the total ignition probability proposed in CR 1034 for natural gas is 0.44.

It is reported in RR 1034 that the risk associated with VCE events is negligible because the development of MISHAP (and its predecessors) was based on areas with low congestion and confinement (e.g. rural pipelines), which are not conducive for creating the large flammable clouds required for a VCE. It is acknowledged in RR 1034 that this may require further review.

The proposed conditional probability value for delayed remote ignition is zero. It is reported in RR 1034 that this is "to take into account the reasoning that natural gas is unlikely to form a significant vapour cloud due to its buoyant nature".

Table 55 Ignition Probability – UK HSE (RR 1034)

Outcome	Probability of Outcome
Immediate ignition, fireball and jet fire	0.250
Delayed ignition and jet fire	0.188
Delayed ignition, flash fire and jet fire	0.000
No ignition	0.563

Note: Some of the sources cited in RR 1034 with an overall ignition probability between 0.2 and 0.5 are relatively old (c. mid 1980s - See below). This data would also appear to confirm that the total ignition probability proposed for natural gas in MISHAP is for a worst-case rupture event on a larger transmission pipeline.

Table 56 Ignition Probability – Data Cited by UK HSE (RR 1034)

Data source	Ignition probability	
World-wide, Townsend & Fearnough (1986)	Leaks	0.1
	Ruptures	0.5
US Gas, Jones (1986)	Ruptures	0.26
	All sizes	0.16
European Gas, European Gas Pipeline Incident Data Group (1988)	Pinholes / cracks	0.02
	Holes	0.03
	Ruptures < 16"	0.05
	Ruptures ≥ 16"	0.35

	All sizes	0.03
--	-----------	------